

TOMO FUJITA SIGNATURE

TF-1250

A touch sensitive, bright and chimey vintage American tone with tight, punchy lows and nice, even mids. The 30 oz. ceramic magnet provides lower efficiency, which allows you to find the amp's sweet spot at lower volumes.

12" | 50 WATTS
8 Ω



"I feel lucky to have worked with Eminence since 2002, and my signature speaker is very special for me to achieve great quality vintage tone using modern technology." – Tomo Fujita

SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	50 W
Resonance (Fs)	95 Hz
Usable Frequency Range	80 Hz – 4.4 kHz
Sensitivity*	101.3 dB
DC Resistance (Re)	7.23 Ω
Qts	0.88
Magnet Weight	30 oz.
Gap Height	0.31", 8 mm
Voice Coil Diameter	1.5", 38 mm


MOUNTING INFORMATION

Enclosure Type	Closed Back
Open Back	Acceptable
Driver Volume Displaced	0.068 cu.ft., 1.93 liters
Overall Diameter	12.17", 309.1 mm
Baffle Hole Diameter	11.13", 282.7 mm
Depth	4.97", 126.2 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	No
Mounting Holes Diameter	0.24", 6.1 mm
Mounting Holes B.C.D.	11.75", 298.5 mm
Net Weight	6.6 lbs , 2.99 kg
Shipping Weight	8.6 lbs , 3.9 kg

MATERIALS OF CONSTRUCTION

Copper voice coil
Polyimide former
Ferrite magnet
Non-vented core
Pressed steel basket
Full molded paper cone
Paper cone edge
Paper dust cap

FREQUENCY RESPONSE & IMPEDANCE CURVE*

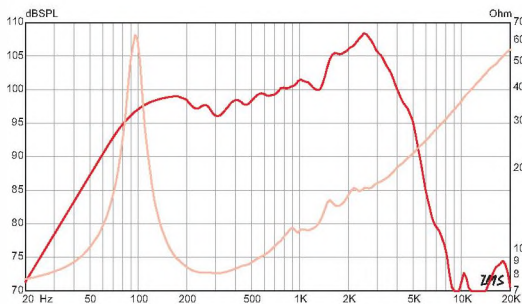

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.