

XXLS 12" Automotive



Type Number: 830877

Features:

This new series of state-of-the-art subwoofers continue to enhance Peerless' reputation for delivering the highest quality components for bass in the world. Called the XXLS - for "Xpanded Extra Long Stroke" - these new audio transducers add even more excursion to the Peerless XLS line, and completely eliminate distortion.

See architecture notes for [XXLS Platform](#)

Driver Highlights: Thick Nomex cone, 51 mm voice coil, ALP

[Go to Architecture Notes](#)



Specs:

Electrical Data

Nominal impedance	Zn	4	ohm
Minimum impedance	Zmin	2.2	ohm
Maximum impedance	Zo	25.7	ohm
DC resistance	Re	1.7	ohm
Voice coil inductance	Le	1.3	mH
Capacitor in series with x ohm	Cc	--	uF

T-S Parameters

Resonance Frequency	fs	35	Hz
Mechanical Q factor	Qms	7.31	
Electrical Q factor	Qes	0.52	
Total Q factor	Qts	0.49	
Force factor	Bl	10.6	Tm
Mechanical resistance	Rms	4.69	Kg/s
Moving mass	Mms	156.1	g
Suspension compliance	Cms	0.13	mm/N
Effective cone diameter	D	24.4	cm
Effective piston area	Sd	466	cm ²
Equivalent volume	Vas	39.9	ltrs
Sensitivity (2.83V/1m)		94.3	dB
Ratio BL/√(Re)		8.1	
Ratio fs/Qts	F	71	

Power handling


100h RMS noise test (IEC)	--	W
Long-term Max Power (IEC 18.3)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power (IEC 18.2)	--	W

Voice Coil and Magnet Parameters

Voice coil diameter	51	mm
Voice coil height	33	mm
Voice coil layers	4	
Height of the gap	8	mm
Linear excursion +/-	12.5	mm
Max mech. excursion +/-	--	mm
Flux density of gap	--	mWb
Total useful flux	2.4	mWb
Diameter of magnet	147	mm
Height of magnet	35	mm
Weight of magnet	2.4	Kg

Notes:
IEC specs refer to IEC 60268-5 third edition.
All Tymphany products are RoHS compliant.

Frequency: 830877

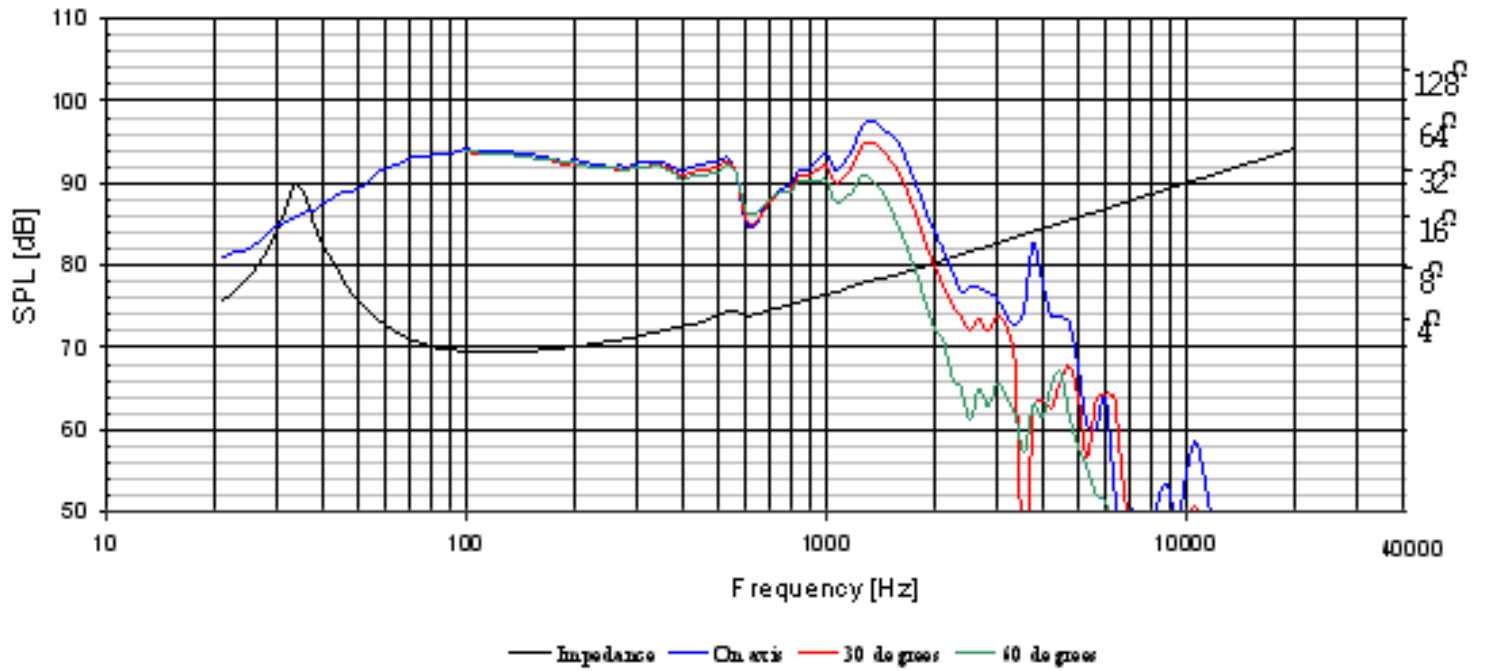

Mechanical Dimensions:830877

