

## CONE MIDRANGE LOUDSPEAKER GDM 10/60/2



### TECHNICAL DATA

Rated impedance	4	8	Ω
Voice coil resistance	3,3	7	Ω
Rated frequency range	1 to 9		kHz
Resonance frequency	580		Hz
Recommended crossover frequency	1		kHz
Power handling capacity, P1/P2	measured with filter		
Max. power	60/18	W	
Sensitivity	90/25	W	
Flux density	91	dB	
Energy in air gap	0,88	T	
Air - gap	86,3	mJ	
Voice coil height	20/4,6/0,95	mm	
Magnet	5,6	6,4	mm
- material	ferrite		
- dimensions	70/32/10	mm	
- mass	0,15	kg	
Mass of loudspeaker	0,5	kg	

Connection is by 2,8 mm x 0,5 mm tag connectors or by soldering.

### AVAILABLE VERSIONS

- GDM 10/60/2 - 8Ω, catalogue number 9 5153 001 01
- GDM 10/60/2 - 4Ω, catalogue number 9 5153 001 05

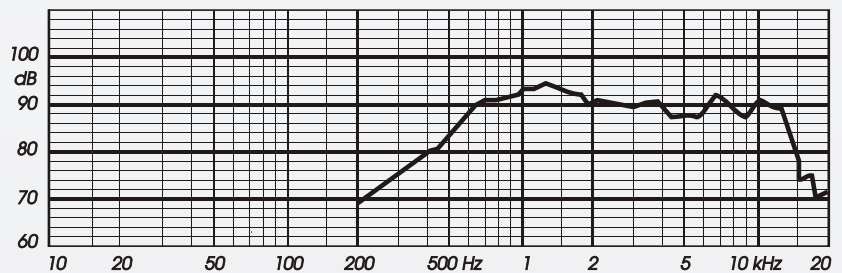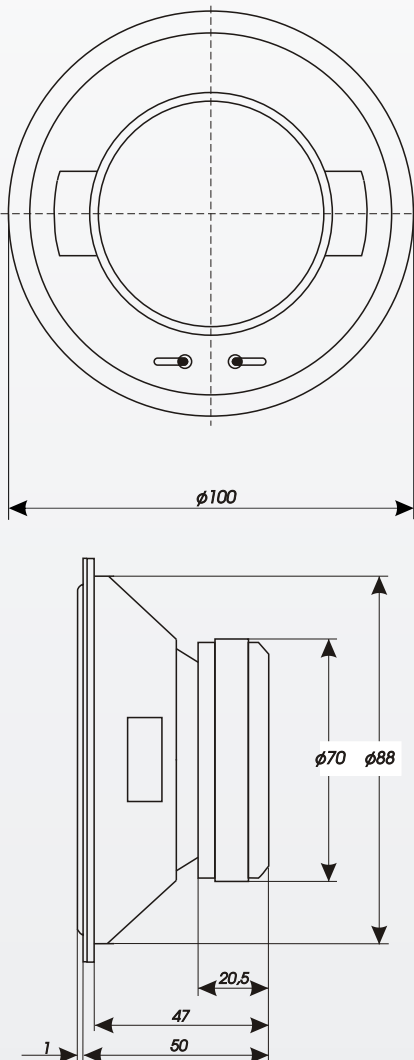

### FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted in sealed 3 dm<sup>3</sup> enclosure.