

K20.40

Rectangular miniature speaker (2941)



General description

Rectangular miniature speaker. Thanks to its compact dimensions, suitable for signal output in machines and other equipment where space is at a premium.

Typical applications:

- Voice and signal output in machines and other equipment both indoors and outdoors.

Attributes:

- Plastic basket
- UV-resistant

Rated power 1 W

Maximum power 2 W

Nominal impedance 2.8 Ohm

Frequency response 300–20000 Hz

Mean sound pressure level 76 dB (1 W/1 m)

Resonance frequency f_s 600 Hz

Height of front pole-plate 1 mm

Voice coil diameter 12 mm


Cutout diameter 38 x 18 mm

Net weight 0,007 kg

Connections 2,8 x 0,3 mm

(Lötöse/solder lug)

Heat resistance –25 ... 60 °C

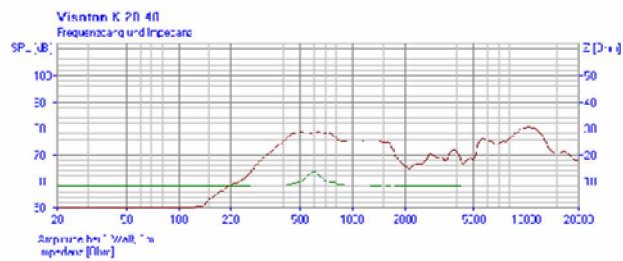

frequency response

