


GENERAL CHARACTERISTICS		
Nominal Overall Diameter	306 mm	12 in
Nominal Voice Coil Diameter	32 mm	1.25 in
Magnet Weight	426 g	15 oz
Overall Weight		4.10 lbs
Flux Density		0.92 T


ELECTRICAL CHARACTERISTICS	8 Ω		16 Ω	
	Nominal Impedance	8	16	Ω
Rated Power	35	35	W	
Musical Power	70	70	W	
Sensitivity@1W,1m	94.6	93.9	db	

THIELE-SMALL PARAMETERS		8 Ω		16 Ω	
Voice Coil DC Resistance	R_E	6.36	12.00	Ω	
Resonance Frequency	f_S	87.3	87.0	Hz	
Mechanical Q Factor	Q_{MS}	13.14	10.16		
Electrical Q Factor	Q_{ES}	1.94	2.47		
Total Q Factor	Q_{TS}	1.69	1.99		
Mechanical Moving Mass	M_{MS}	25.5	24.3	g	
Mechanical Compliance	C_{MS}	130	137	μm/N	
Force Factor	B_{XL}	6.78	8.16	Wb/m	
Equivalent Acoustic Volume	V_{AS}	44.1	46.3	lt.	
Maximum Linear Displacement	X_{MAX}	1.5	1.5	mm	
Reference Efficiency	η_0	1.45	1.20	%	
Diaphragm Area	S_D	490.8	490.8	cm ²	
Losses Electrical Resistance	R_{ES}	43.2	50.0	Ω	
Voice Coil Inductance @ 1kHz	L_E	0.63	0.95	mH	

CONSTRUCTIVE CHARACTERISTICS	
Magnet	Ferrite
Voice Coil Winding	Copper
Voice Coil Former	Epotex
Cone	Paper
Surround	Integrated Paper
Dust Dome	Solid Paper
Basket	Pressed Sheet Steel

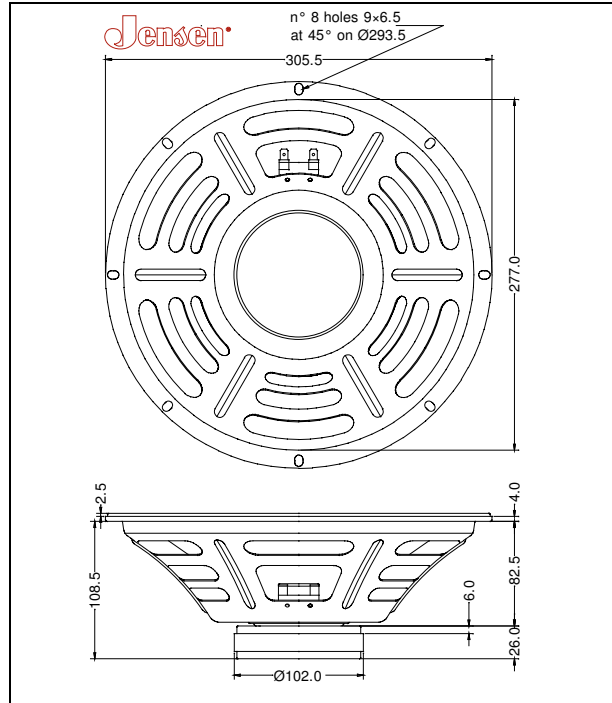

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Free Air Impedance

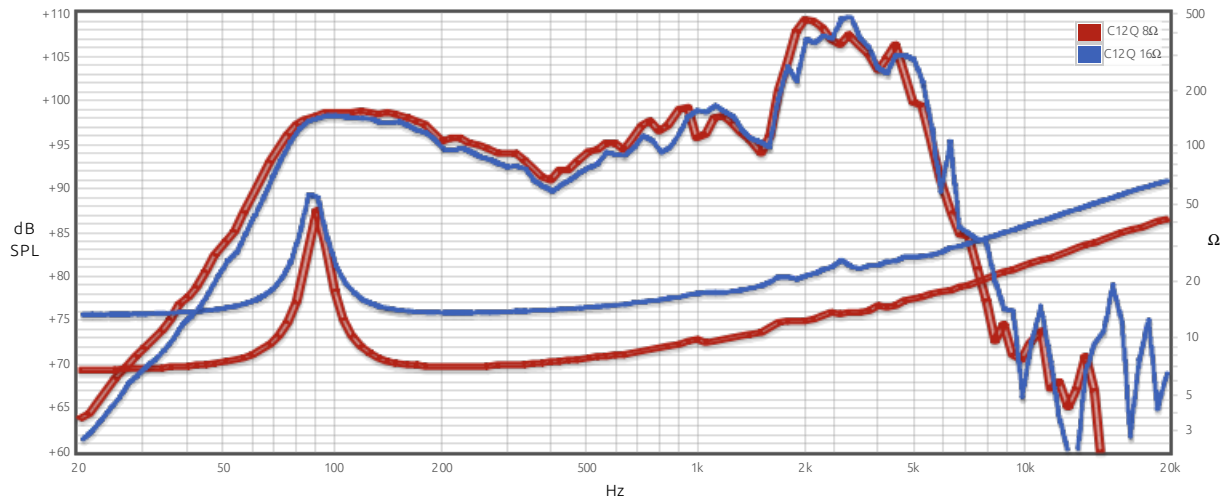

Due to continuing product improvement, the features and the design are subject to change without notice.