

## DOME TWEETER LOUDSPEAKER GDWK 10/80/26


### TECHNICAL DATA

|                                 |             |     |
|---------------------------------|-------------|-----|
| Rated impedance                 | 8           | Ω   |
| Voice coil resistance           | 6,3         | Ω   |
| Rated frequency range           | 4 to 25     | kHz |
| Resonance frequency             | -           | kHz |
| Recommended crossover frequency | 4,8         | kHz |
| Power handling capacity, P1/P2  |             |     |
| measured with filter            | 100/7       | W   |
| Max. power                      | 160/10      | W   |
| Sensitivity                     | 93          | dB  |
| Flux density                    | 1,42        | T   |
| Energy in air gap               | 130         | mJ  |
| Air - gap                       | 25/3/0,745  | mm  |
| Voice coil height               | 1,9         | mm  |
| Magnet                          |             |     |
| - material                      | ferrite     |     |
| - dimensions                    | 2x 70/32/15 | mm  |
| - mass                          | 0,46        | kg  |
| Mass of loudspeaker             | 0,83        | kg  |

The loudspeaker has flexible wire leads, an aluminium voice coil former and polyester cloth.

### AVAILABLE VERSIONS

- GDWK 10/80/26 - 8 Ω, catalogue number 9 5155 185 01

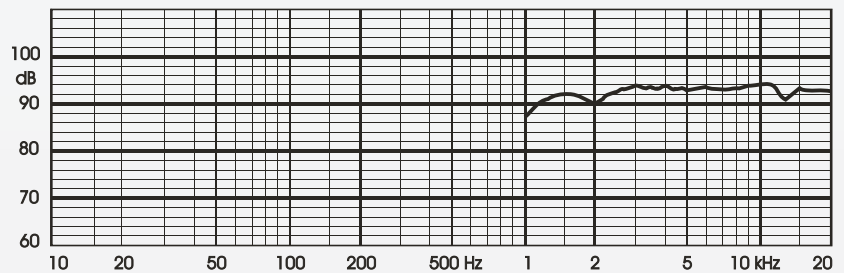

### FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted on IEC baffle.