


3-TERMINAL LOW DROPOUT VOLTAGE REGULATOR

KA76L05 is an adjustable 3-terminal low dropout voltage regulator designed to need very low quiescent current. Internally, implemented circuits include 60V load dump protection, - 50V reverse transient short circuit and thermal over load protection.

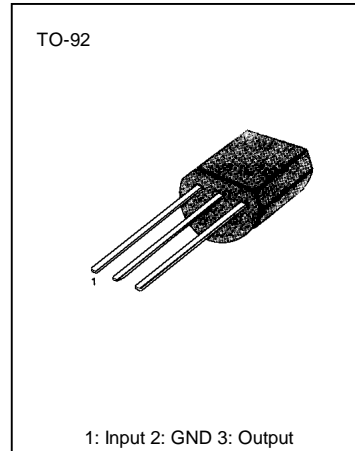


FEATURES

- Limited input voltage and high efficiency.
- Internal thermal over load protection.
- 60V load dump protection.
- Output current up to 0.1A.

ORDERING INFORMATION

Device	Package	Operating Temperature
KA76L05Z	TO-92	-40- +125°C

BLOCK DIAGRAM

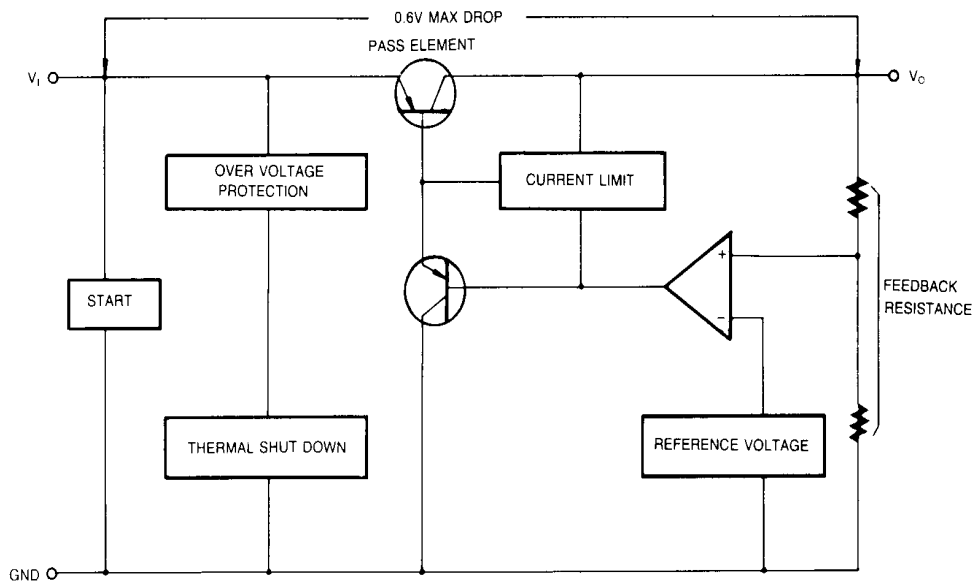

ABSOLUTE MAXIMUM RATINGS


Characteristic	Symbol	Value	Unit
Input Voltage	V_I	33	V
Over Protection Voltage	$V_{(OP)}$	60	V
Operating Temperature Range	T_{OPR}	-40~ +125	°C
Maximum Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	- 65 ~ +150	°C

ELECTRICAL CHARACTERISTICS ($V_I=14V$, $I_O=10mA$, $C_O=100\mu F$, $T_A=25^\circ C$)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage (I)	V_O (I)	$V_I = 14V$, $I_O = 10mA$	4.81	5.0	5.19	V
Output Voltage (II)	V_O (II)	$V_I = 6 \sim 26V$, $I_O = 100mA$ $T_J = -40 \sim +125^\circ C$	4.75	5.0	5.25	V
Line Regulation (I)	ΔV_O (I)	$V_I = 9 \sim 16V$, $I_O = 10mA$	—	2.0	10	mV
Line Regulation (II)	ΔV_O (II)	$V_I = 6 \sim 26V$, $I_O = 10mA$	—	4.0	30	mV
Load Regulation	ΔV_O (III)	$V_I = 14V$, $I_O = 5 \sim 100mA$	—	10	50	mV
Output Impedance	Z_O	$V_I = 14V$, $I_O = 100mA$	—	100	600	$m\Omega$
Quiescent Current (I)	I_Q (I)	$V_I = 6 \sim 26V$, $I_O \leq 10mA$	—	0.1	1.0	mA
Quiescent Current (II)	I_Q (II)	$V_I = 14V$, $I_O \leq 100mA$	—	5.0	30	mA
Output Noise Voltage	V_N	$V_I = 14V$, $I_O = 10mA$, $f = 10Hz \sim 100KHz$	—	150	1000	μV_{rms}
Ripple Rejection	RR	$V_I = 14V$, $I_O = 10mA$, $f = 120Hz$	55	80	—	dB
Dropout Voltage (I)	V_D (I)	$I_O = 10mA$, $V_O = V_I - V_D$	—	0.03	0.2	V
Dropout Voltage (II)	V_D (II)	$I_O = 100mA$, $V_D = V_{IN} - V_O$	—	0.1	0.6	V
Max Operational Input Voltage	V_{IN}	$I_O = 10mA$	26	33	—	V
Max Line Transient	$V_{LT(MAX)}$	$V_I = 14V$, $I_O = 10mA$, Time = 100ms	60	70	—	V
Reverse Polarity Input Voltage DC	$V_{I(DC)}$	$V_I = 14V$, $I_O = 10mA$, $V_O \geq -0.3V$	- 15	- 30	—	V
Reverse Polarity Input Voltage Transient	$V_{I(TR)}$	$V_I = 14V$, $I_O = 10mA$, Time $\leq 10ms$	- 50	- 80	—	V
Peak Output Current	I_{PK}	$V_I = 14V$	200	400	600	mA

TO-92

Dimensions in Millimeters

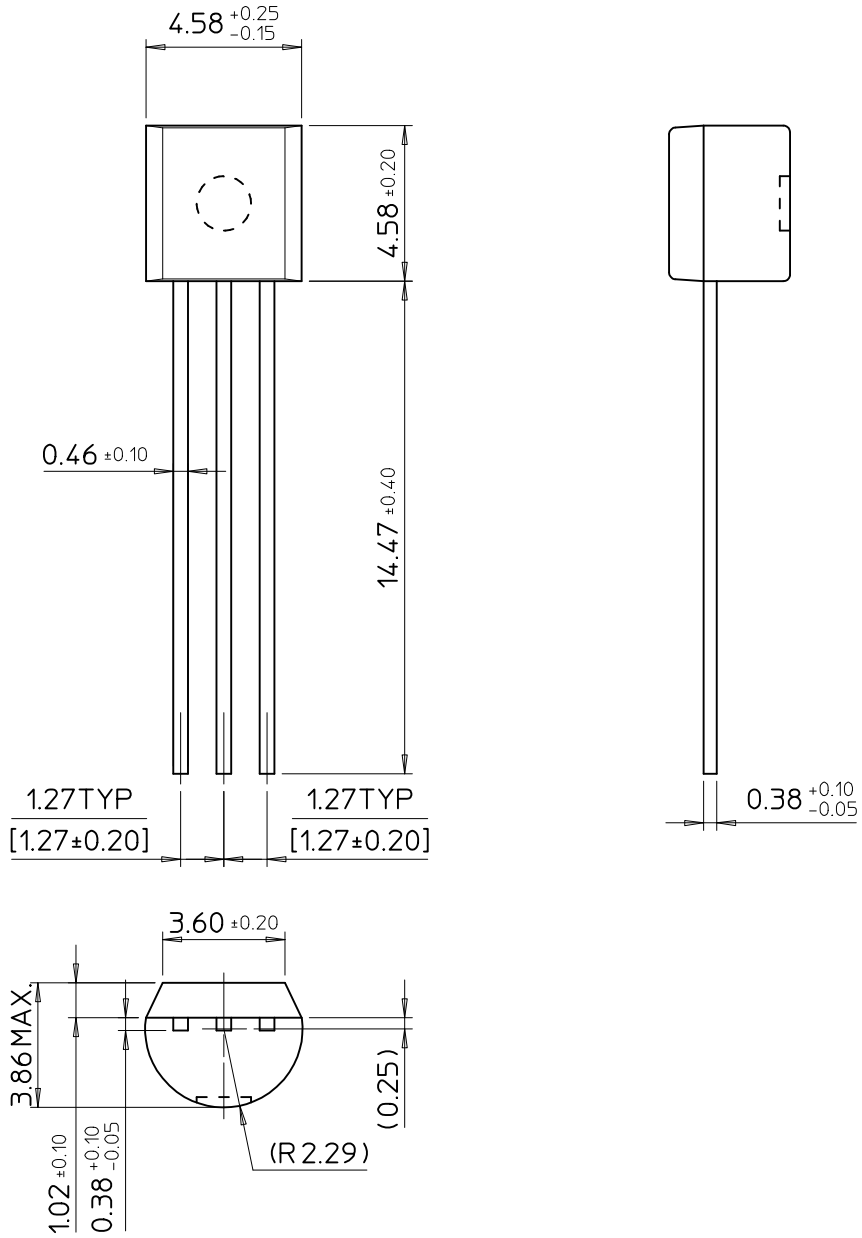

SAMSUNG ELECTRONICS CO.,LTD.