


# KA78MXX/I

# FIXED VOLTAGE REGULATOR (POSITIVE)

## 3-TERMINAL 0.5A POSITIVE VOLTAGE REGULATORS

The KA78MXXC/I series of three-terminal positive regulators are available in the TO-220 package with several fixed output voltages making it useful in a wide range of applications.

TO-220



1:Input 2: GND 3: Output


### FEATURES

- Output Current up to 0.5A
- Output Voltages of 5; 6; 8; 10; 12; 15; 18; 20; 24V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor SOA Protection
- Industrial and commercial temperature range

### ORDERING INFORMATION

Device	Package	Operating Temperature
KA78MXX	TO-220	0 ~ +125°C
KA78MXXI	TO-220	-40 ~ +125°C

### BLOCK DIAGRAM

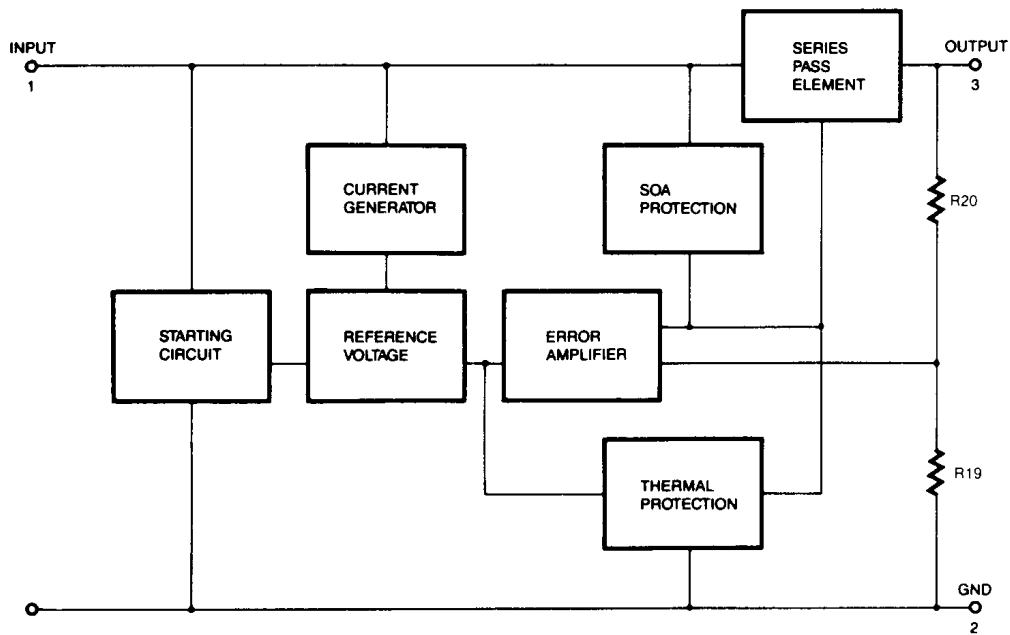

**ABSOLUTE MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

Characteristic	Symbol	Value	Unit
Input Voltage (for $V_O = 5\text{V}$ to $18\text{V}$ ) (for $V_O = 24\text{V}$ )	$V_I$	35	V
	$V_I$	40	V
Thermal Resistance Junction-Cases	$R_{EJC}$	5	$^\circ\text{C}/\text{W}$
Thermal Resistance Junction-Air	$R_{EJA}$	65	$^\circ\text{C}/\text{W}$
Operating Temperature Range KA78XXI KA78XX	$T_{OPR}$	-40~ + 125	$^\circ\text{C}$
		0~ + 125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65~ + 150	$^\circ\text{C}$

**KA78M05/I ELECTRICAL CHARACTERISTICS**

(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=10\text{V}$ , unless otherwise specified,  $C_I = 0.33 \mu\text{F}$ ,  $C_O=0.1 \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	4.8	5	5.2	V
		$I_O = 5$ to $350\text{mA}$ $V_I = 7$ to $20\text{V}$	4.75	5	5.25	
Line Regulation	$\Delta V_O$	$I_O = 200\text{mA}$ $T_J = 25^\circ\text{C}$	$V_I = 7$ to $25\text{V}$		100	mV
			$V_I = 8$ to $25\text{V}$		50	
Load Regulation	$\Delta V_O$	$I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = 25^\circ\text{C}$			100	mV
		$I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = 25^\circ\text{C}$			50	
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$		4.0	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O = 5\text{mA}$ to $350\text{mA}$			0.5	mA
		$I_O = 200\text{mA}$ $V_I = 8$ to $25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O = 5\text{mA}$ $T_J = 0$ to $125^\circ\text{C}$		- 0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f = 10\text{Hz}$ to $100\text{KHz}$		40		$\mu\text{V}$
Ripple Rejection	RR	$f = 120\text{Hz}$ , $I_O = 300\text{mA}$ $V_I = 8$ to $18\text{V}$	62			dB
Dropout Voltage	$V_D$	$T_J = 25^\circ\text{C}$ , $I_O = 500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J = 25^\circ\text{C}$ , $V_I = 35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J = 25^\circ\text{C}$		700		mA

\*  $T_{MIN} < T_J < T_{MAX}$

KA78MXXI :  $T_{MIN} = -40^\circ\text{C}$ ,  $T_{MAX} = +125^\circ\text{C}$

KA78MXX :  $T_{MIN} = 0^\circ\text{C}$ ,  $T_{MAX} = +125^\circ\text{C}$

\* Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**KA78M06/I ELECTRICAL CHARACTERISTICS**(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=11\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	5.75	6	6.25	V
		$I_O=5\text{ to }350\text{mA}$ $V_I=8\text{ to }21\text{V}$	5.7	6	6.3	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$	$V_I=8\text{ to }25\text{V}$		100	mV
			$V_I=9\text{ to }25\text{V}$		50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA to }0.5\text{A}$ , $T_J=25^\circ\text{C}$			120	mV
		$I_O=5\text{mA to }200\text{mA}$ , $T_J=25^\circ\text{C}$			60	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.0	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA to }350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=9\text{ to }25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0\text{ to }125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz to }100\text{KHz}$		45		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=9\text{ to }19\text{V}$	59			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$ KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$ KA78MXX:  $T_{MIN}=0^\circ\text{C}$ \* Load and line regulation are specified at constant, junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**KA78M08/I ELECTRICAL CHARACTERISTICS**(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=14\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	7.7	8	8.3	V
		$I_O=5$ to $350\text{mA}$ $V_I=10.5$ to $23\text{V}$	7.6	8	8.4	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$	$V_I=10.5$ to $25\text{V}$		100	mV
			$V_I=11$ to $25\text{V}$		50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA}$ to $0.5\text{A}$ , $T_J=25^\circ\text{C}$			160	mV
		$I_O=5\text{mA}$ to $200\text{mA}$ , $T_J=25^\circ\text{C}$			80	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.0	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA}$ to $350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=10.5$ to $25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0$ to $125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz}$ to $100\text{KHz}$		52		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=9$ to $19\text{V}$	56			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$ KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$ KA78MXX:  $T_{MIN}=0^\circ\text{C}$ \* Load and line regulation are specified at constant, junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**KA78M10/I ELECTRICAL CHARACTERISTICS**(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=17\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	9.6	10	10.4	V
		$I_O=5\text{ to }350\text{mA}$ $V_I=12.5\text{ to }25\text{V}$	9.5	10	10.5	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$	$V_I=12.5\text{ to }25\text{V}$		100	mV
			$V_I=13\text{ to }25\text{V}$		50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA to }0.5\text{A}$ , $T_J=25^\circ\text{C}$			200	mV
		$I_O=5\text{mA to }200\text{mA}$ , $T_J=25^\circ\text{C}$			100	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.1	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA to }350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=12.5\text{ to }25\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0\text{ to }125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz to }100\text{kHz}$		65		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=13\text{ to }23\text{V}$	55			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$ KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$ KA78MXX:  $T_{MIN}=0^\circ\text{C}$ \* Load and line regulation are specified at constant, junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## KA78M12/I ELECTRICAL CHARACTERISTICS

(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=19\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	11.5	12	12.5	V
		$I_O=5\text{ to }350\text{mA}$ $V_I=14.5\text{ to }27\text{V}$	11.5	12	12.6	
Lines Regulation	$\Delta V_O$	$I_O=200\text{mA}$		$V_I=14.5\text{ to }30\text{V}$	100	mV
		$T_J=25^\circ\text{C}$		$V_I=16\text{ to }30\text{V}$	50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA to }0.5\text{A}$ , $T_J=25^\circ\text{C}$			240	mV
		$I_O=5\text{mA to }200\text{mA}$ , $T_J=25^\circ\text{C}$			120	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.1	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA to }350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=14.5\text{ to }30\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0\text{ to }125^\circ\text{C}$		-0.5		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz to }100\text{kHz}$		75		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=15\text{ to }25\text{V}$	55			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$

KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$

KA78MXX:  $T_{MIN}=0^\circ\text{C}$

\* Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## KA78M15/I ELECTRICAL CHARACTERISTICS

(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=23\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	14.4	15	15.6	V
		$I_O=5$ to 350mA $V_I=17.5$ to 30V	14.25	15	15.75	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$			100	mV
		$V_I=17.5$ to 30V $V_I=20$ to 30V			50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA}$ to 0.5A, $T_J=25^\circ\text{C}$			300	mV
		$I_O=5\text{mA}$ to 200mA, $T_J=25^\circ\text{C}$			150	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.1	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA}$ to 350mA			0.5	mA
		$I_O=200\text{mA}$ $V_I=17.5$ to 30V			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0$ to $125^\circ\text{C}$		-1		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz}$ to 100KHz		100		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=18.5$ to 28.5V	54			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$   
 KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$   
 KA78MXX:  $T_{MIN}=0^\circ\text{C}$

\* Load and line regulation are specified at constant, junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**KA78M18/I ELECTRICAL CHARACTERISTICS**(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=26\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	17.3	18	18.7	V
		$I_O=5\text{ to }350\text{mA}$ $V_I=20.5\text{ to }33\text{V}$	17.1	18	18.9	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$			100	mV
		$V_I=21\text{ to }33\text{V}$ $V_I=24\text{ to }33\text{V}$			50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA to }0.5\text{A}$ , $T_J=25^\circ\text{C}$			360	mV
		$I_O=5\text{mA to }200\text{mA}$ , $T_J=25^\circ\text{C}$			180	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.2	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA to }350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=21\text{ to }33\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0\text{ to }125^\circ\text{C}$		-1.1		mV/°C
Output Noise Voltage	$V_N$	$f=10\text{Hz to }100\text{KHz}$		100		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=22\text{ to }32\text{V}$	53			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$ KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$ KA78MXX:  $T_{MIN}=0^\circ\text{C}$ \* Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.



## KA78M20/I ELECTRICAL CHARACTERISTICS

(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=29\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	19.2	20	20.8	V
		$I_O=5$ to $350\text{mA}$ $V_I=23$ to $35\text{V}$	19	20	21	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$			100	mV
		$V_I=23$ to $35\text{V}$ $V_I=24$ to $35\text{V}$			50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA}$ to $0.5\text{A}$ , $T_J=25^\circ\text{C}$			400	mV
		$I_O=5\text{mA}$ to $200\text{mA}$ , $T_J=25^\circ\text{C}$			200	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.2	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA}$ to $350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=23$ to $35\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0$ to $125^\circ\text{C}$		-1.1		mV/°C
Output Noise Voltage	$V_N$	$f=10\text{Hz}$ to $100\text{kHz}$		110		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=24$ to $34\text{V}$	53			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$   
 KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$   
 KA78MXX:  $T_{MIN}=0^\circ\text{C}$

\* Load and line regulation are specified at constant, junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## KA78M24/I ELECTRICAL CHARACTERISTICS

(Refer to the test circuits,  $T_{MIN} \leq T_J \leq 125^\circ\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=33\text{V}$ , unless otherwise specified,  $C_I=0.33\ \mu\text{F}$ ,  $C_O=0.1\ \mu\text{F}$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	$V_O$	$T_J=25^\circ\text{C}$	23	24	25	V
		$I_O=5$ to $350\text{mA}$ $V_I=27$ to $38\text{V}$	22.8	24	25.2	
Line Regulation	$\Delta V_O$	$I_O=200\text{mA}$ $T_J=25^\circ\text{C}$			100	mV
		$V_I=27$ to $38\text{V}$ $V_I=28$ to $38\text{V}$			50	
Load Regulation	$\Delta V_O$	$I_O=5\text{mA}$ to $0.5\text{A}$ , $T_J=25^\circ\text{C}$			480	mV
		$I_O=5\text{mA}$ to $200\text{mA}$ , $T_J=25^\circ\text{C}$			240	
Quiescent Current	$I_Q$	$T_J=25^\circ\text{C}$		4.2	6	mA
Quiescent Current Change	$\Delta I_Q$	$I_O=5\text{mA}$ to $350\text{mA}$			0.5	mA
		$I_O=200\text{mA}$ $V_I=27$ to $38\text{V}$			0.8	
Output Voltage Drift	$\frac{\Delta V_O}{\Delta T}$	$I_O=5\text{mA}$ $T_J=0$ to $125^\circ\text{C}$		-1.2		mV/ $^\circ\text{C}$
Output Noise Voltage	$V_N$	$f=10\text{Hz}$ to $100\text{kHz}$		170		$\mu\text{V}$
Ripple Rejection	RR	$f=120\text{Hz}$ , $I_O=300\text{mA}$ $V_I=28$ to $38\text{V}$	50			dB
Dropout Voltage	$V_D$	$T_J=25^\circ\text{C}$ , $I_O=500\text{mA}$		2		V
Short Circuit Current	$I_{SC}$	$T_J=25^\circ\text{C}$ , $V_I=35\text{V}$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ\text{C}$		700		mA

\* $T_{MIN}$   
 KA78MXXI:  $T_{MIN}=-40^\circ\text{C}$   
 KA78MXX:  $T_{MIN}=0^\circ\text{C}$

\* Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

APPLICATION CIRCUIT

Fig. 1 Fixed output regulator






Fig. 2 Constant current regulator

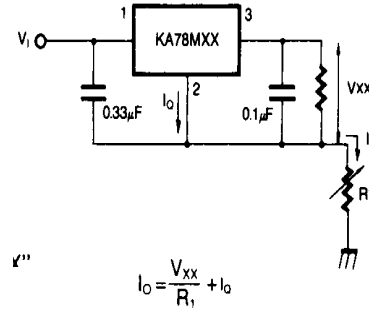

Notes:

- (1) To specify an output voltage, substitute voltage value for "XX".
- (2) Although no output capacitor is needed for stability, it does improve transient response.
- (3) Required if regulator is located an appreciable distance from power supply filter.

Fig. 3 Circuit for Increasing output voltage

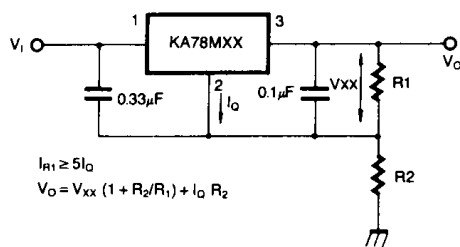

$$I_{R1} \geq 5I_o$$

$$V_o = V_{xx} (1 + R_2/R_1) + I_o R_2$$

Fig. 4 Adjustable output regulator (7 to 30V)


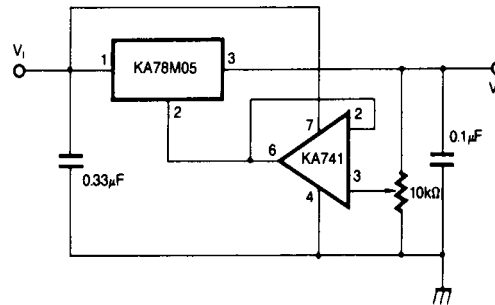



Fig. 5 0.5 to 10V Regulator

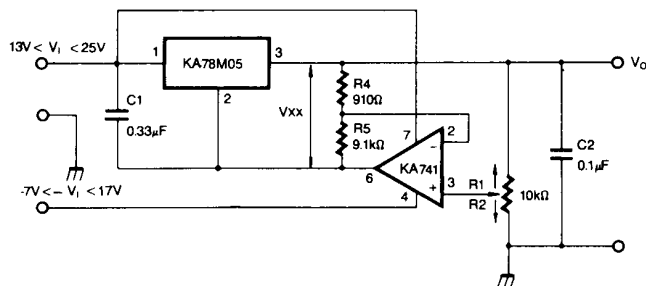

$$V_o = V_{xx} \frac{R_4}{R_1}$$

# TO-220

Dimensions in Millimeters

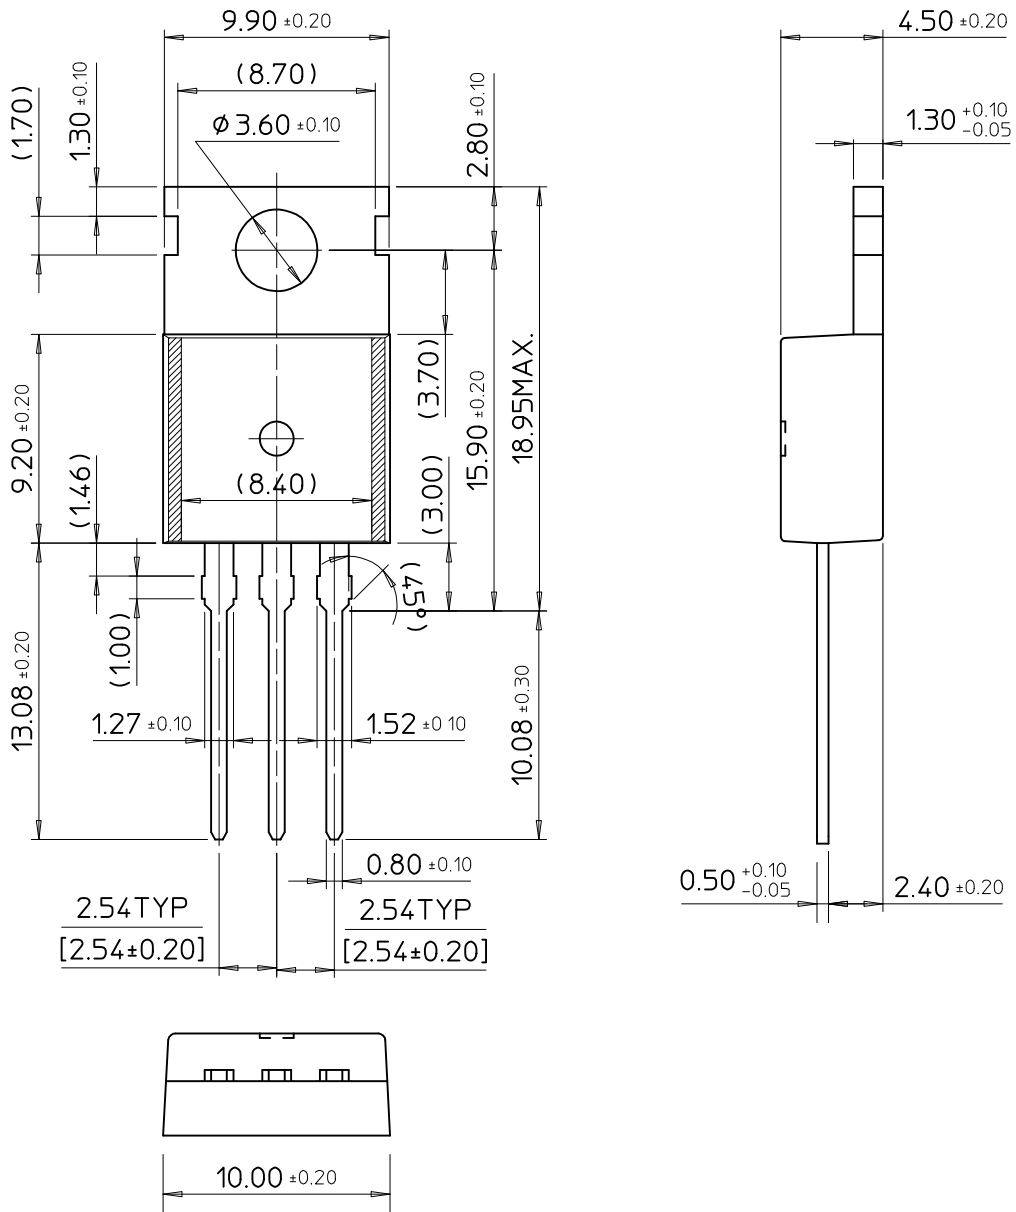

SAMSUNG ELECTRONICS CO.,LTD.