



## LM123/LM323 3 Amp, 5 Volt Positive Regulator

### General Description

The LM123 is a three-terminal positive regulator with a preset 5V output and a load driving capability of 3 amps. New circuit design and processing techniques are used to provide the high output current without sacrificing the regulation characteristics of lower current devices.

The 3 amp regulator is virtually blowout proof. Current limiting, power limiting, and thermal shutdown provide the same high level of reliability obtained with these techniques in the LM109 1 amp regulator.

No external components are required for operation of the LM123. If the device is more than 4 inches from the filter capacitor, however, a 1  $\mu$ F solid tantalum capacitor should be used on the input. A 0.1  $\mu$ F or larger capacitor may be used on the output to reduce load transient spikes created by fast switching digital logic, or to swamp out stray load capacitance.

An overall worst case specification for the combined effects of input voltage, load currents, ambient temperature, and

power dissipation ensure that the LM123 will perform satisfactorily as a system element.


For applications requiring other voltages, see LM150 series data sheet.

Operation is guaranteed over the junction temperature range  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ . An electrically identical LM323 is specified from  $0^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  junction temperature. A hermetic TO-3 package is used for high reliability and low thermal resistance.

### Features


- 3 amp output current
- Internal current and thermal limiting
- 0.01 $\Omega$  typical output impedance
- 7.5V minimum input voltage
- 30W power dissipation
- 100% electrical burn-in

### Connection Diagram

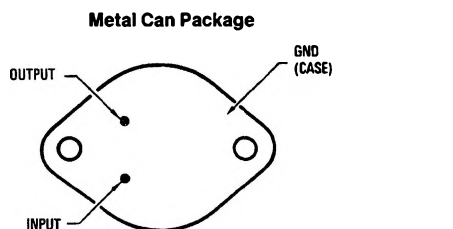

Order Number LM123K STEEL or LM323K STEEL  
See NS Package Number K02A

### Typical Applications

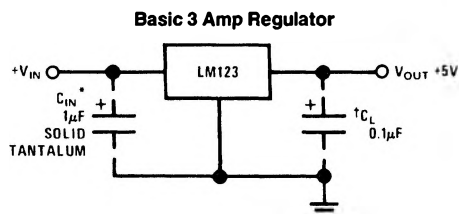

\*Required if LM123 is more than 4" from filter capacitor.

†Regulator is stable with no load capacitor into resistive loads.

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, contact the National Semiconductor Sales Office/Distributors for availability and specifications.

(Note 4)

Input Voltage	20V
Power Dissipation	Internally Limited
Operating Junction Temperature Range	
LM123	-55°C to +150°C
LM323	0°C to +125°C

Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	300°C

## Preconditioning

Burn-In In Thermal Limit	100% All Devices
--------------------------	------------------

## Electrical Characteristics (Note 1)

Parameter	Conditions	LM123			LM323			Units
		Min	Typ	Max	Min	Typ	Max	
Output Voltage	$T_j = 25^\circ\text{C}$ $V_{IN} = 7.5\text{V}, I_{OUT} = 0\text{A}$	4.7	5	5.3	4.8	5	5.2	V
	$7.5\text{V} \leq V_{IN} \leq 15\text{V}$ $0\text{A} \leq I_{OUT} \leq 3\text{A}, P \leq 30\text{W}$	4.6		5.4	4.75		5.25	V
Line Regulation (Note 3)	$T_j = 25^\circ\text{C}$ $7.5\text{V} \leq V_{IN} \leq 15\text{V}$		5	25		5	25	mV
Load Regulation (Note 3)	$T_j = 25^\circ\text{C}, V_{IN} = 7.5\text{V},$ $0\text{A} \leq I_{OUT} \leq 3\text{A}$		25	100		25	100	mV
Quiescent Current	$7.5\text{V} \leq V_{IN} \leq 15\text{V},$ $0\text{A} \leq I_{OUT} \leq 3\text{A}$		12	20		12	20	mA
Output Noise Voltage	$T_j = 25^\circ\text{C}$ $10\text{ Hz} \leq f \leq 100\text{ kHz}$		40			40		$\mu\text{Vrms}$
Short Circuit Current Limit	$T_j = 25^\circ\text{C}$ $V_{IN} = 15\text{V}$		3	4.5		3	4.5	A
	$V_{IN} = 7.5\text{V}$		4	5		4	5	A
Long Term Stability				35			35	mW
Thermal Resistance Junction to Case (Note 2)			2			2		$^\circ\text{C/W}$

**Note 1:** Unless otherwise noted, specifications apply for  $-55^\circ\text{C} \leq T_j \leq +150^\circ\text{C}$  for the LM123 and  $0^\circ\text{C} \leq T_j \leq +125^\circ\text{C}$  for the LM323. Although power dissipation is internally limited, specifications apply only for  $P \leq 30\text{W}$ .


**Note 2:** Without a heat sink, the thermal resistance of the TO-3 package is about  $35^\circ\text{C/W}$ . With a heat sink, the effective thermal resistance can only approach the specified values of  $2^\circ\text{C/W}$ , depending on the efficiency of the heat sink.

**Note 3:** Load and line regulation are specified at constant junction temperature. Pulse testing is required with a pulse width  $\leq 1\text{ ms}$  and a duty cycle  $\leq 5\%$ .

**Note 4:** Refer to RETS123K drawing for military specifications for the LM123K.

## Typical Applications (Continued)

### Adjustable Output 5V–10V 0.1% Regulation

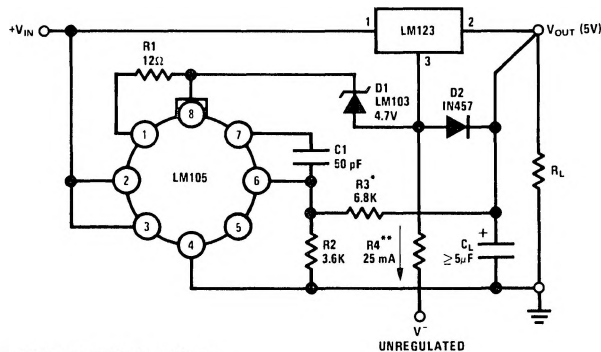


\*Select to Set Output Voltage

\*\*Select to Draw 25 mA from  $V^-$

TL/H/7771-4


# Typical Performance Characteristics

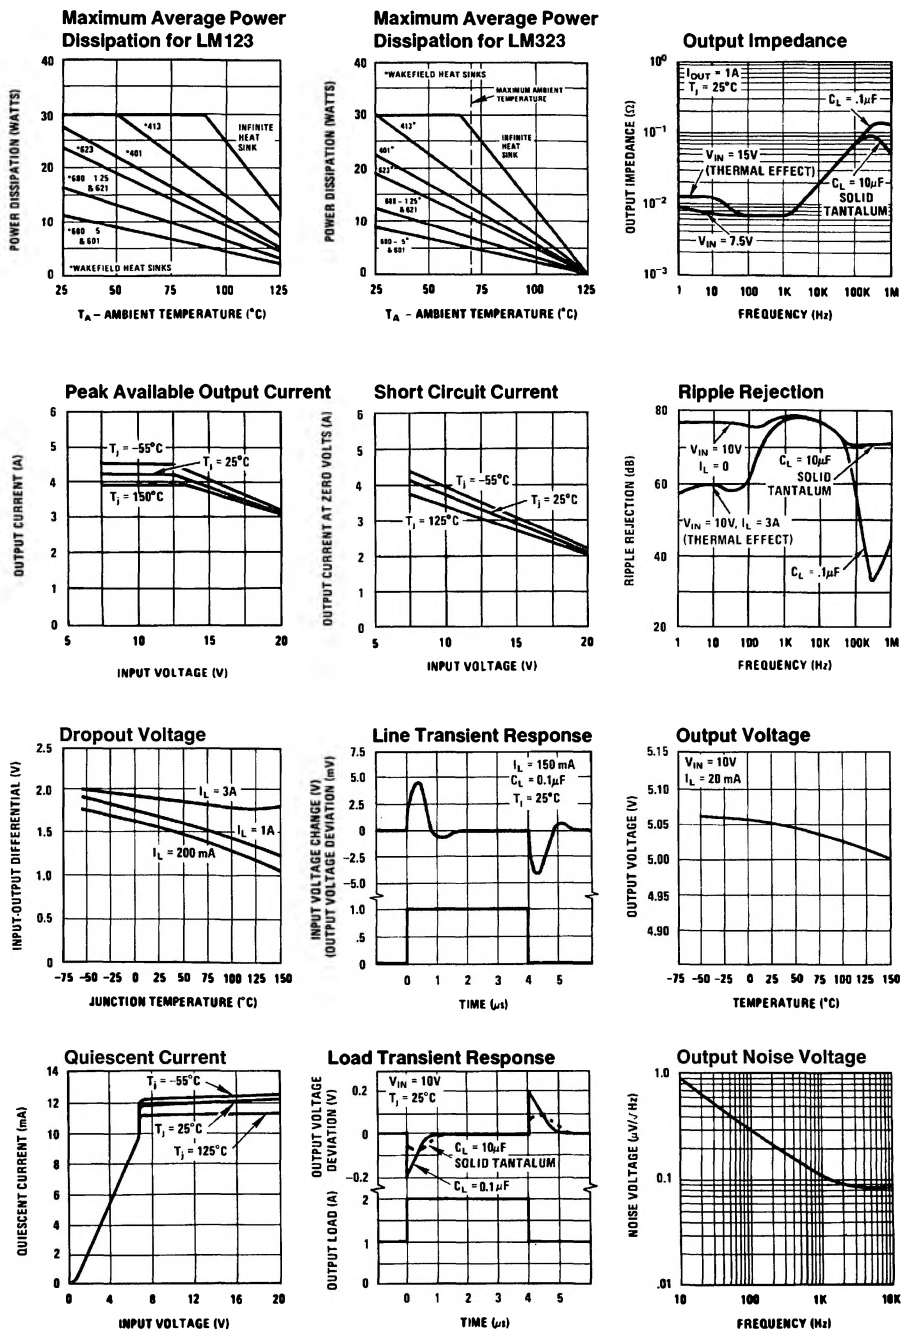

TL/H/7771-5

## Typical Applications (Continued)


### 10 Amp Regulator with Complete Overload Protection

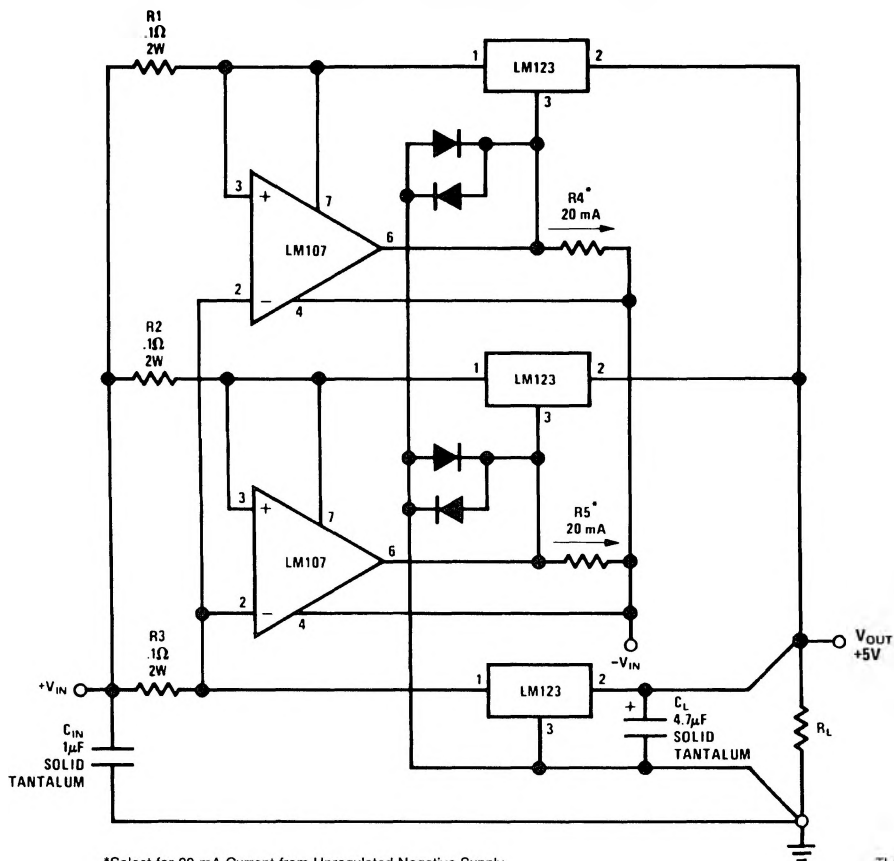

\*Select for 20 mA Current from Unregulated Negative Supply

TL/H/7771-6

### Adjustable Regulator 0V–10V @ 3A

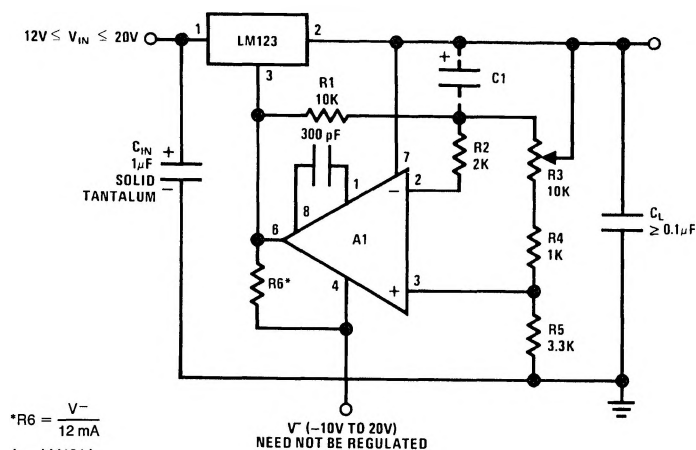
$$*R6 = \frac{V-}{12 \text{ mA}}$$


A<sub>1</sub>—LM101A

**C<sub>1</sub>—2  $\mu$ F Optional—Improves Ripple Rejection, Noise, and Transient Response**

TL/H/7771-7


# Typical Applications (Continued)

## Trimming Output to 5V

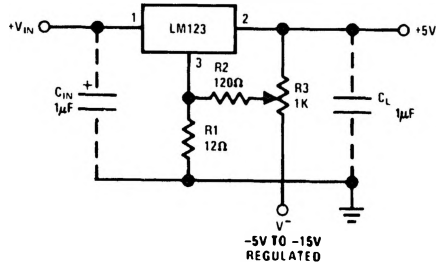

TL/H/7771-8

## Schematic Diagram

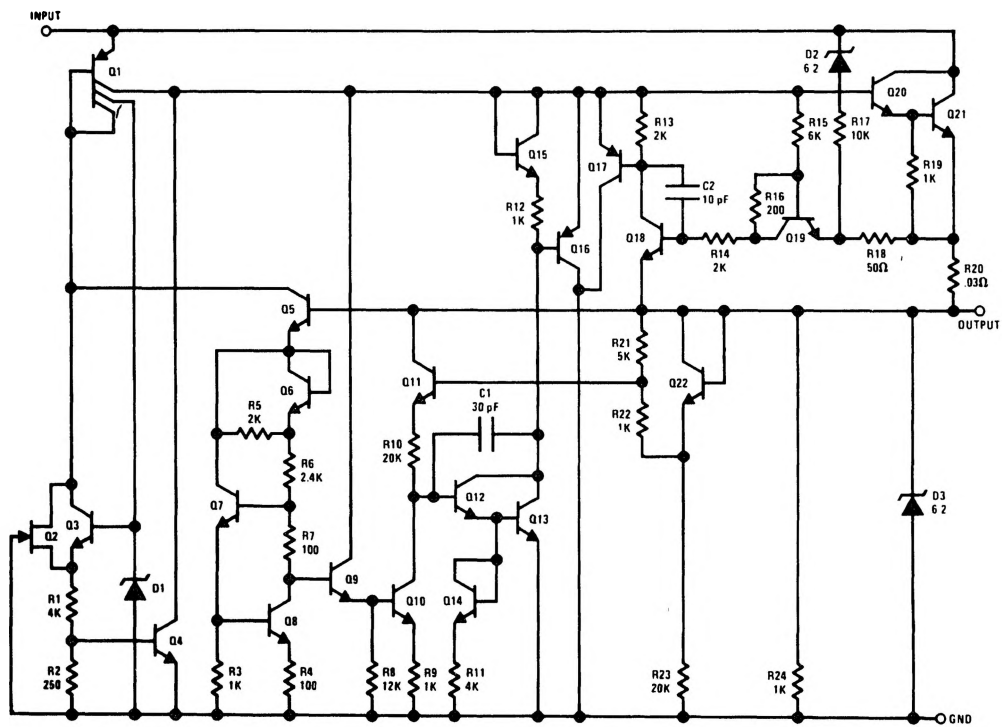

TL/H/7771-1