

## Specification

Nominal Basket Diameter	12", 304.8mm
Nominal Impedance*	8 ohms
Power Rating**	150W
Resonance	79Hz
Usable Frequency Range***	70Hz-5kHz
Sensitivity	99
Magnet Weight	38 oz.
Gap Height	0.312", 7.92mm
Voice Coil Diameter	2", 50.8mm

## Thiele & Small Parameters

Resonant Frequency (fs)	79Hz
DC Resistance (Re)	7.3
Coil Inductance (Le)	0.54mH
Mechanical Q (Qms)	13.88
Electromagnetic Q (Qes)	0.68
Total Q (Qts)	0.65
Compliance Equivalent Volume (Vas)	50.9 liters / 1.8 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	42cc
Mechanical Compliance of Suspension (Cms)	0.13mm/N
BL Product (BL)	12.8 T-M
Diaphragm Mass inc. Airload (Mms)	31 grams
Efficiency Bandwidth Product (EBP)	116
Maximum Linear Excursion (Xmax)	0.8mm
Surface Area of Cone (Sd)	519.5 cm <sup>2</sup>
Maximum Mechanical Limit (Xlim)	

## Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	Acceptable
Overall Diameter	12.02", 305.3mm
Baffle Hole Diameter	10.97", 278.6mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	0.25", 6.4mm
Mounting Holes B.C.D.	11.63", 295.4mm
Depth	5.1", 130mm
Net Weight	8.3 lbs., 3.8 kg
Shipping Weight	10 lbs., 4.5 kg

## Materials of Construction

Copper voice coil  
 Polyimide former  
 Ferrite magnet  
 Non-vented core  
 Pressed steel basket  
 Paper Cone  
 Paper cone edge  
 Zurette dust cap



  
 EMINENCE®  
 The Art and Science of Sound


## TEXAS HEAT™



tex'as heat n. a warm and smooth 12" American guitar speaker packin' a little heat, Texas style

**Coloration:** Nice warm, fat tone with a little top end bite and clarity. Very touch-sensitive with a hint of British flavor

**Genre:** American Rock, Blues, and Southern Rock

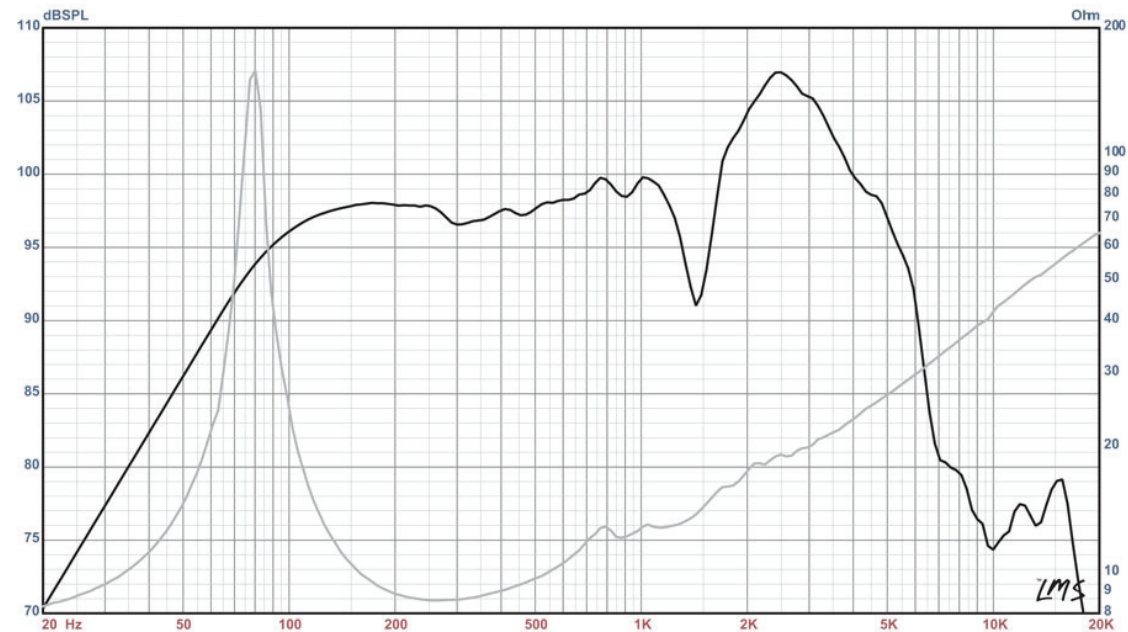

\* Please inquire about alternative impedances.

\*\* Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

\*\*\* The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)