



**FAST RECOVERY RECTIFIER DIODES**


- HIGH VOLTAGE CAPABILITY
- FAST AND SOFT RECOVERY
- THE SPECIFICATIONS AND CURVES ENABLE THE DETERMINATION OF  $t_{rr}$  AND  $I_{RM}$  AT 100°C UNDER USERS CONDITIONS
- INSULATED

**APPLICATIONS**

- MOTOR CONTROLS AND CONVERTERS
- SWITCHMODE POWER SUPPLIES

**DESCRIPTION**

Fast recovery rectifiers suited for applications in combination with superswitch transistors.

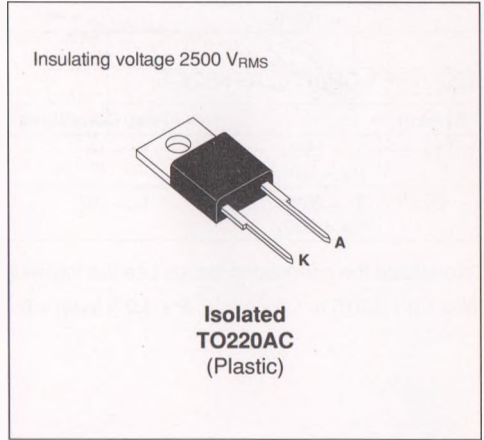

**ABSOLUTE RATINGS (limiting values)**

Symbol	Parameter		Value	Unit
$I_{FRM}$	Repetitive Peak Forward Current	$t_p \leq 20\mu s$	120	A
$I_F (RMS)$	RMS Forward Current		16	A
$I_F (AV)$	Average Forward Current	$T_C = 100^\circ C$ $\delta = 0.5$	10	A
$I_{FSM}$	Surge non Repetitive Forward Current	$t_p = 10ms$ Sinusoidal	120	A
$P_{tot}$	Power Dissipation	$T_C = 100^\circ C$	20	W
$T_{stg}$ $T_J$	Storage and Junction Temperature Range		- 40 to 150	°C

Symbol	Parameter	ESM 765PI-		Unit
		600	800	
$V_{RRM}$	Repetitive Peak Reverse Voltage	600	800	V
$V_{RSM}$	Non Repetitive Peak Reverse Voltage	600	800	V

**THERMAL RESISTANCE**

Symbol	Parameter	Value	Unit
$R_{th (j-c)}$	Junction-case	3.5	°C/W

## ELECTRICAL CHARACTERISTICS

## STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$I_R$	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			20	$\mu\text{A}$
	$T_j = 100^\circ\text{C}$				1	$\text{mA}$
$V_F$	$T_j = 25^\circ\text{C}$	$I_F = 10\text{A}$			1.4	V
	$T_j = 100^\circ\text{C}$				1.35	

## RECOVERY CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ\text{C}$ $V_R = 30\text{V}$	$I_F = 1\text{A}$ $di_F/dt = -15\text{A}/\mu\text{s}$			300	ns
$Q_{rr}$	$T_j = 25^\circ\text{C}$ $V_R = 200\text{V}$	$I_F = 10\text{A}$ $di_F/dt = -50\text{A}/\mu\text{s}$		2.3		$\mu\text{C}$

To evaluate the conduction losses use the following equations :

$$V_F = 1.2 + 0.015 I_F$$

$$P = 1.2 \times I_{F(AV)} + 0.015 I_F^2_{(RMS)}$$

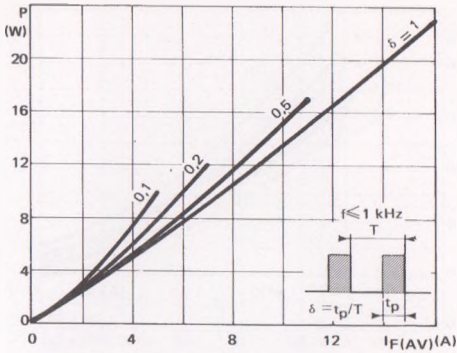


FIGURE 1: Low frequency power losses versus average current

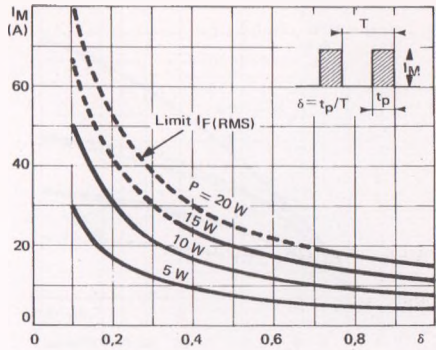


FIGURE 2: Peak current versus form factor

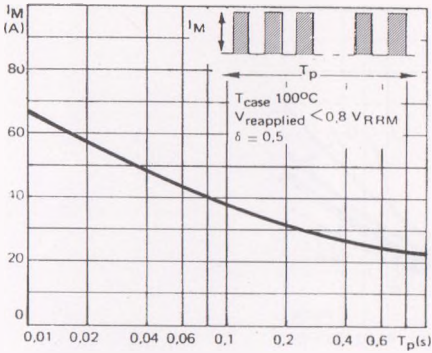


FIGURE 3: Non repetitive peak surge current versus overload duration

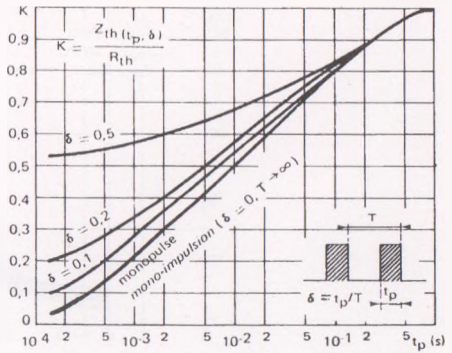


FIGURE 4: Thermal impedance versus pulse width

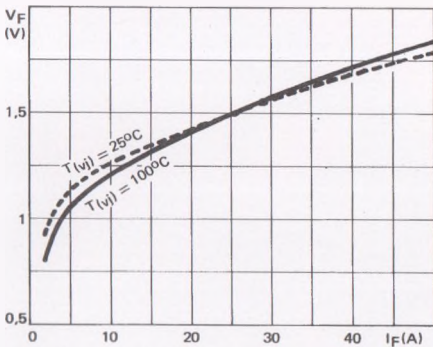


FIGURE 5: Forward voltage drop versus forward current

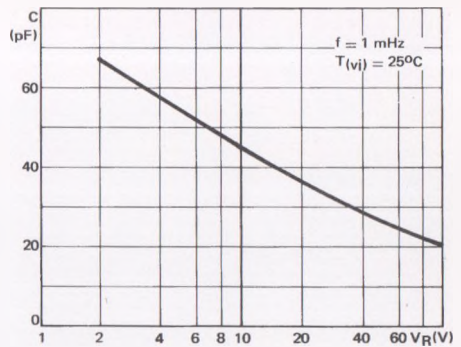


FIGURE 8: Capacitance versus applied reverse voltage

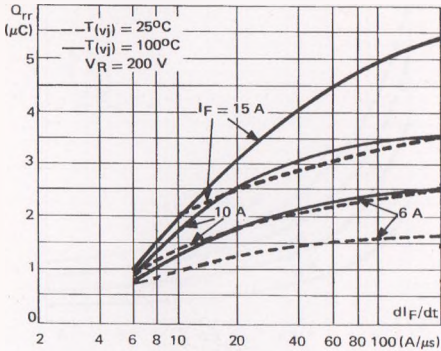


FIGURE 7: Recovery charge versus  $di_F/dt$

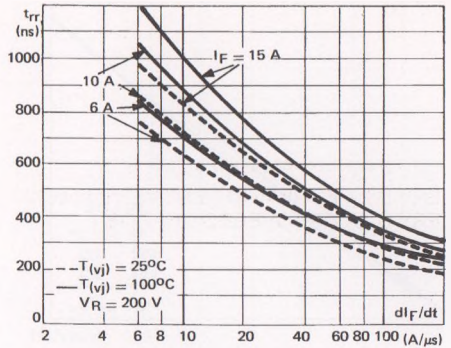


FIGURE 8: Recovery time versus  $di_F/dt$

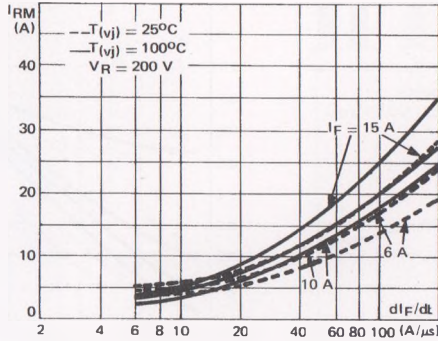


FIGURE 9: Peak reverse current versus  $di_F/dt$