

TOSHIBA Power Transistor Module Silicon NPN&PNP Epitaxial Type (Darlington power transistor 4 in 1)

MP4503


High Power Switching Applications.

Hammer Drive, Pulse Motor Drive and Inductive Load Switching.

- Package with heat sink isolated to lead (SIP 12 pin)
- High collector power dissipation (4 devices operation)
: $P_T = 5 \text{ W}$ ($T_a = 25^\circ\text{C}$)
- High collector current: $I_C (\text{DC}) = \pm 4 \text{ A}$ (max)
- High DC current gain: $hFE = 2000$ (min) ($V_{CE} = \pm 2 \text{ V}$, $I_C = \pm 1 \text{ A}$)


Maximum Ratings ($T_a = 25^\circ\text{C}$)

Characteristics		Symbol	Rating		Unit
			NPN	PNP	
Collector-base voltage		V_{CBO}	100	-100	V
Collector-emitter voltage		V_{CEO}	80	-80	V
Emitter-base voltage		V_{EBO}	5	-5	V
Collector current	DC	I_C	4	-4	A
	Pulse	I_{CP}	6	-6	
Continuous base current		I_B	0.4	-0.4	A
Collector power dissipation (1 device operation)		P_C	3.0		W
Collector power dissipation (4 devices operation)	$T_a = 25^\circ\text{C}$	P_T	5.0		W
	$T_c = 25^\circ\text{C}$		25		
Isolation voltage		V_{Isol}	1000		V
Junction temperature		T_j	150		°C
Storage temperature range		T_{stg}	-55 to 150		°C

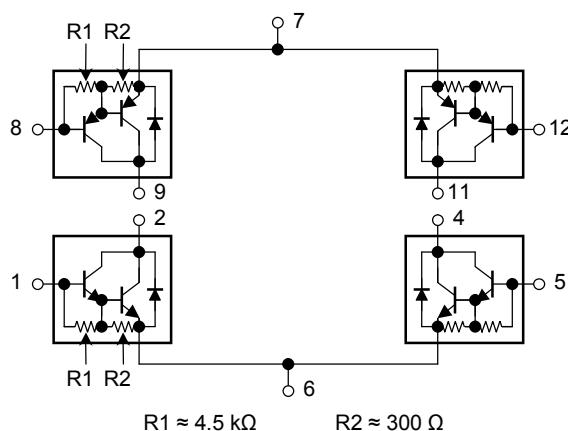Array Configuration

Industrial Applications

Unit: mm

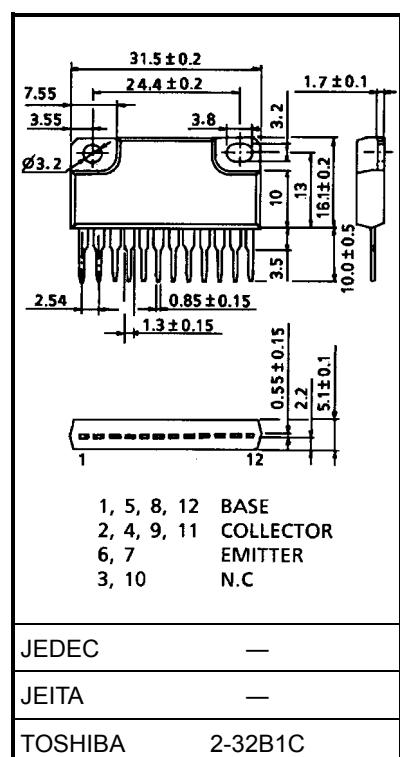


Weight: 6.0 g (typ.)

Thermal Characteristics

Characteristics	Symbol	Max	Unit
Thermal resistance of junction to ambient (4 devices operation, $T_a = 25^\circ\text{C}$)	$\Sigma R_{th} (\text{j-a})$	25	$^\circ\text{C/W}$
Thermal resistance of junction to case (4 devices operation, $T_c = 25^\circ\text{C}$)	$\Sigma R_{th} (\text{j-c})$	5.0	$^\circ\text{C/W}$
Maximum lead temperature for soldering purposes (3.2 mm from case for 10 s)	T_L	260	$^\circ\text{C}$

Electrical Characteristics ($T_a = 25^\circ\text{C}$) (NPN transistor)

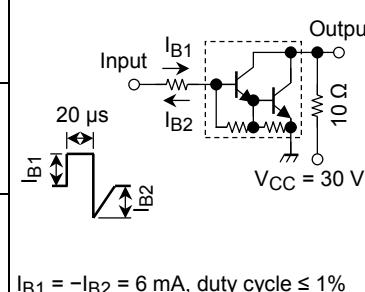Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	I_{CBO}	$V_{CB} = 100 \text{ V}, I_E = 0 \text{ A}$	—	—	20	μA
Collector cut-off current	I_{CEO}	$V_{CE} = 80 \text{ V}, I_B = 0 \text{ A}$	—	—	20	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5 \text{ V}, I_C = 0 \text{ A}$	0.5	—	2.5	mA
Collector-base breakdown voltage	$V_{(\text{BR}) \text{ CBO}}$	$I_C = 1 \text{ mA}, I_E = 0 \text{ A}$	100	—	—	V
Collector-emitter breakdown voltage	$V_{(\text{BR}) \text{ CEO}}$	$I_C = 10 \text{ mA}, I_B = 0 \text{ A}$	80	—	—	V
DC current gain	$h_{FE} (1)$	$V_{CE} = 2 \text{ V}, I_C = 1 \text{ A}$	2000	—	—	—
	$h_{FE} (2)$	$V_{CE} = 2 \text{ V}, I_C = 3 \text{ A}$	1000	—	—	
Saturation voltage	Collector-emitter	$V_{CE} (\text{sat})$	$I_C = 3 \text{ A}, I_B = 6 \text{ mA}$	—	—	1.5
	Base-emitter	$V_{BE} (\text{sat})$	$I_C = 3 \text{ A}, I_B = 6 \text{ mA}$	—	—	2.0
Transition frequency	f_T	$V_{CE} = 2 \text{ V}, I_C = 0.5 \text{ A}$	—	60	—	MHz
Collector output capacitance	C_{ob}	$V_{CB} = 10 \text{ V}, I_E = 0 \text{ A}, f = 1 \text{ MHz}$	—	30	—	pF
Switching time	Turn-on time	t_{on}		—	0.2	—
	Storage time	t_{stg}		—	1.5	—
	Fall time	t_f		—	0.6	—

Emitter-Collector Diode Ratings and Characteristics ($T_a = 25^\circ\text{C}$)







Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Forward current	I_{FM}	—	—	—	4	A
Surge current	I_{FSM}	$t = 1 \text{ s}, 1 \text{ shot}$	—	—	6	A
Forward voltage	V_F	$I_F = 1 \text{ A}, I_B = 0 \text{ A}$	—	—	2.0	V
Reverse recovery time	t_{rr}	$I_F = 4 \text{ A}, V_{BE} = -3 \text{ V}, dI_F/dt = -50 \text{ A}/\mu\text{s}$	—	1.0	—	μs
Reverse recovery charge	Q_{rr}		—	8	—	μC







Electrical Characteristics ($T_a = 25^\circ\text{C}$) (PNP transistor)






Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	I_{CBO}	$V_{CB} = -100 \text{ V}, I_E = 0 \text{ A}$	—	—	-20	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -80 \text{ V}, I_B = 0 \text{ A}$	—	—	-20	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5 \text{ V}, I_C = 0 \text{ A}$	-0.5	—	-2.5	mA
Collector-base breakdown voltage	$V_{(\text{BR})\text{CBO}}$	$I_C = -1 \text{ mA}, I_E = 0 \text{ A}$	-100	—	—	V
Collector-emitter breakdown voltage	$V_{(\text{BR})\text{CEO}}$	$I_C = -10 \text{ mA}, I_B = 0 \text{ A}$	-80	—	—	V
DC current gain	h_{FE} (1)	$V_{CE} = -2 \text{ V}, I_C = -1 \text{ A}$	2000	—	—	—
	h_{FE} (2)	$V_{CE} = -2 \text{ V}, I_C = -3 \text{ A}$	1000	—	—	
Saturation voltage	Collector-emitter	$V_{CE} (\text{sat})$	$I_C = -3 \text{ A}, I_B = -6 \text{ mA}$	—	—	-1.5
	Base-emitter	$V_{BE} (\text{sat})$	$I_C = -3 \text{ A}, I_B = -6 \text{ mA}$	—	—	-2.0
Transition frequency	f_T	$V_{CE} = -2 \text{ V}, I_C = -0.5 \text{ A}$	—	40	—	MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10 \text{ V}, I_E = 0 \text{ A}, f = 1 \text{ MHz}$	—	55	—	pF
Switching time	Turn-on time	t_{on}	 $t_{on} = 0.15 \mu\text{s}$ $t_{stg} = 0.80 \mu\text{s}$ $t_f = 0.40 \mu\text{s}$ $-I_{B1} = I_{B2} = 6 \text{ mA}$, duty cycle $\leq 1\%$	—	0.15	—
	Storage time	t_{stg}		—	0.80	—
	Fall time	t_f		—	0.40	—



Emitter-Collector Diode Ratings and Characteristics ($T_a = 25^\circ\text{C}$)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Forward current	I_{FM}	—	—	—	4	A
Surge current	I_{FSM}	$t = 1 \text{ s}, 1 \text{ shot}$	—	—	6	A
Forward voltage	V_F	$I_F = 1 \text{ A}, I_B = 0 \text{ A}$	—	—	2.0	V
Reverse recovery time	t_{rr}	$I_F = 4 \text{ A}, V_{BE} = 3 \text{ V}, dI_F/dt = -50 \text{ A}/\mu\text{s}$	—	1.0	—	μs
Reverse recovery charge	Q_{rr}		—	8	—	μC

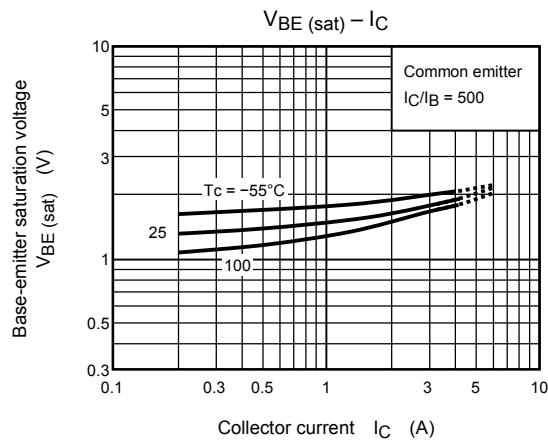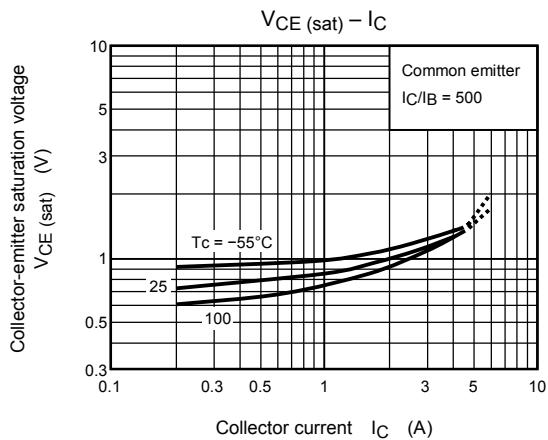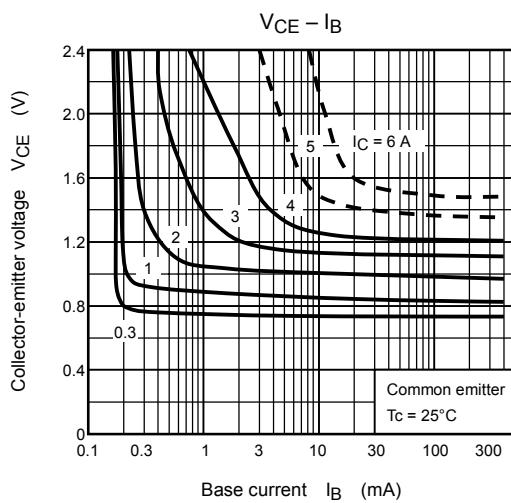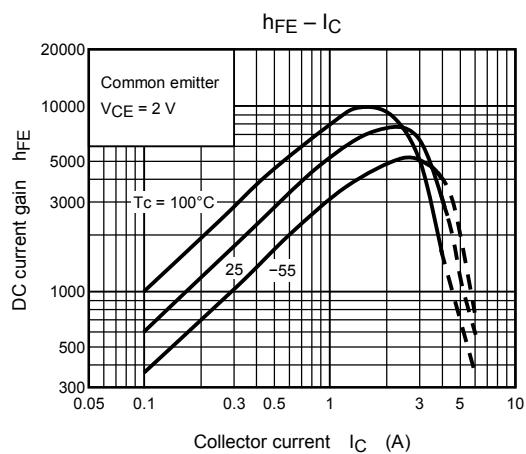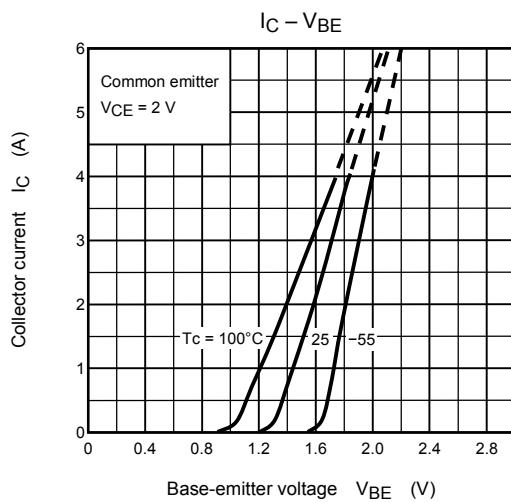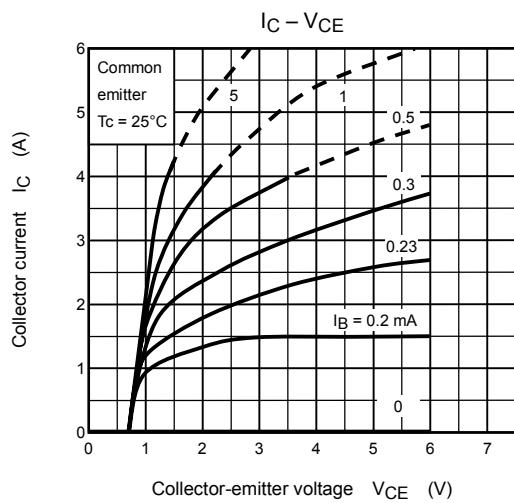

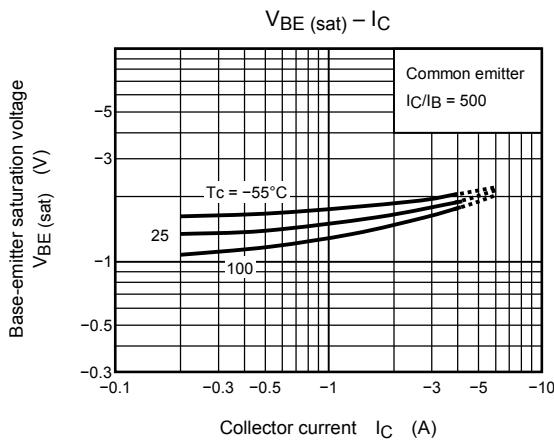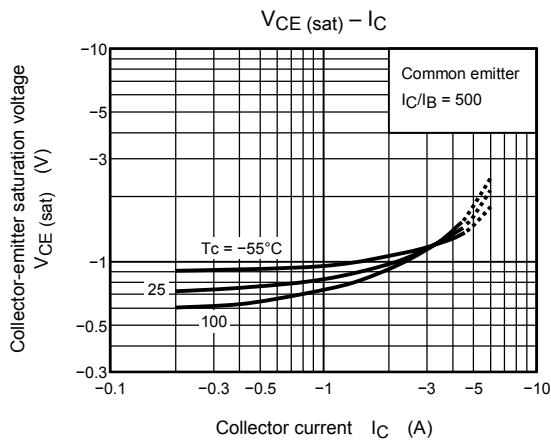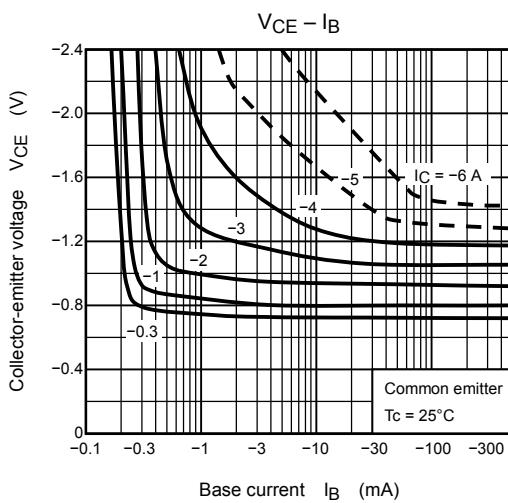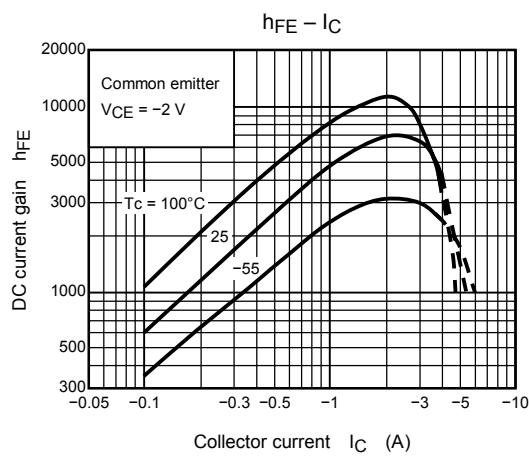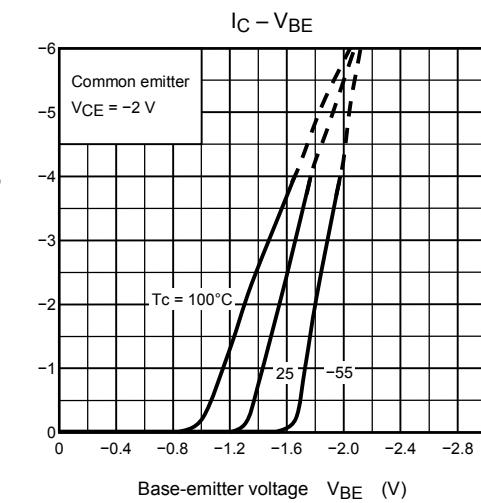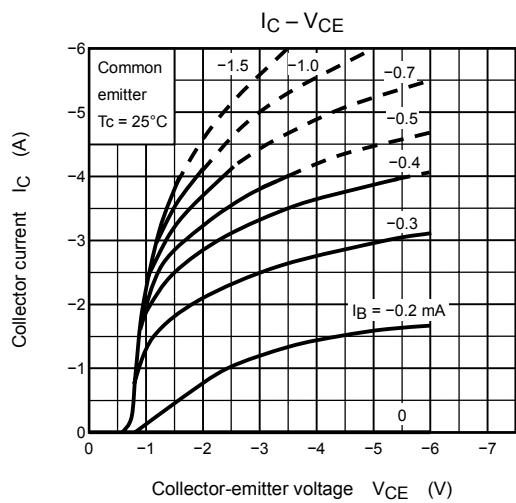

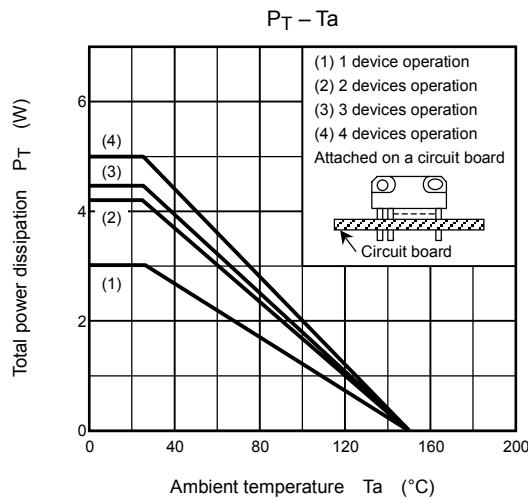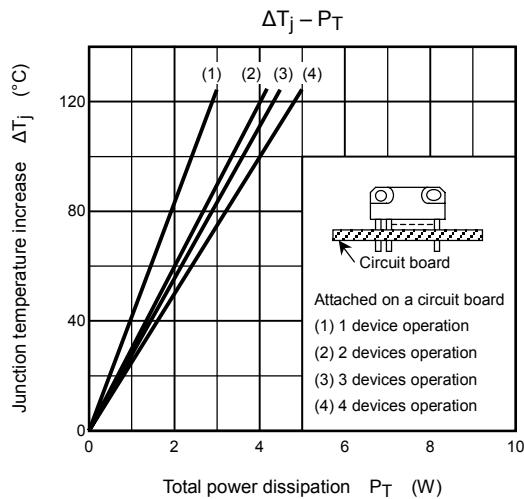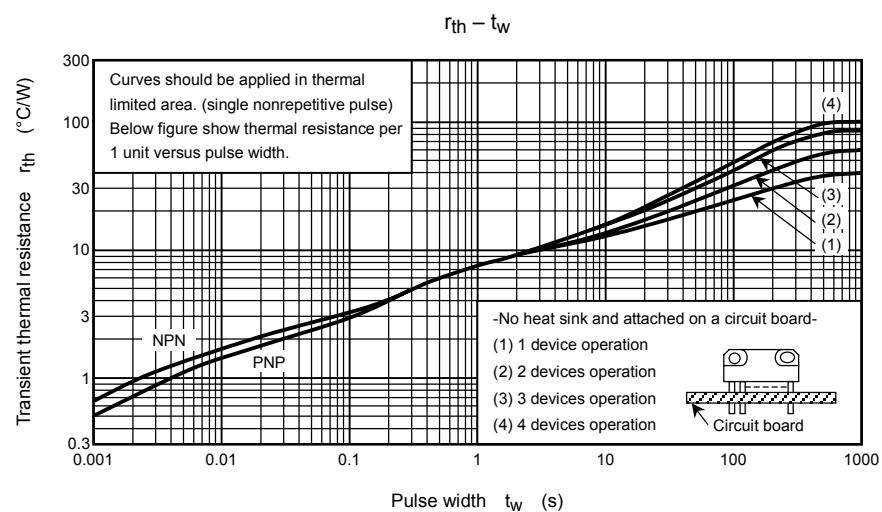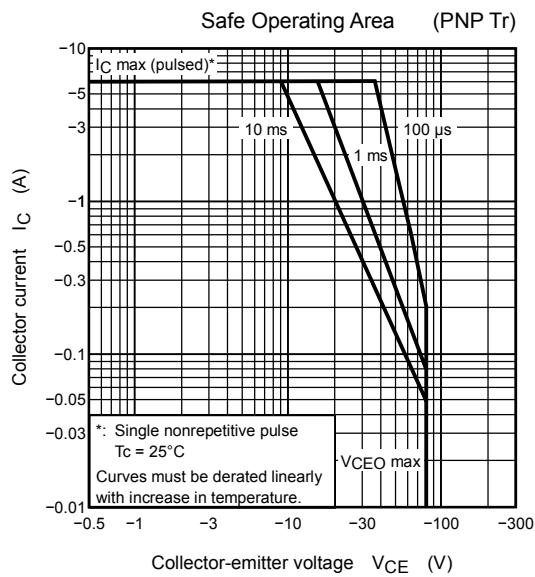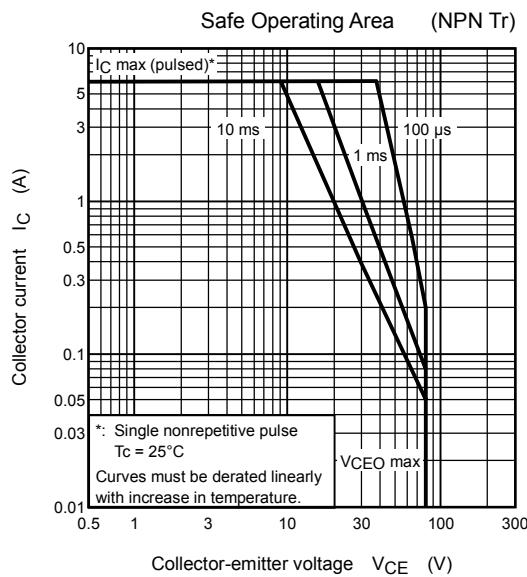

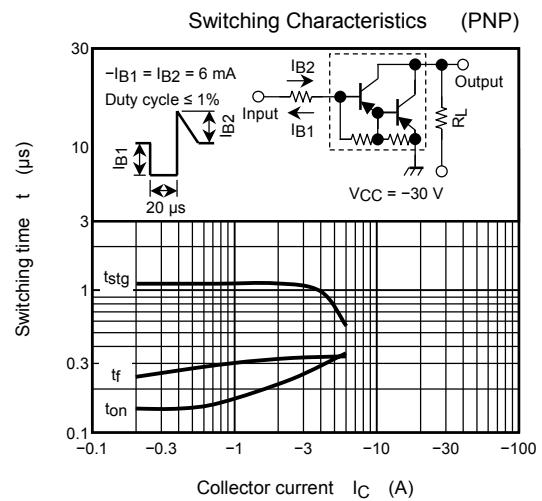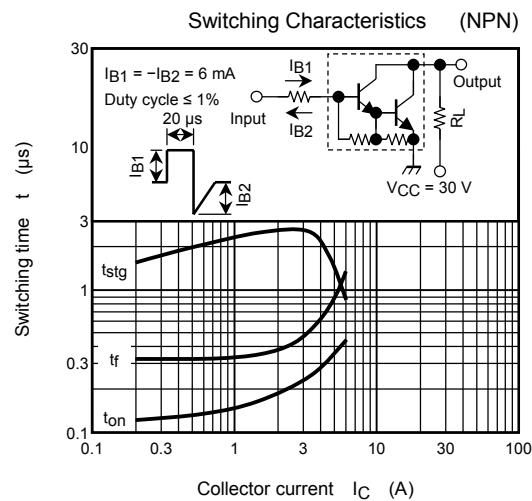

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.