

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

1N4614 THRU 1N4627
250 mW LOW NOISE ZENER DIODE
1.8 VOLTS THRU 6.2 VOLTS
5% TOLERANCE

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

DESCRIPTION

JEDEC DO-35 CASE

1N4614 Series Silicon Zener Diode is a high quality voltage regulator designed for low leakage, low current and low noise applications. Higher voltage devices are available in the 1N4099 series.

ABSOLUTE MAXIMUM RATINGS

Power Dissipation (@ $T_A = 25^\circ\text{C}$)
Operating and Storage Temperature
Tolerance (No Suffix)
Tolerance "C Suffix"
Tolerance "D Suffix"

SYMBOL

P_D 250
 T_J, T_{STG} -65 to +200
 ± 5
 ± 2
 ± 1


UNIT

mW
 $^\circ\text{C}$
%
%
%

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, $V_F = 1.0\text{V MAX @ } I_F = 200\text{ mA}$.)

TYPE	Zener Voltage	Test Current	Maximum Zener Impedance	Maximum Reverse Leakage Current		Maximum Zener Current I_{ZM}	Maximum Noise Density
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$			$N_D @ I_{ZT} = 250\mu\text{A}$
	Volts	μA	Ω	μA	Volts		$\mu\text{V}/\sqrt{\text{Hz}}$
1N4614	1.8	250	1200	7.5	1.0	120	1.0
1N4615	2.0	250	1250	5.0	1.0	110	1.0
1N4616	2.2	250	1300	4.0	1.0	100	1.0
1N4617	2.4	250	1400	2.0	1.0	95	1.0
1N4618	2.7	250	1500	1.0	1.0	90	1.0
1N4619	3.0	250	1600	0.8	1.0	85	1.0
1N4620	3.3	250	1650	7.5	1.5	80	1.0
1N4621	3.6	250	1700	7.5	2.0	75	1.0
1N4622	3.9	250	1650	5.0	2.0	70	1.0
1N4623	4.3	250	1600	4.0	2.0	65	1.0
1N4624	4.7	250	1550	10	3.0	60	1.0
1N4625	5.1	250	1500	10	3.0	55	2.0
1N4626	5.6	250	1400	10	4.0	50	4.0
1N4627	6.2	250	1200	10	5.0	45	5.0

R2

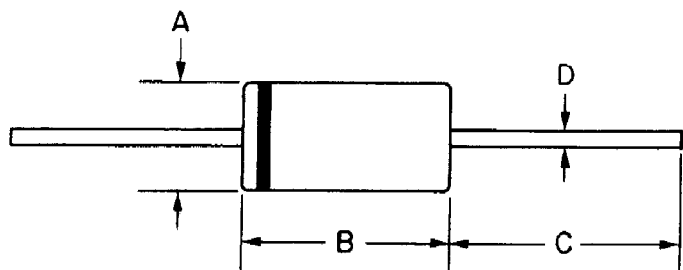

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.060	.080	1.52	2.03
B	.140	.160	3.60	4.10
C	1.0	—	25.4	—
D	.018	.022	0.46	0.56

HERMETICALLY SEALED GLASS CASE WITH TINNED COPPER LEADS



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that data sheets are current before placing orders.