


## Features

- IEEE 802.11b-compliant Wireless Standard
- Wireless LAN MAC Unit with ARM7TDMI™ RISC Processor
- Integrated 128-byte Transmit and 128-byte Receive FIFOs, for Wireless MAC Layer Functions
- Delivers Standard Wireless Networking to Any Host that Supports a Full-speed (12 Mbps) USB Interface
- Glueless SRAM Interface for All MAC Operations, Supporting up to 1M Byte of External Memory
- Integrated 6K x 32-bit Internal SRAM, Used for Fast Program Code Execution and Temporary Storage of Data
- Glueless Flash Memory Interface, Supporting up to 1M Bytes of Nonvolatile Memory for Permanent Storage of Program Code
- Wired Equivalent Privacy (WEP) in Hardware Supporting 64-bit and 128-bit Encryption
- The Integrated Physical Attachment Interface (PAI) Fully Supports Direct-sequence Spread Spectrum and Frequency-hopping Spread Spectrum Physical-layer Interfaces
- The WLAN and Inter-networking Functions can be Changed and Updated Easily to New Requirements Since They are Implemented in Micro Code
- Supports 11 Mbps Data Rate with Automatic Fallback to 5.5, 2 and 1 Mbps
- 128-lead, 14 x 14 mm TQFP Package
- Low-voltage Operation (3.3V)
- Internal ROM Contains Hardwired USB Control Software for Automatic Configuration when Card is Inserted in the USB Slot
- Device Firmware Upgrade is also Included in the Internal ROM for Downloading Firmware into Internal SRAM
- Offers SPI Interface and Five GPIO Pins
- AT76C503A Offers the Option to Download the Whole Code from SPI Flash

## Block Diagram

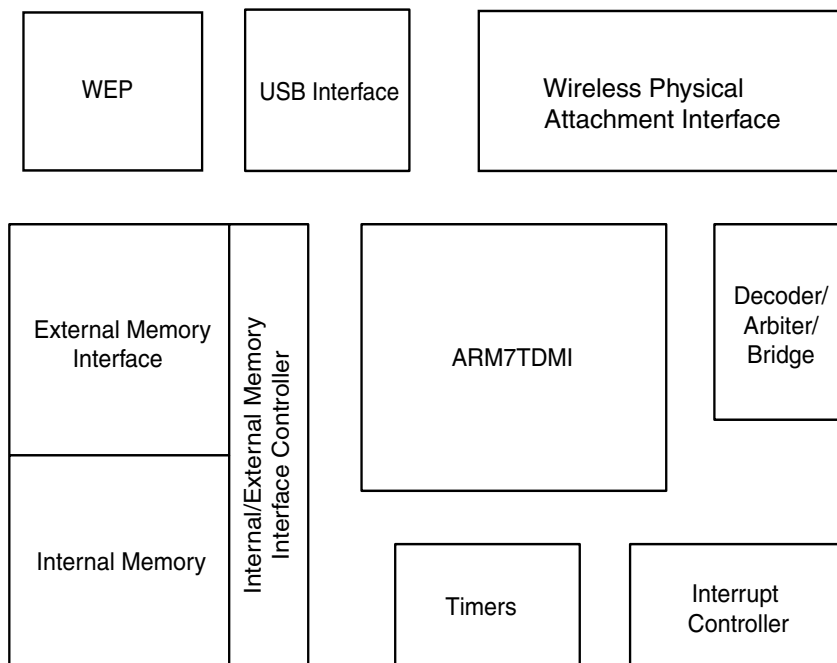

## Universal Serial Bus 11-megabit WLAN Media Access Controller

### AT76C503A

## Summary

Rev. 1949CS-WLAN-06/02



Note: This is a summary document. A complete document is available under NDA. For more information, please contact your local Atmel sales office.



## Description

AT76C503A is a single-chip controller that provides all processing and functionality needed for the MAC protocol of wireless LANs (focusing on, but not limited to the IEEE 802.11b standard). AT76C503A provides a glueless interface conforming to 12-Mbit Universal Serial Bus (USB) specification and can control a variety of wireless physical interfaces.

The AT76C503A chip contains a USB interface, a MAC control unit, and a PAI. The PAI supports 5.5- and 11-Mbit WLAN physical interfaces and the IEEE 802.11 (1 or 2 Mbps) direct-sequence spread spectrum and frequency-hopping spread spectrum physical interfaces, providing flexibility to end users.

The ARM7TDMI core supports two alternative instruction sets. Powerful 32-bit code can be executed by the processor in ARM® operating mode; however, a 16-bit instruction subset is also available in Thumb® mode. Thumb mode can be selected to exploit full processor power with limited external memory resources. Note that ARM7TDMI operating mode can be changed at run time with negligible overhead.



## Atmel Headquarters

### *Corporate Headquarters*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 487-2600

### *Europe*

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
TEL (41) 26-426-5555  
FAX (41) 26-426-5500

### *Asia*

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
TEL (852) 2721-9778  
FAX (852) 2722-1369

### *Japan*

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
TEL (81) 3-3523-3551  
FAX (81) 3-3523-7581

## Atmel Operations

### *Memory*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

### *Microcontrollers*

2325 Orchard Parkway  
San Jose, CA 95131  
TEL 1(408) 441-0311  
FAX 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
TEL (33) 2-40-18-18-18  
FAX (33) 2-40-18-19-60

### *ASIC/ASSP/Smart Cards*

Zone Industrielle  
13106 Rousset Cedex, France  
TEL (33) 4-42-53-60-00  
FAX (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
TEL (44) 1355-803-000  
FAX (44) 1355-242-743

### *RF/Automotive*

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
TEL (49) 71-31-67-0  
FAX (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906  
TEL 1(719) 576-3300  
FAX 1(719) 540-1759

### *Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom*

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
TEL (33) 4-76-58-30-00  
FAX (33) 4-76-58-34-80

---

### *e-mail*

[literature@atmel.com](mailto:literature@atmel.com)

### *Web Site*

<http://www.atmel.com>

## © Atmel Corporation 2002.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

ATMEL® and DataFlash® are the registered trademark of Atmel.

ARM7TDMI®, ARM®, and Thumb® are the registered trademarks of ARM, Ltd. AMBA™ is the trademark of ARM, Ltd.

Microsoft®, Windows® 98/CE and Windows NT® are the registered trademarks of Microsoft Corporation; Sun-Solaris™ is trademark of Sun Corporation. Other terms and product names may be the trademarks of others.



Printed on recycled paper.