



# 3.3V CMOS QUADRUPLE 2-INPUT POSITIVE-AND GATE

**IDT74ALVC08**

## FEATURES:

- 0.5 MICRON CMOS Technology
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- $V_{CC} = 3.3V \pm 0.3V$ , Normal Range
- $V_{CC} = 2.7V$  to  $3.6V$ , Extended Range
- $V_{CC} = 2.5V \pm 0.2V$
- CMOS power levels ( $0.4\mu W$  typ. static)
- Rail-to-Rail output swing for increased noise margin
- Available in SOIC, SSOP and TSSOP packages

### Drive Features for ALVC08:

- High Output Drivers:  $\pm 24mA$
- Suitable for heavy loads

## DESCRIPTION:


This quadruple 2-input positive-AND gate is built using advanced dual metal CMOS technology. The ALVC08 performs the Boolean function  $Y = A \cdot B$  or  $Y = \overline{A + B}$  in positive logic.

The ALVC08 has been designed with a  $\pm 24mA$  output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.


## APPLICATIONS:

- 3.3V High Speed Systems
- 3.3V and lower voltage computing systems

## FUNCTIONAL BLOCK DIAGRAM

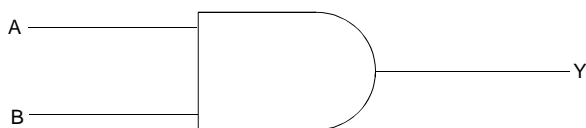

## PIN CONFIGURATION

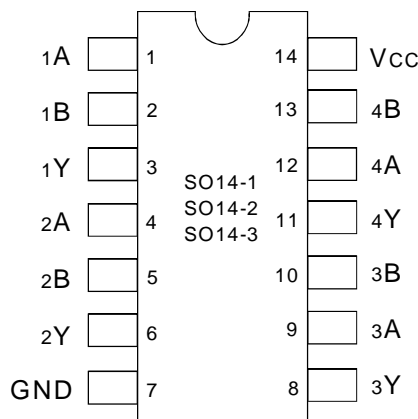

SOIC/ SSOP/ TSSOP  
TOP VIEW

## PIN DESCRIPTION

| Pin Names | Description  |
|-----------|--------------|
| xA, xB    | Data Inputs  |
| xY        | Data Outputs |

## FUNCTION TABLE (each gate)<sup>(1)</sup>

| Inputs |    | Output |
|--------|----|--------|
| xA     | xB | xY     |
| H      | H  | H      |
| L      | X  | L      |
| X      | L  | L      |

### NOTE:

1. H = HIGH Voltage Level  
L = LOW Voltage Level  
X = Don't Care

**ABSOLUTE MAXIMUM RATINGS (1)**

| Symbol                | Description  | Max.                           | Unit |
|-----------------------|--|--------------------------------|------|
| V <sub>TERM</sub> (2) | Terminal Voltage with Respect to GND   | - 0.5 to + 4.6                 | V    |
| V <sub>TERM</sub> (3) | Terminal Voltage with Respect to GND   | - 0.5 to V <sub>CC</sub> + 0.5 | V    |
| T <sub>STG</sub>      | Storage Temperature  | - 65 to + 150                  | °C   |
| I <sub>OUT</sub>      | DC Output Current  | - 50 to + 50                   | mA   |
| I <sub>IK</sub>       | Continuous Clamp Current, V <sub>i</sub> < 0 or V <sub>i</sub> > V <sub>CC</sub> | ± 50                           | mA   |
| I <sub>OK</sub>       | Continuous Clamp Current, V <sub>o</sub> < 0                                     | - 50                           | mA   |
| I <sub>CC</sub>       | Continuous Current through each  | ±100                           | mA   |
| I <sub>SS</sub>       | V <sub>CC</sub> or GND   |                                |      |

ALVC QUAD Link

**NOTES:**

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V<sub>CC</sub> terminals.
3. All terminals except V<sub>CC</sub>.

**CAPACITANCE (TA = +25°C, f = 1.0MHz)**

| Symbol           | Parameter(1)         | Conditions            | Typ. | Max. | Unit |
|------------------|----------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance    | V <sub>IN</sub> = 0V  | 5    | 7    | pF   |
| C <sub>OUT</sub> | Output Capacitance   | V <sub>OUT</sub> = 0V | 7    | 9    | pF   |
| C <sub>I/O</sub> | I/O Port Capacitance | V <sub>IN</sub> = 0V  | 7    | 9    | pF   |

ALVC QUAD Link

**NOTE:**

1. As applicable to the device type.

**DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE**

Following Conditions Apply Unless Otherwise Specified:

Operating Condition: TA = -40°C to +85°C

| Symbol           | Parameter                                | Test Conditions   |                                  | Min. | Typ.(1) | Max.  | Unit |
|------------------|--|---|----------------------------------|------|---------|-------|------|
| V <sub>IH</sub>  | Input HIGH Voltage Level                 | V <sub>CC</sub> = 2.3V to 2.7V  |                                  | 1.7  | —       | —     | V    |
|                  |  | V <sub>CC</sub> = 2.7V to 3.6V  |                                  | 2    | —       | —     |      |
| V <sub>IL</sub>  | Input LOW Voltage Level                  | V <sub>CC</sub> = 2.3V to 2.7V  |                                  | —    | —       | 0.7   | V    |
|                  |  | V <sub>CC</sub> = 2.7V to 3.6V  |                                  | —    | —       | 0.8   |      |
| I <sub>IH</sub>  | Input HIGH Current                       | V <sub>CC</sub> = 3.6V  | V <sub>i</sub> = V <sub>CC</sub> | —    | —       | ± 5   | μA   |
| I <sub>IL</sub>  | Input LOW Current                        | V <sub>CC</sub> = 3.6V  | V <sub>i</sub> = GND             | —    | —       | ± 5   | μA   |
| V <sub>IK</sub>  | Clamp Diode Voltage                      | V <sub>CC</sub> = 2.3V, I <sub>IN</sub> = - 18mA                            |                                  | —    | - 0.7   | - 1.2 | V    |
| V <sub>H</sub>   | Input Hysteresis                         | V <sub>CC</sub> = 3.3V  |                                  | —    | 100     | —     | mV   |
| I <sub>CC</sub>  | Quiescent Power Supply Current           | V <sub>CC</sub> = 3.6V  |                                  | —    | 0.1     | 10    | μA   |
| I <sub>CC</sub>  |  | V <sub>IN</sub> = GND or V <sub>CC</sub>                                    |                                  |      |         |       |      |
| ΔI <sub>CC</sub> | Quiescent Power Supply Current Variation | One input at V <sub>CC</sub> - 0.6V, other inputs at V <sub>CC</sub> or GND |                                  | —    | —       | 750   | μA   |

ALVC QUAD Link

**NOTE:**

1. Typical values are at V<sub>CC</sub> = 3.3V, +25°C ambient.

## OUTPUT DRIVE CHARACTERISTICS

| Symbol | Parameter           | Test Conditions <sup>(1)</sup> |                           | Min.                  | Max. | Unit |
|--------|---------------------|--------------------------------|---------------------------|-----------------------|------|------|
| VOH    | Output HIGH Voltage | V <sub>CC</sub> = 2.3V to 3.6V | I <sub>OH</sub> = - 0.1mA | V <sub>CC</sub> - 0.2 | —    | V    |
|        |                     | V <sub>CC</sub> = 2.3V         | I <sub>OH</sub> = - 6mA   | 2                     | —    |      |
|        |                     | V <sub>CC</sub> = 2.3V         | I <sub>OH</sub> = - 12mA  | 1.7                   | —    |      |
|        |                     | V <sub>CC</sub> = 2.7V         |                           | 2.2                   | —    |      |
|        |                     | V <sub>CC</sub> = 3.0V         |                           | 2.4                   | —    |      |
|        |                     | V <sub>CC</sub> = 3.0V         | I <sub>OH</sub> = - 24mA  | 2                     | —    |      |
| VOL    | Output LOW Voltage  | V <sub>CC</sub> = 2.3V to 3.6V | I <sub>OL</sub> = 0.1mA   | —                     | 0.2  | V    |
|        |                     | V <sub>CC</sub> = 2.3V         | I <sub>OL</sub> = 6mA     | —                     | 0.4  |      |
|        |                     |                                | I <sub>OL</sub> = 12mA    | —                     | 0.7  |      |
|        |                     | V <sub>CC</sub> = 2.7V         | I <sub>OL</sub> = 12mA    | —                     | 0.4  |      |
|        |                     | V <sub>CC</sub> = 3.0V         | I <sub>OL</sub> = 24mA    | —                     | 0.55 |      |

ALVC QUAD Link

**NOTE:**

1. V<sub>IH</sub> and V<sub>IL</sub> must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V<sub>CC</sub> range. T<sub>A</sub> = - 40°C to + 85°C.

## OPERATING CHARACTERISTICS, T<sub>A</sub> = 25°C

| Symbol | Parameter                              | Test Conditions                 | V <sub>CC</sub> = 2.5V ± 0.2V | V <sub>CC</sub> = 3.3V ± 0.3V | Unit |
|--------|--|---------------------------------|-------------------------------|-------------------------------|------|
|        |  |                                 | Typical                       | Typical                       |      |
| CPD    | Power Dissipation Capacitance per gate | C <sub>L</sub> = 0pF, f = 10MHz | 25                            | 26                            | pF   |

## SWITCHING CHARACTERISTICS <sup>(1)</sup>

| Symbol           | Parameter                           | V <sub>CC</sub> = 2.5V ± 0.2V |      | V <sub>CC</sub> = 2.7V |      | V <sub>CC</sub> = 3.3V ± 0.3V |      | Unit |
|------------------|-------------------------------------|-------------------------------|------|------------------------|------|-------------------------------|------|------|
|                  |                                     | Min.                          | Max. | Min.                   | Max. | Min.                          | Max. |      |
| t <sub>PLH</sub> | Propagation Delay<br>xA or xB to xY | 1                             | 3.2  | 1.2                    | 3.4  | 1.2                           | 3.3  | ns   |
| t <sub>PHL</sub> |                                     |                               |      |                        |      |                               |      |      |

**NOTE:**

1. See test circuits and waveforms. T<sub>A</sub> = - 40°C to + 85°C.


## TEST CIRCUITS AND WAVEFORMS

### TEST CONDITIONS

| Symbol            | V <sub>cc</sub> (1) = 3.3V ± 0.3V | V <sub>cc</sub> (1) = 2.7V | V <sub>cc</sub> (2) = 2.5V ± 0.2V | Unit |
|-------------------|-----------------------------------|----------------------------|-----------------------------------|------|
| V <sub>LOAD</sub> | 6                                 | 6                          | 2 x V <sub>cc</sub>               | V    |
| V <sub>IH</sub>   | 2.7                               | 2.7                        | V <sub>cc</sub>                   | V    |
| V <sub>T</sub>    | 1.5                               | 1.5                        | V <sub>cc</sub> / 2               | V    |
| V <sub>LZ</sub>   | 300                               | 300                        | 150                               | mV   |
| V <sub>HZ</sub>   | 300                               | 300                        | 150                               | mV   |
| C <sub>L</sub>    | 50                                | 50                         | 30                                | pF   |

ALVC QUAD Link

### TEST CIRCUITS FOR ALL OUTPUTS

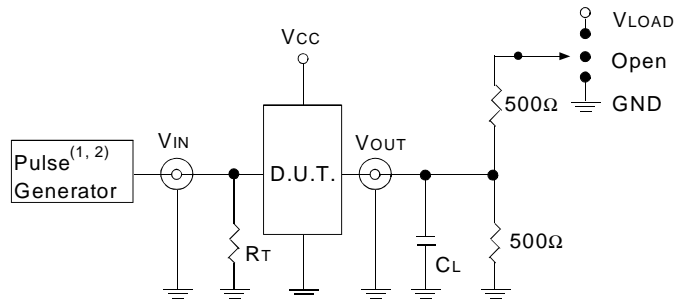

ALVC Link

#### DEFINITIONS:

C<sub>L</sub> = Load capacitance: includes jig and probe capacitance.

R<sub>T</sub> = Termination resistance: should be equal to Z<sub>OUT</sub> of the Pulse Generator.

#### NOTES:


1. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>F</sub> ≤ 2.5ns; t<sub>R</sub> ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 10MHz; t<sub>F</sub> ≤ 2ns; t<sub>R</sub> ≤ 2ns.

### SWITCH POSITION

| Test                                    | Switch            |
|---|-------------------|
| Open Drain<br>Disable Low<br>Enable Low | V <sub>LOAD</sub> |
| Disable High<br>Enable High             | GND               |
| All Other tests                         | Open              |

ALVC QUAD Link

### OUTPUT SKEW - TSK (x)

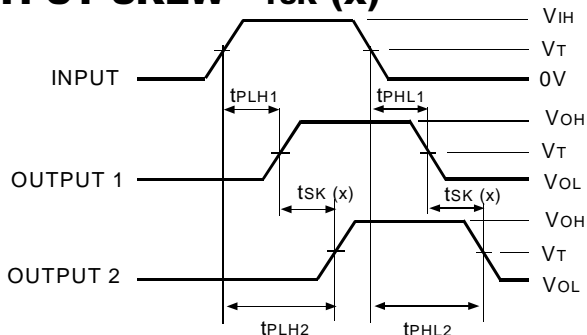


$$TSK(x) = |t_{PLH2} - t_{PLH1}| \text{ or } |t_{PHL2} - t_{PHL1}|$$

#### NOTES:

1. For tsk(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For tsk(b) OUTPUT1 and OUTPUT2 are in the same bank.


ALVC Link

### PROPAGATION DELAY

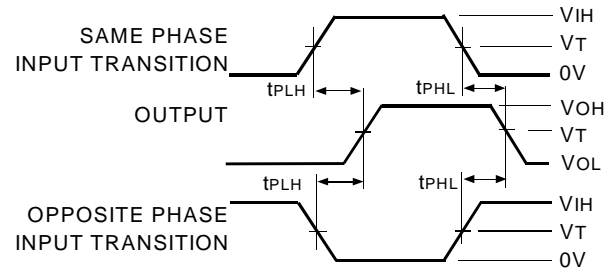

ALVC Link

### ENABLE AND DISABLE TIMES

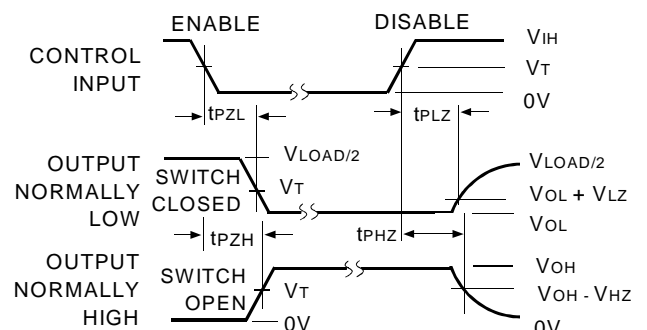


ALVC Link

#### NOTE:


1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

### SET-UP, HOLD, AND RELEASE TIMES

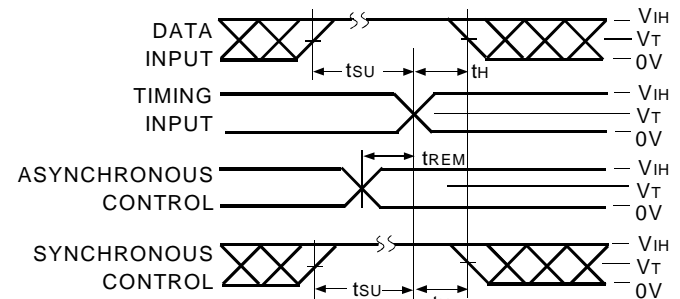


ALVC Link

### PULSE WIDTH

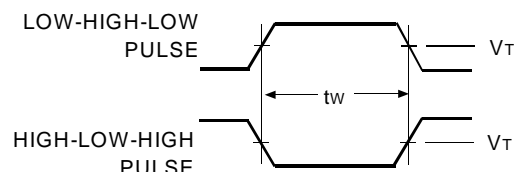

ALVC Link

## ORDERING INFORMATION

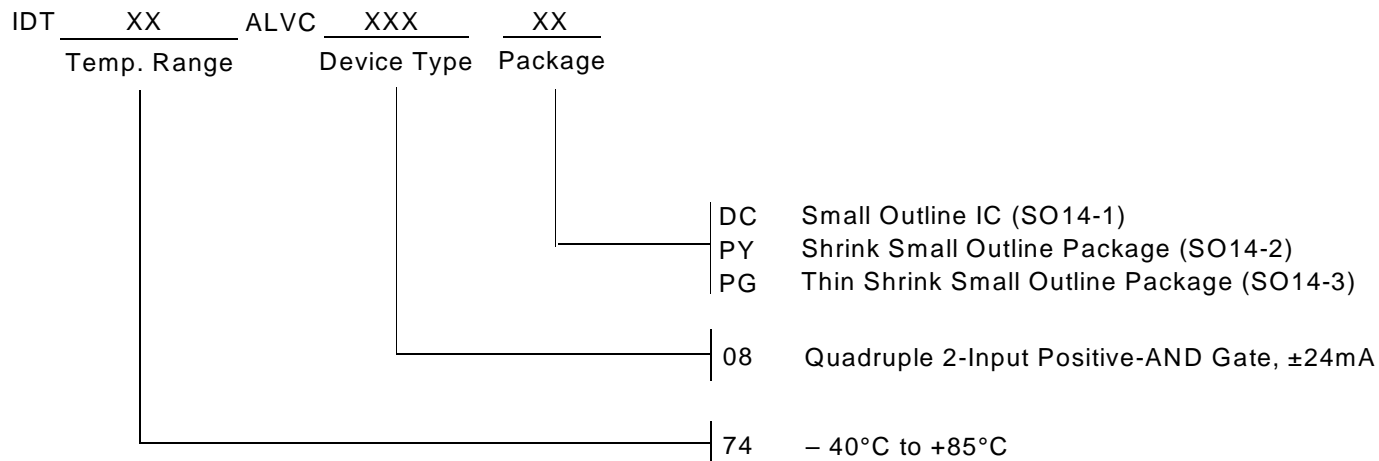

**CORPORATE HEADQUARTERS**  
2975 Stender Way  
Santa Clara, CA 95054

**for SALES:**  
800-345-7015 or 408-727-6116  
fax: 408-492-8674  
[www.idt.com](http://www.idt.com)\*

\*To search for sales office near you, please click the sales button found on our home page or dial the 800# above and press 2.  
The IDT logo is a registered trademark of Integrated Device Technology, Inc.