


## AM/FM TUNER

The KA2297 is a monolithic integrated circuit which consist of FM F/E + AM/FM IF and DET AMP.

The KA2297 is no adjustment AM/FM IF, DET coil

## FEATURES

- Not need AM/FM IF, FM DET COIL
- Built-in FM Front End
- Minimum number of external parts required
- Operating voltage :  $V_{CC} = 1.8V \sim 7V$

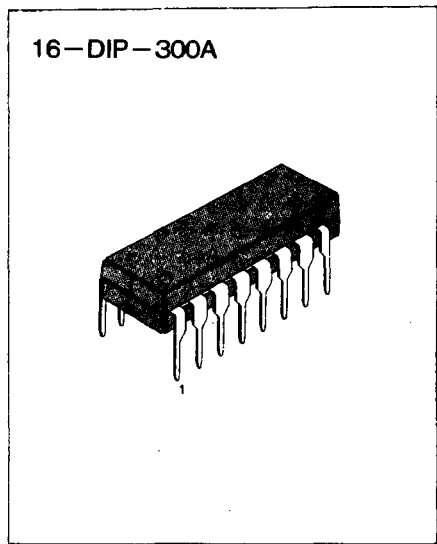

## ORDERING INFORMATION

Device	Package	Operating Temperature
KA2297	16-DIP-300A	-20~+70°C

## BLOCK DIAGRAM

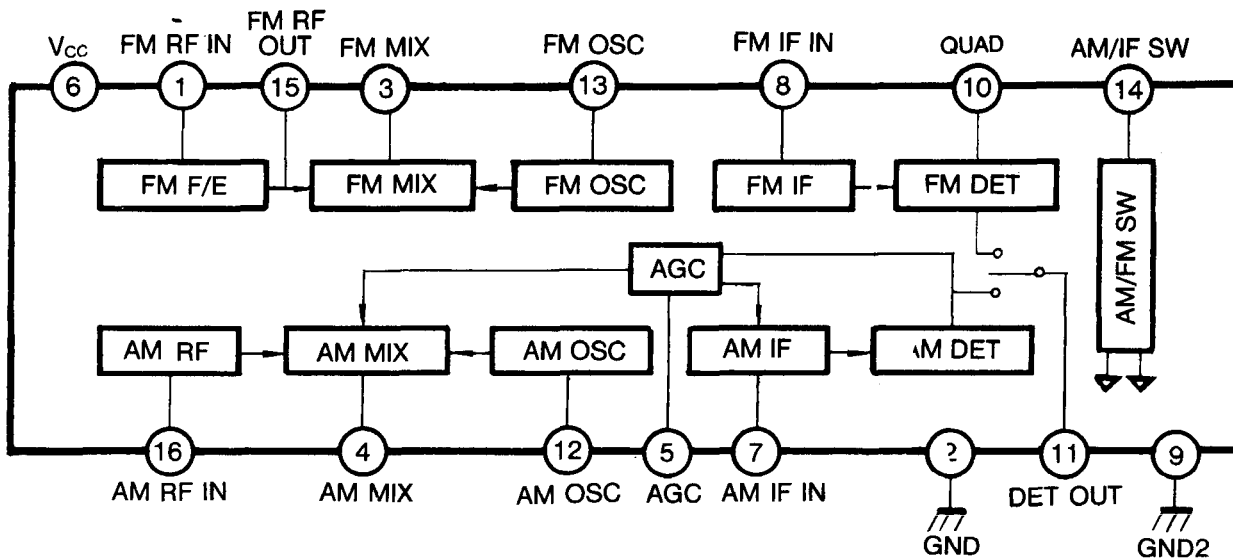


Fig. :1

**ABSOLUTE MAXIMUM RATINGS (Ta=25°C)**

Characteristic	Symbol	Value	Unit
Maximum Supply Voltage	$V_{CC}$	8	V
Power Dissipation	$P_d$	250	mW
Operating Temperature	$T_{opr}$	-20~+75	°C
Storage Temperature	$T_{stg}$	-55~+125	°C

**ELECTRICAL CHARACTERISTICS**(FM F/E:  $f = 98\text{MHz}$ ,  $f_m = 1\text{KHz}$ , FM IF:  $10.7\text{MHz}$ , AM:  $f = 1\text{MHz}$ ,  $f_m = 1\text{KHz}$ ,  $\Delta f = 30\%$ ,  $V_{CC} = 3\text{V}$ )

Characteristic		Symbol	Test Condition	Min	Typ	Max	Unit
Quiescent Circuit Current		$I_{CCQ1}$	FM, $V_i = 0$	6.0	10.0	14.0	mA
		$I_{CCQ2}$	AM, $V_i = 0$	3.0	5.0	8.0	mA
FM F/E	-3dB Limiting	$V_{(LIM)1}$	$V_o = -3\text{dB Point}$		12	22	dB $\mu$
FM	-3dB Limiting Sensitivity	$V_{(LIM)2}$	$V_o = -3\text{dB Point}$	42	47	52	dB $\mu$
IF	Detector Output Voltage	$V_{O(DET)1}$	$V_i = 80\text{dB}\mu$	55	70	85	mV <sub>rms</sub>
	Total Harmonic Distortion	THD <sub>1</sub>	$V_i = 80\text{dB}\mu$		0.4	1	%
	Signal to Noise Ratio	S/N <sub>1</sub>	$V_i = 80\text{dB}\mu$	56	62		dB
	AM Rejection Ratio	AMR	$V_i = 80\text{dB}\mu$	32	38		dB
AM	Voltage Gain <sub>i</sub>	$G_{V1}$	$V_i = 30\text{dB}\mu$	28	50	72	mV <sub>rms</sub>
	Detector Output Voltage	$V_{O(DET)2}$	$V_i = 60\text{dB}\mu$	40	60	82	mV <sub>rms</sub>
	Total Harmonic Distortion	THD <sub>2</sub>	$V_i = 60\text{dB}\mu$		1.0	2.0	%
	Signal to Noise Ratio	S/N <sub>2</sub>	$V_i = 60\text{dB}\mu$	37	43		dB

### TEST CIRCUIT 1

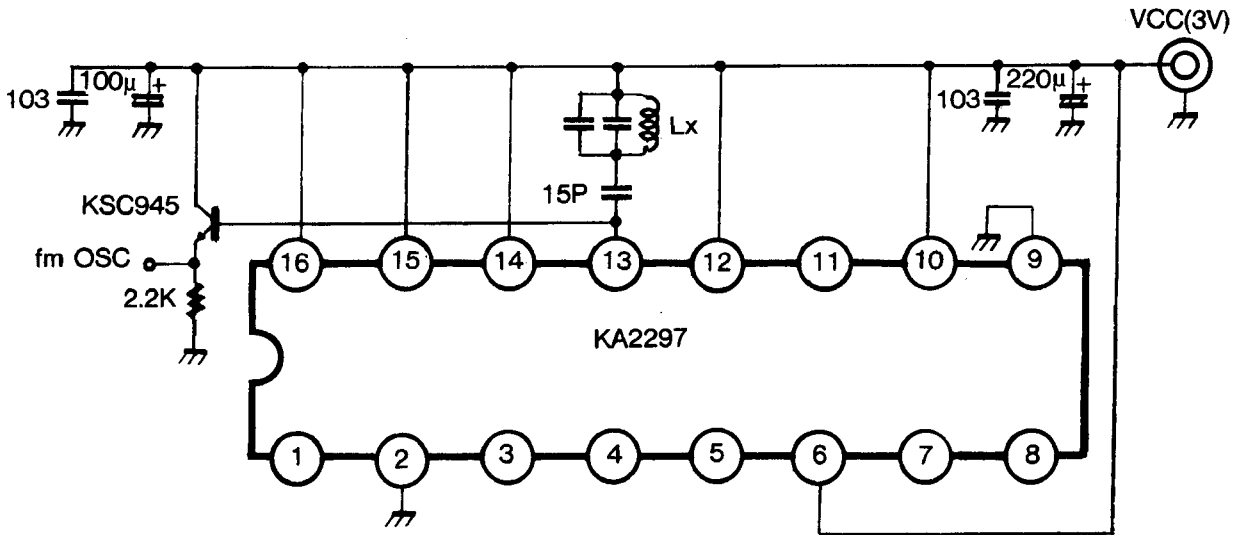


Fig. 2

### TEST CIRCUIT 2

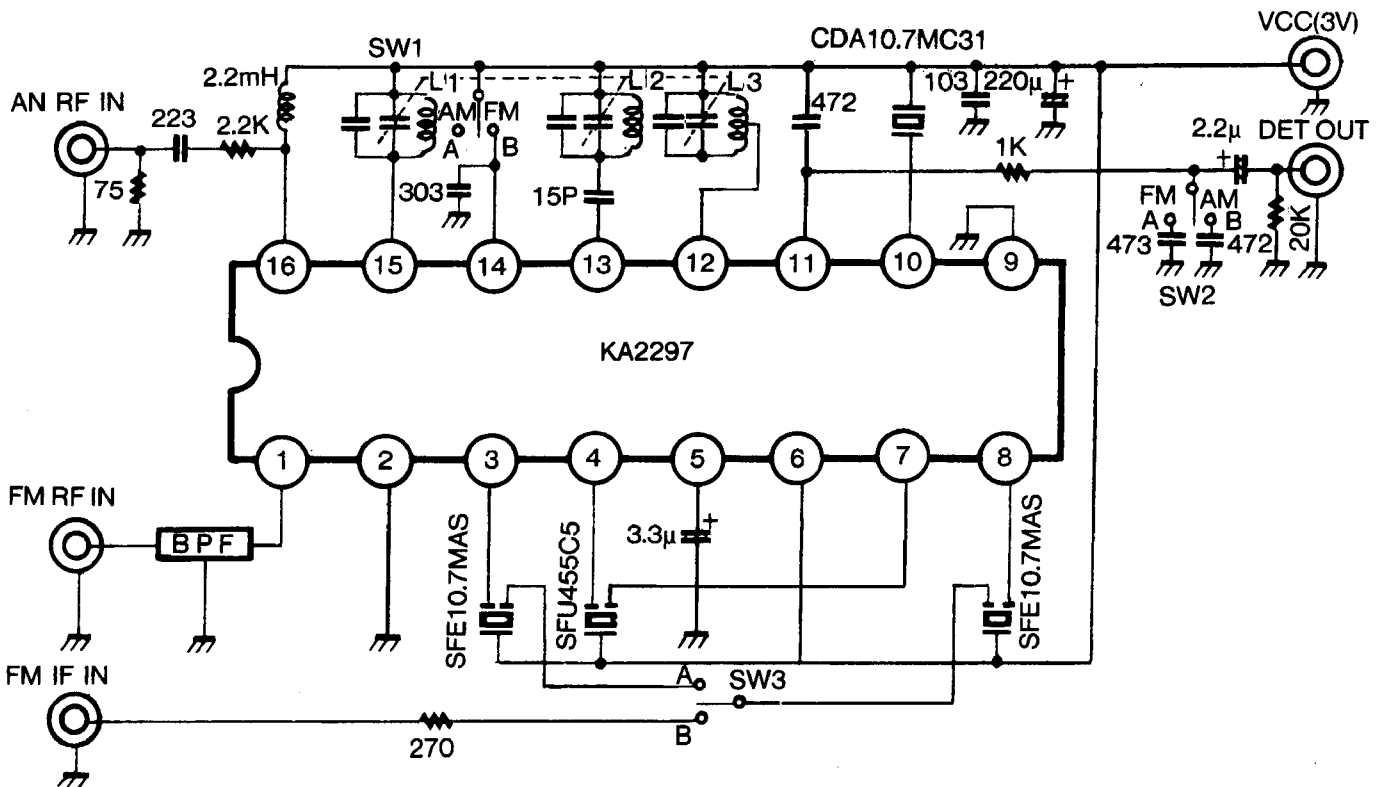





Fig. 3

### COIL SPEC

SEAL NAME	L1		L2		L3	
TURNS	3-1	2 2/8	1-3	2 6/8	1-2	12T
					2-3	73T
WIRE(mmφ)	0.5 UEW		0.5 UEW		0.08 UEW	
CONNECTION (BOTTOM VIEW)						
FREQUENCY	100MHz		100MHz		797KHz	
TUNNG CAPACITY						
INDUCTANCE					268μH ± 8%min	
UNLOADED Q					70min	

### APPLICATION CIRCUIT

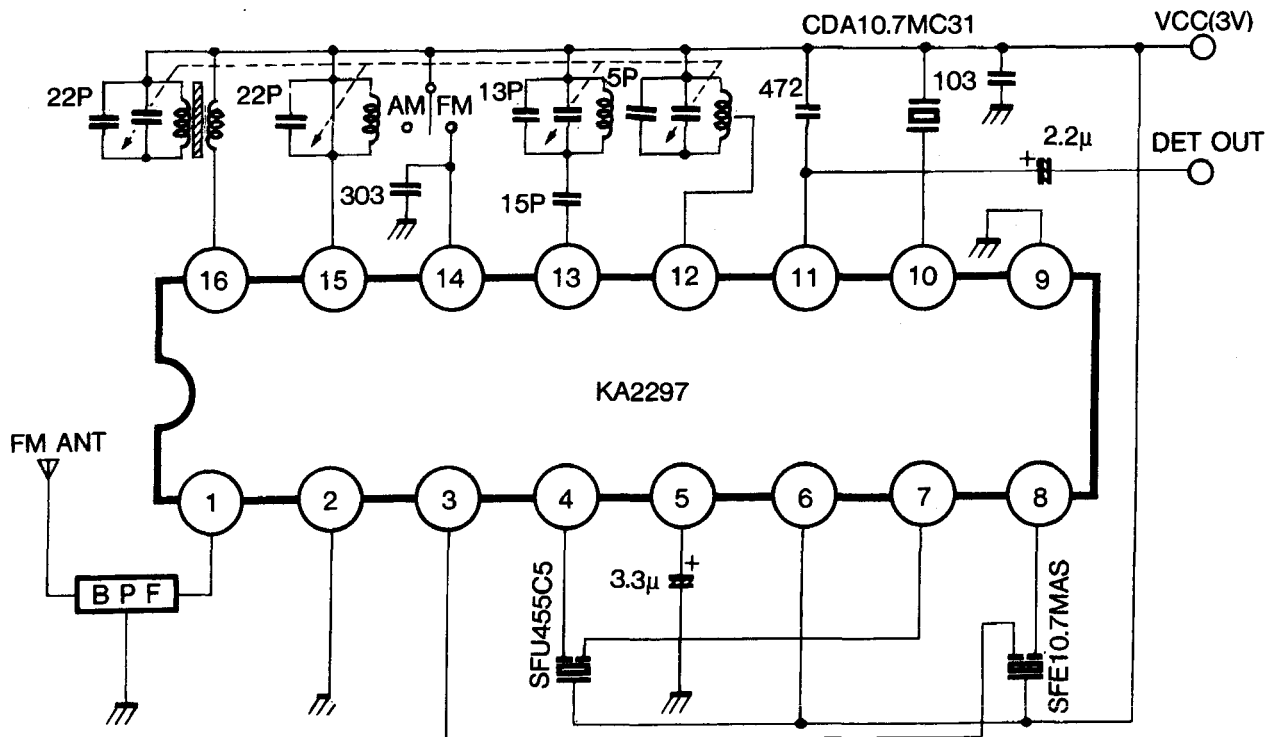


Fig. 4