

**LB1943****Forward/Reverse Motor Driver with Braking Function****Overview**

The LB1943 is a forward/reverse motor driver IC. This IC supports forward, reverse, and braking control from a single input, and the desired output voltage can be set with a resistor. Either full drive or VC drive can be selected from the single input, and the LB1943 can be controlled from a microprocessor.

Functions

- Single-input control of forward, reverse, and braking operations
- Resistor output voltage setup
- Either full drive or VC drive can be selected from the single control input.
- Can be controlled from a microprocessor.
- Built-in motor dash current absorbing device
- Built-in reference voltage circuit
- Built-in thermal protection circuit

Specifications**Absolute Maximum Ratings at Ta = 25°C**

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\ max}$		18	V
Input voltage	V_{IN}	$V_{CC} \geq V_{IN}$	-0.3 to +6	V
Output current	I_{OUT}		± 1.6	A
Allowable power dissipation	$Pd\ max$		1.2	W
Operating temperature	T_{opr}		-25 to +75	°C
Storage temperature	T_{stg}		-55 to +125	°C

Allowable Operating Ranges at Ta = 25°C


Parameter	Symbol	Conditions	Ratings	Unit
Supply voltage range	V_{CC1}		8 to 18	V
	V_{CC2}	$V_{CC1} \geq V_{CC2}$	5 to 18	V
Forward-reverse disabled time	T_{off}		Over 20	μs

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Package Dimensions

unit: mm

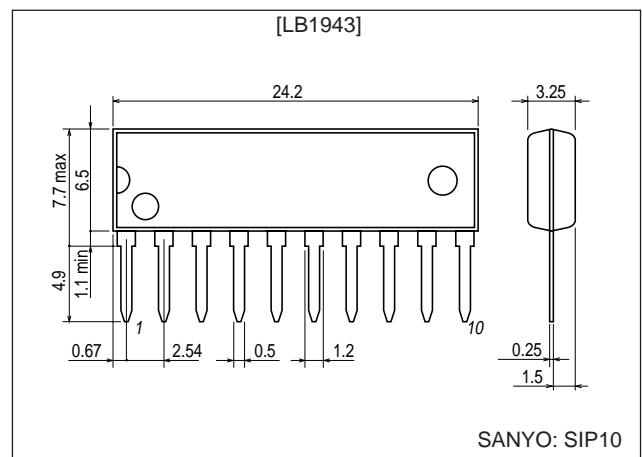3034A-SIP10**SANYO Electric Co.,Ltd. Semiconductor Company**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN



LB1943

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 12\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Input low-level voltage	V_{INL}		0		1	V
Input high-level voltage	V_{INH}		4.2		6.0	V
Input mid-level voltage	V_{INM}		2		3	V
Input impedance	Z_{IN}			75		k Ω
Current drain	I_{CC}			5.5	10.0	mA
Output voltage	V_{OUT1}	$R_L = 60\ \Omega$, $V_C = 2.5\text{ V}$ $V_{IN1} = 2.5\text{ V}$, $V_{IN2} = 0\text{ V}$	4.4	4.95	5.4	V
	V_{OUT2}	$R_L = 60\ \Omega$, $V_C = 2.5\text{ V}$ $V_{IN1} = 2.5\text{ V}$, $V_{IN2} = 5.0\text{ V}$	4.4	4.95	5.4	V
Output leakage current	I_{OL}	$R_L = \infty$		0.01	1.0	mA
Saturation voltage (upper)	V (sat)11	$V_{CC} = 12\text{ V}$, $I_{OUT} = 300\text{ mA}$		1.9	2.2	V
	V (sat)12	$V_{CC} = 12\text{ V}$, $I_{OUT} = 500\text{ mA}$		1.9	2.3	V
Saturation voltage (lower)	V (sat)21	$V_{CC} = 12\text{ V}$, $I_{OUT} = 300\text{ mA}$		0.25	0.5	V
	V (sat)22	$V_{CC} = 12\text{ V}$, $I_{OUT} = 500\text{ mA}$		0.4	0.65	V
Reference power supply	V_{REF}		6.0	6.35	6.8	V
Reference voltage load characteristics	$\Delta V_{REF}/\Delta I_{REF}$	$I_{REF} = 0$ to -2.0 mA		0.05	0.1	V/mA
Control-to-output gain		V_{OUT}/V_C , $V_C = 2.5\text{ V}$, $R_L = 60\ \Omega$	1.5	1.9	2.4	\times
TSD operating temperature	T_{STD}	*	150	180		$^\circ\text{C}$

Note: Items marked with an asterisk (*) are design target values, and are not tested.

Pin Assignment

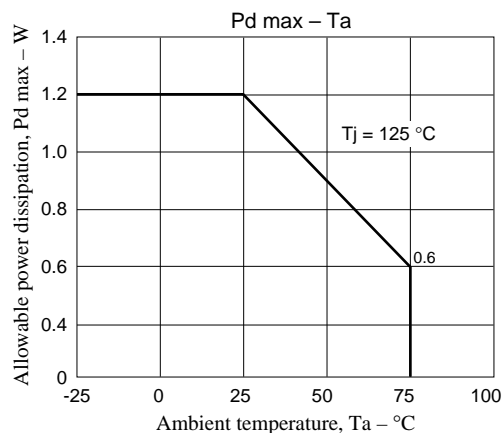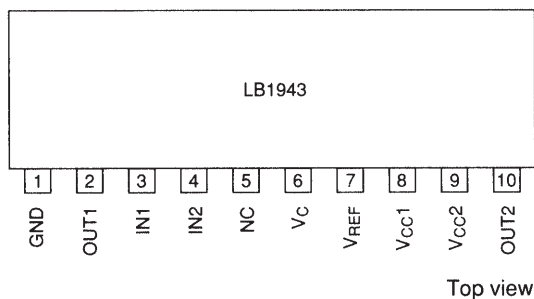

Truth Table

Input		Output voltage		Operation
IN1	IN2	OUT1	OUT2	
H	H	L	FULL	Forward (reverse) operation
M	H	L	$V_C \times 2$	Forward (reverse) operation
L	H	L	$V_C \times 2$	Forward (reverse) operation
H	M	OFF	OFF	Braking
M	M	OFF	OFF	Braking
L	M	OFF	OFF	Braking
H	L	FULL	L	Reverse (forward) operation
M	L	$V_C \times 2$	L	Reverse (forward) operation
L	L	$V_C \times 2$	L	Reverse (forward) operation

Input levels: V_H : Over 4.2 V
 V_M : 2.0 to 3.0 V
 V_L : Under 1.0 V


IN1 and IN2 go to 2.5 V when left open.

LB1943 operation is equivalent to that of the LB1641.


Pin Functions

Pin No.	Symbol	Pin function	Equivalent circuit
1	GND	<ul style="list-style-type: none"> Power system ground. This line is shared with the signal system ground. 	
3	IN1	<ul style="list-style-type: none"> Output voltage switching input Goes to V_M (about 2.5 V) when left open. 	
4	IN2	<ul style="list-style-type: none"> Forward, reverse, or braking control input Goes to V_M (about 2.5 V) when left open. 	
6	V_C	<ul style="list-style-type: none"> Output voltage setting 	
7	V_{REF}	<ul style="list-style-type: none"> Reference voltage output. $V_{REF} = 6.35$ V 	
8	V_{CC1}	<ul style="list-style-type: none"> Signal system power supply 	
9	V_{CC2}	<ul style="list-style-type: none"> Power system power supply 	
2 10	OUT1 OUT2	<ul style="list-style-type: none"> Outputs that are connected to the motor coils 	

Internal Equivalent Circuit

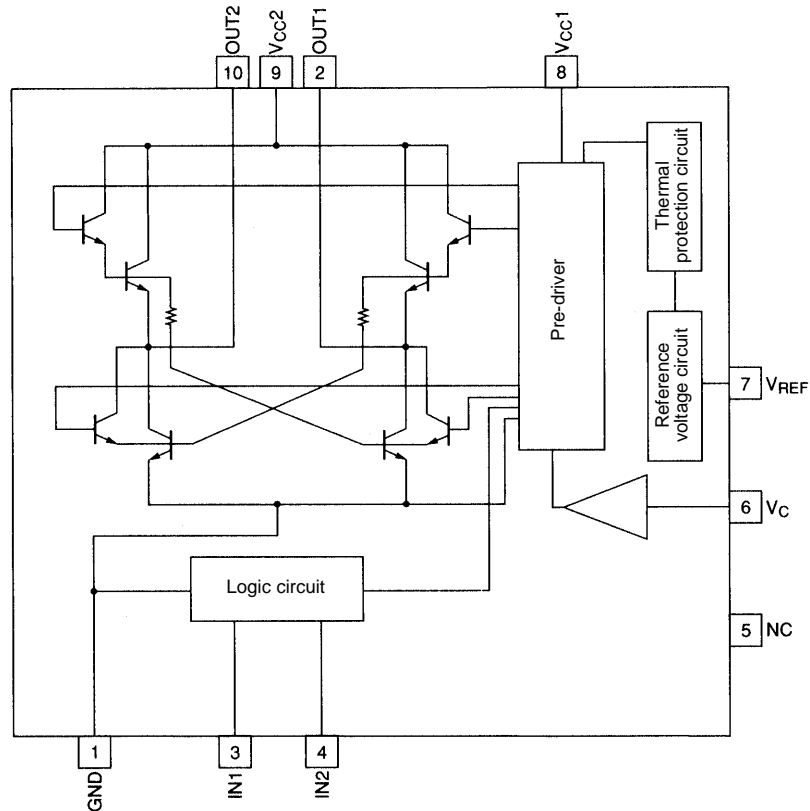

Peripheral Circuit Example

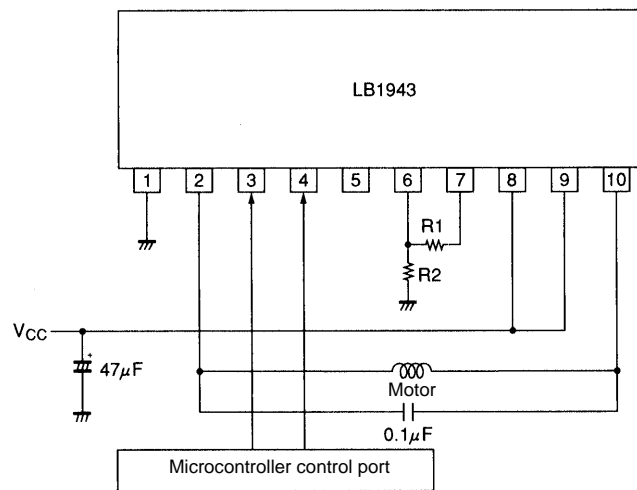

Usage Notes

1. The microprocessor output ports are CMOS outputs, and must be used in the high, low, or open states.
2. We recommend using a value of about 60 kΩ for R1 and R2.
3. Voltages applied to the IN1 and IN2 pins must not exceed the range 0 to 6 V. Note that negative voltages can cause the IC to operate incorrectly. Also, do not apply voltages to IN1 or IN2 when the V_{CC} voltage is not applied.
4. To prevent the upper and lower output transistors from both being in the on state at the same time, when switching the IN1 and IN2 values, always hold the input open for a brief period during the transition. We recommend holding the open state for a few tens of microseconds.
5. A capacitor must be inserted between V_{CC} and ground. We recommend that this capacitor have a value of at least 20 µF.

6. During motor drive, large currents (on the order of several hundred mA) flow in the motor power supply block. Therefore, the printed circuit board layout and interconnections must be designed so that there are no shared devices.
7. If negative voltages are applied to OUT1 and OUT2 and the IC operates incorrectly, insert Schottky diodes between OUT1 and ground and between OUT2 and ground.

■ Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1999. Specifications and information herein are subject to change without notice.