

**NPN SILICON EPITAXIAL TWIN TRANSISTOR  
(WITH BUILT-IN 2 × 2SC5006)  
FLAT-LEAD 6-PIN THIN-TYPE ULTRA SUPER MINIMOLD**

#### DESCRIPTION

The μPA821TC has built-in low-voltage two transistors which are designed for low-noise amplification in the VHF to UHF band.

#### FEATURES

- Low noise: NF= 1.2 dB TYP. @ f = 1 GHz, V<sub>CE</sub> = 3 V, I<sub>c</sub> = 7 mA
- High gain: IS<sub>21dB</sub><sup>2</sup> = 9.0 dB TYP. @ f = 1 GHz, V<sub>CE</sub> = 3 V, I<sub>c</sub> = 7 mA
- Flat-lead 6-pin thin-type ultra super minimold package
- Built-in 2 transistors (2 × 2SC5006)

#### ORDERING INFORMATION

Part Number	Package	Quantity	Supplying Form
μPA821TC	Flat-lead 6-pin thin-type ultra super minimold	Loose products (50 pcs)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Emitter), Pin 4 (Q2 Base) face to perforation side of the tape.
μPA821TC-T1		Taping products (3 kp/reel)	

**Remark** To order evaluation samples, please contact your local NEC sales office. (Part number for sample order: μPA821TC. Unit sample quantity is 50 pcs).

#### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = +25°C)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	V <sub>CBO</sub>	20	V
Collector to Emitter Voltage	V <sub>CEO</sub>	12	V
Emitter to Base Voltage	V <sub>EBO</sub>	3	V
Collector Current	I <sub>c</sub>	100	mA
Total Power Dissipation	P <sub>T</sub> <sup>Note</sup>	200 in 1 element 230 in 2 elements	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-65 to 150	°C

**Note** Mounted on 1.08 cm<sup>2</sup> × 1.0 mm glass epoxy substrate.

**Caution Electro-static sensitive devices.**

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = +25°C)**





Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = 10 V, I <sub>E</sub> = 0	–	–	1.0	μA
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = 1 V, I <sub>C</sub> = 0	–	–	1.0	μA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA <sup>Note 1</sup>	70	–	140	
Gain Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	3.0	4.5	–	GHz
Feedback Capacitance	C <sub>re</sub>	V <sub>CB</sub> = 3 V, I <sub>E</sub> = 0, f = 1 MHz <sup>Note 2</sup>	–	0.7	1.5	pF
Insertion Power Gain	S <sub>21e</sub>   <sup>2</sup>	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	7.0	9.0	–	dB
Noise Figure	NF	V <sub>CE</sub> = 3 V, I <sub>C</sub> = 7 mA, f = 1 GHz	–	1.2	2.5	dB

- Notes 1.** Pulse Measurement: PW ≤ 350 μs, Duty Cycle ≤ 2 %  
**2.** Capacitance between collector and base measured with a capacitance meter (auto-balancing bridge method). Emitter should be connected to the guard pin of capacitance meter.


**h<sub>FE</sub> CLASSIFICATION**

Rank	FB
Marking	81
h <sub>FE</sub> Value	70 to 140


TYPICAL CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ )

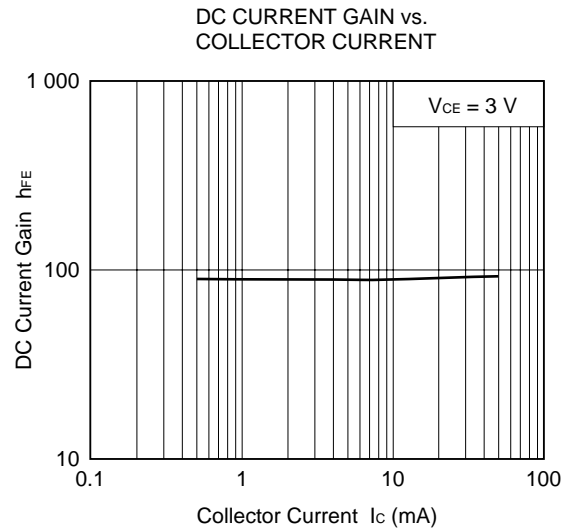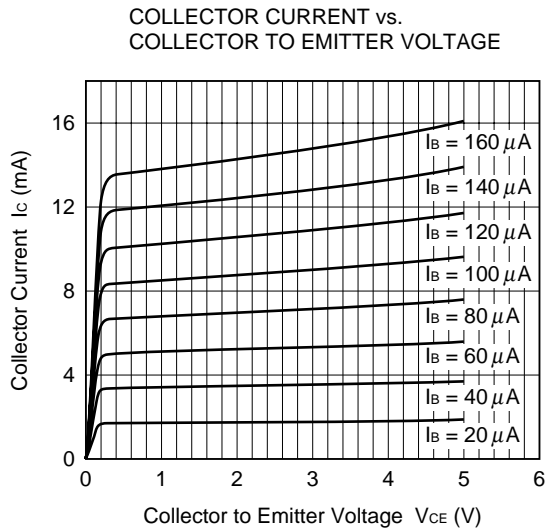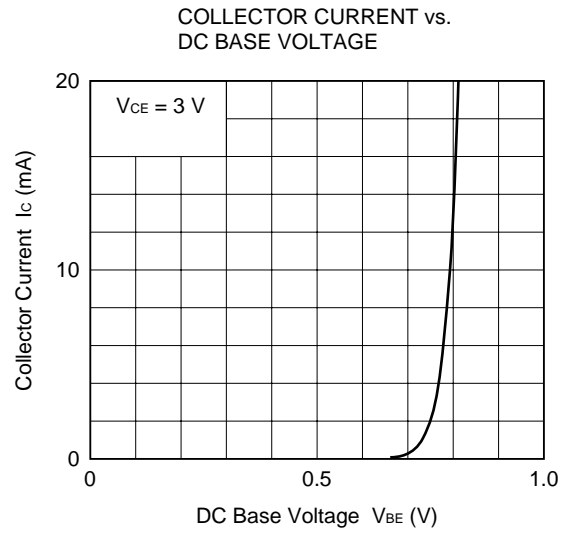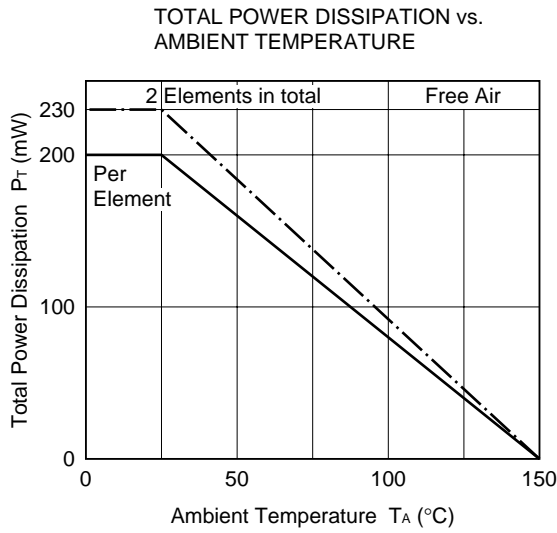


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

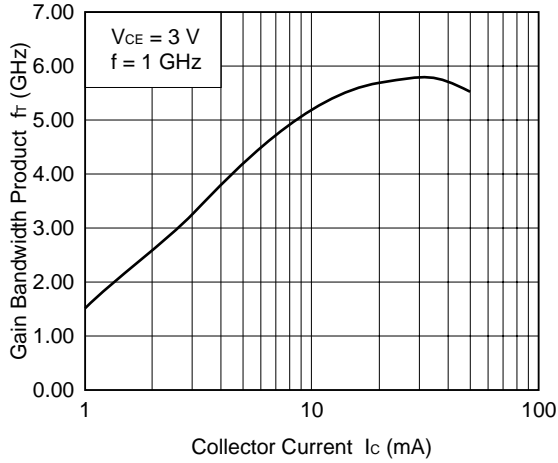


INSERTION POWER GAIN vs. COLLECTOR CURRENT

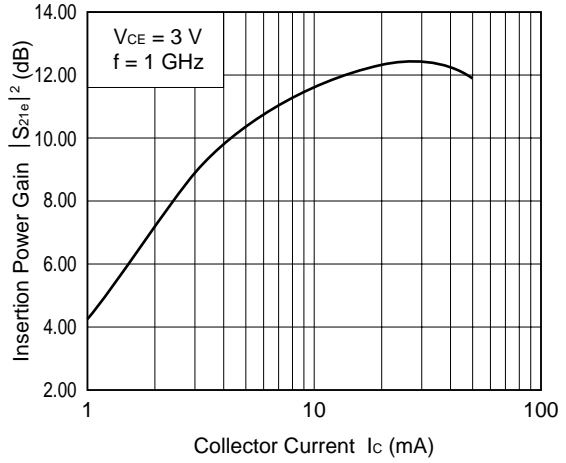


NOISE FIGURE vs. COLLECTOR CURRENT

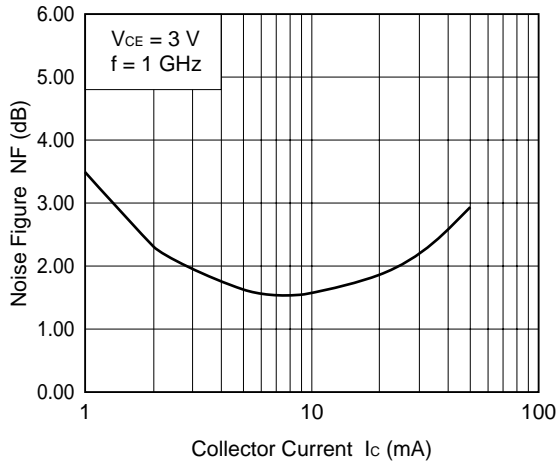

INSERTION POWER GAIN vs. FREQUENCY

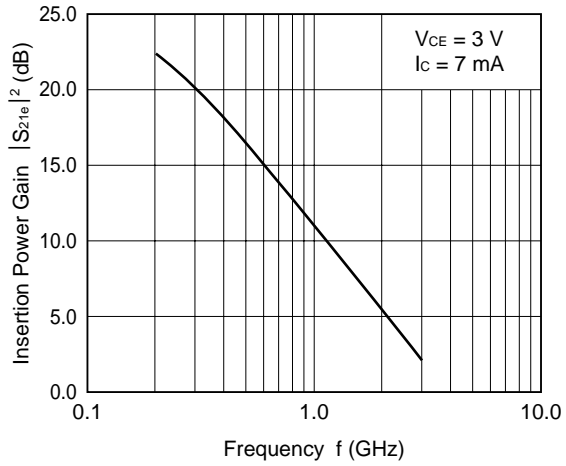

FEEDBACK CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

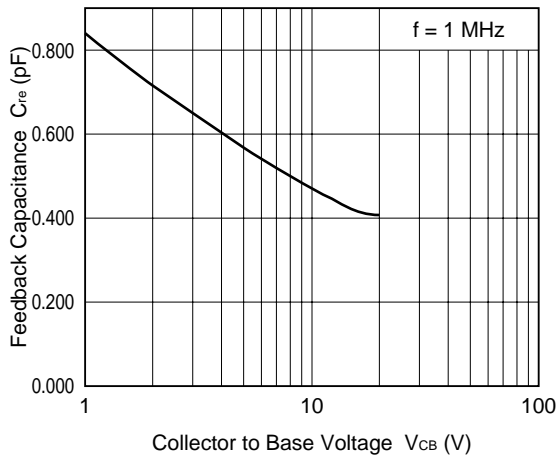

**S-PARAMETER Q1**

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 1 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.941	-30.4	3.863	157.1	0.058	64.5	0.997	-13.0
0.2	0.913	-58.3	3.499	136.9	0.079	52.1	0.947	-25.8
0.3	0.872	-83.6	3.156	118.9	0.103	35.2	0.898	-37.2
0.4	0.847	-107.8	2.833	101.5	0.125	20.1	0.845	-47.7
0.5	0.807	-129.2	2.549	85.9	0.130	8.6	0.793	-56.4
0.6	0.786	-148.3	2.281	71.5	0.142	-4.6	0.755	-64.9
0.7	0.773	-165.3	2.069	58.3	0.146	-15.7	0.718	-72.9
0.8	0.763	178.4	1.880	45.8	0.150	-25.2	0.693	-81.2
0.9	0.753	163.7	1.726	33.9	0.149	-33.2	0.673	-88.6
1.0	0.748	150.0	1.597	22.5	0.146	-42.0	0.656	-96.4
1.1	0.749	136.7	1.479	11.6	0.144	-49.9	0.644	-104.8
1.2	0.740	124.2	1.378	1.1	0.141	-57.4	0.633	-112.6
1.3	0.748	111.9	1.291	-9.2	0.135	-64.1	0.623	-120.4
1.4	0.748	100.6	1.216	-19.3	0.127	-71.9	0.614	-128.6
1.5	0.756	89.6	1.147	-29.1	0.124	-77.6	0.608	-137.1
1.6	0.757	78.6	1.079	-38.8	0.118	-81.3	0.602	-145.6
1.7	0.762	68.6	1.025	-48.1	0.110	-86.0	0.597	-154.5
1.8	0.765	58.2	0.973	-57.4	0.105	-88.5	0.594	-163.3
1.9	0.770	48.6	0.928	-66.3	0.102	-92.8	0.593	-172.3
2.0	0.773	38.7	0.882	-75.2	0.100	-93.1	0.587	178.7
2.1	0.779	29.2	0.841	-83.8	0.098	-95.6	0.584	169.7
2.2	0.776	20.0	0.801	-92.6	0.097	-95.0	0.580	160.0
2.3	0.786	11.4	0.767	-100.7	0.097	-95.6	0.577	150.3
2.4	0.788	2.0	0.736	-109.0	0.102	-96.1	0.577	140.6
2.5	0.791	-6.5	0.705	-116.8	0.111	-97.8	0.574	130.5
2.6	0.795	-15.0	0.677	-124.7	0.119	-99.7	0.577	120.4
2.7	0.797	-23.6	0.651	-132.0	0.131	-102.7	0.573	110.3
2.8	0.797	-31.2	0.624	-139.8	0.139	-108.3	0.573	100.1
2.9	0.801	-39.3	0.602	-147.3	0.146	-113.9	0.572	90.3
3.0	0.810	-47.0	0.578	-154.6	0.152	-117.5	0.582	80.2

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 3 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.869	-42.8	9.904	149.2	0.038	52.2	0.945	-21.8
0.2	0.794	-78.9	8.266	125.9	0.070	45.7	0.819	-38.9
0.3	0.737	-108.3	6.914	106.6	0.088	30.5	0.711	-52.4
0.4	0.695	-133.8	5.786	89.7	0.087	16.2	0.623	-62.4
0.5	0.669	-154.6	4.961	75.5	0.103	5.7	0.553	-71.2
0.6	0.652	-172.5	4.274	62.6	0.101	-0.4	0.506	-78.2
0.7	0.641	172.0	3.789	50.9	0.103	-10.3	0.470	-85.7
0.8	0.636	157.8	3.375	39.8	0.108	-14.9	0.440	-92.3
0.9	0.634	144.5	3.030	29.4	0.110	-22.1	0.417	-99.5
1.0	0.634	132.1	2.760	19.2	0.108	-26.9	0.397	-106.7
1.1	0.637	120.4	2.538	9.3	0.111	-31.4	0.386	-114.0
1.2	0.638	108.9	2.341	-0.1	0.114	-36.6	0.372	-121.6
1.3	0.643	98.6	2.178	-9.4	0.116	-40.6	0.362	-129.4
1.4	0.647	88.3	2.036	-18.6	0.114	-45.4	0.350	-136.6
1.5	0.654	78.3	1.917	-27.9	0.118	-49.6	0.343	-145.7
1.6	0.659	68.6	1.804	-36.9	0.120	-54.4	0.335	-153.7
1.7	0.665	59.2	1.700	-45.7	0.123	-58.0	0.330	-162.4
1.8	0.673	49.7	1.615	-54.7	0.127	-62.5	0.325	-171.0
1.9	0.679	40.8	1.533	-63.1	0.130	-67.3	0.319	179.7
2.0	0.684	31.6	1.458	-71.8	0.137	-70.3	0.318	170.8
2.1	0.689	23.0	1.393	-80.2	0.140	-75.8	0.313	161.6
2.2	0.695	14.5	1.329	-88.7	0.146	-79.9	0.308	151.7
2.3	0.704	6.1	1.274	-96.8	0.152	-85.2	0.306	141.8
2.4	0.709	-2.2	1.220	-105.1	0.157	-89.9	0.305	132.4
2.5	0.713	-10.4	1.172	-112.9	0.165	-94.8	0.299	121.2
2.6	0.720	-18.4	1.130	-121.0	0.173	-99.8	0.304	110.7
2.7	0.725	-26.6	1.083	-128.8	0.181	-105.7	0.307	100.5
2.8	0.734	-34.4	1.040	-136.8	0.189	-111.1	0.308	90.0
2.9	0.737	-42.2	1.010	-144.4	0.197	-116.8	0.309	79.6
3.0	0.744	-49.8	0.974	-152.1	0.206	-121.9	0.317	68.9

V<sub>CE</sub> = 3 V, I<sub>C</sub> = 5 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.795	-50.7	14.193	144.1	0.042	40.1	0.913	-27.9
0.2	0.713	-93.1	11.180	118.7	0.061	45.2	0.735	-46.8
0.3	0.656	-123.6	8.924	99.5	0.071	28.4	0.601	-60.5
0.4	0.625	-147.9	7.214	83.6	0.079	16.9	0.501	-70.4
0.5	0.603	-166.9	6.066	70.3	0.085	14.3	0.437	-77.9
0.6	0.593	175.8	5.156	58.3	0.087	5.1	0.392	-85.2
0.7	0.588	161.3	4.500	47.3	0.091	-3.8	0.355	-92.3
0.8	0.586	147.7	3.990	37.1	0.091	-7.2	0.328	-98.9
0.9	0.591	135.5	3.580	27.1	0.098	-10.1	0.310	-105.5
1.0	0.590	123.9	3.247	17.5	0.101	-16.3	0.292	-112.1
1.1	0.598	112.9	2.973	8.1	0.105	-20.4	0.277	-120.2
1.2	0.599	102.6	2.741	-1.2	0.108	-24.9	0.264	-127.8
1.3	0.607	92.5	2.540	-10.1	0.114	-30.3	0.259	-135.6
1.4	0.611	82.4	2.370	-19.1	0.119	-34.6	0.250	-143.3
1.5	0.618	73.0	2.227	-27.8	0.124	-40.1	0.241	-152.5
1.6	0.625	63.7	2.093	-36.8	0.131	-45.2	0.233	-160.3
1.7	0.631	54.8	1.973	-45.1	0.134	-49.8	0.230	-169.7
1.8	0.639	45.7	1.868	-53.8	0.141	-54.6	0.223	-177.6
1.9	0.645	37.1	1.781	-62.0	0.146	-60.4	0.219	171.6
2.0	0.649	28.4	1.688	-70.6	0.155	-66.1	0.215	162.5
2.1	0.654	19.7	1.613	-79.0	0.161	-72.0	0.211	152.9
2.2	0.658	11.5	1.535	-87.2	0.168	-76.9	0.208	142.9
2.3	0.668	3.5	1.475	-95.2	0.174	-81.6	0.206	131.2
2.4	0.676	-4.8	1.413	-103.3	0.182	-88.0	0.206	121.1
2.5	0.679	-12.7	1.357	-111.3	0.192	-94.5	0.203	109.4
2.6	0.686	-20.6	1.303	-119.4	0.201	-100.3	0.206	99.1
2.7	0.688	-27.8	1.256	-127.3	0.211	-108.8	0.209	88.7
2.8	0.705	-35.0	1.210	-134.9	0.203	-116.3	0.219	77.2
2.9	0.716	-43.3	1.169	-142.6	0.210	-120.4	0.221	65.3
3.0	0.722	-50.9	1.133	-149.7	0.220	-125.2	0.230	54.7

V<sub>CE</sub> = 3 V, I<sub>C</sub> = 7 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.728	-59.4	17.820	139.6	0.052	34.1	0.894	-32.6
0.2	0.646	-105.6	13.278	113.3	0.054	40.0	0.655	-53.9
0.3	0.597	-135.1	10.194	94.7	0.063	32.2	0.515	-66.6
0.4	0.572	-159.0	8.098	79.7	0.062	23.0	0.425	-76.4
0.5	0.571	-176.6	6.725	67.0	0.072	13.4	0.356	-83.9
0.6	0.563	167.9	5.698	55.6	0.080	10.6	0.319	-90.2
0.7	0.563	153.9	4.929	45.3	0.079	5.4	0.287	-97.4
0.8	0.564	141.5	4.353	35.5	0.090	-0.2	0.261	-104.0
0.9	0.565	129.9	3.907	25.8	0.094	-4.4	0.244	-111.3
1.0	0.569	119.2	3.527	16.4	0.098	-7.5	0.232	-117.4
1.1	0.577	108.5	3.235	7.2	0.102	-14.4	0.219	-126.0
1.2	0.579	98.6	2.977	-1.6	0.111	-19.8	0.206	-132.8
1.3	0.586	89.0	2.759	-10.5	0.116	-24.4	0.198	-142.0
1.4	0.593	79.2	2.571	-19.2	0.123	-29.1	0.190	-149.4
1.5	0.601	70.1	2.411	-28.0	0.130	-34.2	0.184	-159.1
1.6	0.605	61.2	2.264	-36.4	0.135	-40.4	0.175	-167.5
1.7	0.612	52.3	2.130	-44.9	0.144	-45.8	0.173	-178.3
1.8	0.620	43.6	2.014	-53.3	0.149	-51.4	0.166	172.4
1.9	0.627	34.9	1.926	-61.5	0.157	-57.6	0.163	162.2
2.0	0.631	26.4	1.822	-69.9	0.164	-62.2	0.160	152.2
2.1	0.644	18.2	1.735	-78.0	0.168	-69.0	0.156	141.8
2.2	0.646	9.8	1.659	-86.5	0.177	-75.4	0.153	130.0
2.3	0.654	1.9	1.592	-94.3	0.185	-80.9	0.155	117.7
2.4	0.660	-6.1	1.525	-102.4	0.193	-87.6	0.157	106.5
2.5	0.663	-13.8	1.464	-110.0	0.204	-94.3	0.158	94.9
2.6	0.662	-21.3	1.405	-117.9	0.213	-100.4	0.162	84.0
2.7	0.675	-28.7	1.352	-125.9	0.220	-108.9	0.167	73.6
2.8	0.690	-35.8	1.302	-133.5	0.215	-116.5	0.179	61.6
2.9	0.703	-44.2	1.261	-141.0	0.221	-120.2	0.183	50.2
3.0	0.711	-51.8	1.221	-148.8	0.227	-126.4	0.195	39.0

**S-PARAMETER Q2**

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 1 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.940	-30.5	3.922	157.0	0.055	52.8	0.994	-13.7
0.2	0.908	-58.7	3.540	136.7	0.080	52.1	0.939	-26.0
0.3	0.876	-83.9	3.181	118.8	0.107	35.6	0.891	-37.4
0.4	0.848	-107.0	2.840	101.5	0.121	18.0	0.838	-47.5
0.5	0.816	-127.6	2.559	86.2	0.135	10.1	0.789	-56.7
0.6	0.793	-146.3	2.289	71.9	0.143	-2.9	0.747	-65.1
0.7	0.774	-163.2	2.075	58.8	0.146	-14.3	0.713	-73.5
0.8	0.762	-178.2	1.889	46.8	0.147	-24.0	0.688	-81.1
0.9	0.758	167.8	1.735	35.3	0.148	-30.6	0.671	-89.2
1.0	0.750	154.4	1.604	23.9	0.148	-39.8	0.655	-97.0
1.1	0.749	142.1	1.492	13.3	0.141	-46.9	0.635	-105.2
1.2	0.746	130.1	1.392	2.9	0.139	-53.2	0.623	-112.9
1.3	0.751	118.8	1.306	-7.2	0.135	-61.4	0.613	-121.0
1.4	0.746	107.5	1.231	-16.9	0.127	-66.3	0.606	-129.9
1.5	0.751	97.2	1.162	-26.6	0.126	-71.8	0.598	-138.5
1.6	0.755	87.2	1.107	-36.0	0.119	-77.1	0.591	-146.8
1.7	0.759	77.2	1.051	-45.3	0.114	-80.6	0.585	-155.8
1.8	0.759	67.5	1.004	-54.5	0.109	-83.1	0.578	-164.6
1.9	0.763	58.0	0.966	-63.4	0.108	-86.2	0.574	-173.8
2.0	0.765	48.6	0.915	-72.1	0.103	-87.0	0.572	176.6
2.1	0.768	39.7	0.877	-80.7	0.100	-89.5	0.562	167.1
2.2	0.767	30.8	0.840	-89.2	0.105	-89.5	0.561	156.9
2.3	0.771	22.4	0.808	-97.4	0.106	-90.5	0.557	146.9
2.4	0.774	13.4	0.776	-105.8	0.114	-90.8	0.553	136.7
2.5	0.780	5.0	0.746	-113.5	0.120	-91.9	0.550	126.3
2.6	0.785	-3.1	0.721	-121.7	0.128	-95.2	0.550	115.6
2.7	0.787	-11.8	0.693	-129.1	0.140	-97.0	0.548	105.1
2.8	0.790	-19.4	0.667	-136.4	0.149	-101.2	0.551	94.6
2.9	0.792	-27.5	0.647	-143.8	0.162	-105.3	0.550	83.6
3.0	0.795	-35.2	0.626	-150.8	0.176	-110.7	0.551	72.6

V<sub>CE</sub> = 3 V, I<sub>c</sub> = 3 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.859	-41.4	9.530	149.9	0.059	46.3	0.965	-20.7
0.2	0.803	-78.2	7.977	126.6	0.067	42.2	0.836	-37.7
0.3	0.744	-106.9	6.695	107.5	0.088	26.9	0.727	-51.2
0.4	0.703	-131.2	5.614	90.7	0.091	17.2	0.637	-60.7
0.5	0.687	-151.3	4.863	76.4	0.100	7.7	0.568	-68.7
0.6	0.665	-169.1	4.172	63.9	0.101	0.0	0.519	-76.5
0.7	0.655	176.4	3.678	52.2	0.101	-8.0	0.480	-82.4
0.8	0.649	162.7	3.300	41.3	0.107	-14.3	0.448	-90.3
0.9	0.646	150.1	2.967	31.1	0.107	-19.3	0.429	-97.3
1.0	0.641	138.2	2.717	21.0	0.110	-24.9	0.410	-104.2
1.1	0.648	126.9	2.500	11.2	0.111	-29.8	0.393	-111.7
1.2	0.646	116.4	2.317	1.6	0.110	-35.0	0.380	-119.2
1.3	0.645	106.2	2.155	-7.4	0.113	-40.3	0.371	-126.7
1.4	0.652	96.4	2.021	-16.6	0.114	-44.3	0.359	-134.5
1.5	0.662	87.0	1.904	-25.5	0.116	-47.3	0.351	-142.6
1.6	0.662	77.6	1.797	-34.5	0.120	-51.6	0.341	-151.1
1.7	0.668	68.5	1.705	-43.5	0.123	-54.8	0.336	-160.0
1.8	0.670	59.4	1.618	-52.2	0.127	-59.1	0.329	-168.6
1.9	0.675	50.8	1.551	-60.5	0.130	-64.0	0.324	-177.8
2.0	0.678	42.2	1.472	-69.2	0.137	-68.8	0.314	172.8
2.1	0.686	33.4	1.409	-77.4	0.142	-73.0	0.305	163.4
2.2	0.686	25.4	1.348	-86.1	0.147	-76.7	0.302	153.5
2.3	0.693	17.1	1.294	-94.2	0.153	-80.8	0.299	142.8
2.4	0.698	9.0	1.242	-102.3	0.162	-85.7	0.293	132.5
2.5	0.703	1.3	1.200	-110.1	0.169	-90.6	0.293	121.8
2.6	0.709	-6.7	1.157	-118.3	0.178	-95.8	0.291	110.9
2.7	0.710	-14.2	1.123	-125.6	0.186	-101.3	0.291	99.8
2.8	0.717	-21.9	1.080	-133.7	0.195	-107.2	0.291	88.4
2.9	0.724	-29.5	1.044	-141.5	0.204	-112.5	0.293	77.1
3.0	0.727	-37.0	1.009	-149.4	0.215	-118.5	0.298	66.0

V<sub>CE</sub> = 3 V, I<sub>C</sub> = 5 mA, Z<sub>0</sub> = 50 Ω

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.774	-52.0	14.036	144.4	0.035	28.8	0.928	-27.8
0.2	0.700	-93.8	11.057	119.1	0.057	40.7	0.729	-45.7
0.3	0.657	-122.9	8.835	100.1	0.072	31.2	0.602	-59.2
0.4	0.630	-146.9	7.147	84.3	0.076	17.7	0.505	-69.4
0.5	0.616	-165.6	6.011	71.1	0.077	12.2	0.439	-76.1
0.6	0.601	179.2	5.143	59.3	0.087	7.0	0.397	-83.6
0.7	0.598	164.7	4.479	48.5	0.088	0.7	0.359	-88.8
0.8	0.597	152.3	3.984	38.6	0.096	-6.8	0.329	-95.9
0.9	0.598	140.5	3.571	28.4	0.096	-9.8	0.311	-102.9
1.0	0.601	129.9	3.240	19.1	0.103	-14.3	0.291	-109.3
1.1	0.601	119.4	2.971	9.8	0.106	-18.6	0.278	-116.6
1.2	0.604	109.4	2.745	0.7	0.108	-23.8	0.267	-123.4
1.3	0.612	100.3	2.554	-8.2	0.113	-27.9	0.254	-131.2
1.4	0.615	90.8	2.387	-17.0	0.116	-32.9	0.245	-138.8
1.5	0.622	81.6	2.236	-25.7	0.122	-36.1	0.236	-147.5
1.6	0.624	73.0	2.115	-34.5	0.129	-41.3	0.227	-156.5
1.7	0.631	64.5	2.003	-42.8	0.138	-46.9	0.220	-165.4
1.8	0.636	55.8	1.897	-51.3	0.142	-51.7	0.213	-173.8
1.9	0.643	47.6	1.809	-59.6	0.147	-57.3	0.203	176.6
2.0	0.647	39.1	1.716	-67.9	0.154	-62.0	0.198	166.9
2.1	0.653	30.5	1.649	-76.3	0.160	-68.6	0.192	156.5
2.2	0.656	22.9	1.574	-84.7	0.169	-74.0	0.186	145.4
2.3	0.662	15.0	1.516	-92.6	0.173	-79.2	0.183	133.9
2.4	0.668	6.9	1.455	-100.6	0.184	-85.0	0.181	122.6
2.5	0.672	-0.5	1.404	-108.5	0.191	-90.8	0.177	110.3
2.6	0.681	-8.3	1.352	-116.6	0.199	-95.5	0.181	98.8
2.7	0.685	-15.9	1.307	-124.0	0.207	-102.5	0.182	86.5
2.8	0.687	-23.4	1.257	-131.8	0.214	-108.9	0.186	75.3
2.9	0.695	-30.7	1.226	-139.6	0.224	-114.6	0.189	62.9
3.0	0.701	-38.0	1.187	-147.1	0.233	-120.8	0.196	51.6



V<sub>CE</sub> = 3 V, I<sub>C</sub> = 7 mA

FREQUENCY GHz	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.	MAG.	ANG.
0.1	0.716	-54.8	16.827	141.3	0.073	54.7	0.897	-28.5
0.2	0.659	-100.9	12.791	115.4	0.050	37.9	0.674	-51.3
0.3	0.609	-131.4	9.920	96.6	0.064	28.4	0.543	-64.6
0.4	0.583	-154.2	7.925	81.4	0.068	22.6	0.446	-74.4
0.5	0.575	-171.7	6.631	68.9	0.073	17.5	0.373	-81.3
0.6	0.570	173.1	5.602	57.4	0.079	12.1	0.332	-88.5
0.7	0.569	159.9	4.892	47.2	0.083	5.2	0.297	-93.9
0.8	0.569	148.0	4.323	37.3	0.089	-0.5	0.270	-100.3
0.9	0.571	136.7	3.873	27.8	0.095	-3.9	0.250	-107.7
1.0	0.574	126.6	3.507	18.5	0.099	-8.7	0.234	-113.3
1.1	0.576	116.2	3.224	9.3	0.108	-14.2	0.222	-122.4
1.2	0.581	106.6	2.969	0.3	0.114	-19.6	0.209	-128.4
1.3	0.589	97.8	2.765	-8.3	0.119	-23.3	0.197	-136.5
1.4	0.590	88.6	2.581	-16.9	0.122	-27.9	0.187	-145.1
1.5	0.599	79.8	2.423	-25.6	0.131	-33.9	0.178	-153.4
1.6	0.601	71.2	2.284	-34.0	0.139	-39.4	0.170	-162.1
1.7	0.605	62.7	2.146	-42.5	0.146	-45.0	0.163	-172.0
1.8	0.612	54.4	2.044	-51.0	0.151	-49.4	0.153	179.3
1.9	0.620	46.1	1.948	-59.0	0.160	-56.2	0.149	167.7
2.0	0.623	38.2	1.857	-67.4	0.168	-61.4	0.139	158.0
2.1	0.632	29.8	1.770	-75.3	0.172	-67.6	0.134	146.2
2.2	0.636	22.2	1.695	-83.7	0.183	-73.4	0.130	134.0
2.3	0.638	13.9	1.629	-91.5	0.188	-79.7	0.129	121.3
2.4	0.648	6.1	1.565	-99.7	0.197	-85.2	0.125	109.2
2.5	0.653	-1.4	1.510	-107.5	0.205	-91.3	0.127	95.9
2.6	0.660	-9.1	1.455	-115.4	0.214	-97.2	0.130	82.3
2.7	0.665	-16.4	1.408	-123.1	0.223	-103.4	0.134	68.9
2.8	0.673	-23.9	1.356	-130.8	0.230	-110.5	0.142	56.9
2.9	0.676	-31.3	1.323	-138.4	0.236	-116.8	0.145	44.7
3.0	0.682	-38.4	1.279	-145.9	0.243	-123.1	0.156	34.8



PACKAGE DIMENSIONS

FLAT-LEAD 6 PIN THIN-TYPE ULTRA SUPER MINIMOLD (UNIT: mm)

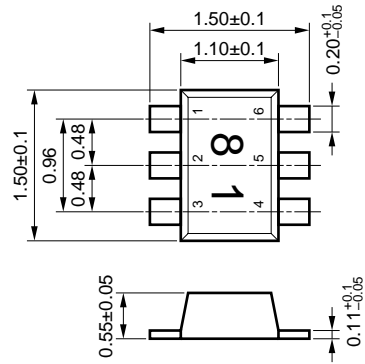

PIN CONNECTIONS

- |                   |                 |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Base (Q2)    |
| 2. Emitter (Q1)   | 5. Emitter (Q2) |
| 3. Collector (Q2) | 6. Base (Q1)    |

[MEMO]

[MEMO]

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
  - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
  - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
  - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
  - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
  - NEC devices are classified into the following three quality grades:  
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
    - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
    - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
    - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.