

- 12.8 VOLT NOMINAL ZENER VOLTAGE $\pm 5\%$
- TEMPERATURE COMPENSATED ZENER REFERENCE DIODES
- LOW NOISE
- METALLURGICALLY BONDED
- DOUBLE PLUG CONSTRUCTION

1N4896
thru
1N4915A

MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 500mW @ +50°C
Power Derating: 4 mW / °C above +50°C

REVERSE LEAKAGE CURRENT

$I_R = 15 \mu A$ @ 25°C & $V_R = 8V_{dc}$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

JEDEC TYPE NUMBER	TEST CURRENT I_{ZT} (Note 3)	VOLTAGE TEMPERATURE STABILITY ΔV_{ZT} (Note 2)	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT	MAXIMUM DYNAMIC IMPEDANCE Z_{ZT} (Note 1)	MAXIMUM NOISE DENSITY N_D
	mA	mV	°C	%/°C	OHMS	$\mu V / \sqrt{Hz}$
1N4896	0.5	96	+25 to +100	0.01	400	0.8
1N4896A	0.5	198	-55 to +100	0.01	400	0.8
1N4897	0.5	48	+25 to +100	0.005	400	0.8
1N4897A	0.5	99	-55 to +100	0.005	400	0.8
1N4898	0.5	19	+25 to +100	0.002	400	0.8
1N4898A	0.5	40	-55 to +100	0.002	400	0.8
1N4899	0.5	10	+25 to +100	0.001	400	0.8
1N4899A	0.5	20	-55 to +100	0.001	400	0.8
1N4900	1.0	96	+25 to +100	0.01	200	0.4
1N4900A	1.0	198	-55 to +100	0.01	200	0.4
1N4901	1.0	48	+25 to +100	0.005	200	0.4
1N4901A	1.0	99	-55 to +100	0.005	200	0.4
1N4902	1.0	19	+25 to +100	0.002	200	0.4
1N4902A	1.0	40	-55 to +100	0.002	200	0.4
1N4903	1.0	10	+25 to +100	0.001	200	0.4
1N4903A	1.0	20	-55 to +100	0.001	200	0.4
1N4904	2.0	96	+25 to +100	0.01	100	0.25
1N4904A	2.0	198	-55 to +100	0.01	100	0.25
1N4905	2.0	48	+25 to +100	0.005	100	0.25
1N4905A	2.0	99	-55 to +100	0.005	100	0.25
1N4906	2.0	19	+25 to +100	0.002	100	0.25
1N4906A	2.0	40	-55 to +100	0.002	100	0.25
1N4907	2.0	10	+25 to +100	0.001	100	0.25
1N4907A	2.0	20	-55 to +100	0.001	100	0.25
1N4908	4.0	96	+25 to +100	0.01	50	0.22
1N4908A	4.0	198	-55 to +100	0.01	50	0.22
1N4909	4.0	48	+25 to +100	0.005	50	0.22
1N4909A	4.0	99	-55 to +100	0.005	50	0.22
1N4910	4.0	19	+25 to +100	0.002	50	0.22
1N4910A	4.0	40	-55 to +100	0.002	50	0.22
1N4911	4.0	10	+25 to +100	0.001	50	0.22
1N4911A	4.0	20	-55 to +100	0.001	50	0.22
1N4912	7.5	96	+25 to +100	0.01	25	0.20
1N4912A	7.5	198	-55 to +100	0.01	25	0.20
1N4913	7.5	48	+25 to +100	0.005	25	0.20
1N4913A	7.5	99	-55 to +100	0.005	25	0.20
1N4914	7.5	19	+25 to +100	0.002	25	0.20
1N4914A	7.5	40	-55 to +100	0.002	25	0.20
1N4915	7.5	10	+25 to +100	0.001	25	0.20
1N4915A	7.5	20	-55 to +100	0.001	25	0.20

NOTE 1 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

NOTE 2 The maximum allowable change observed over the entire temperature range, per JEDEC standard No.5.

NOTE 3 Zener voltage range equals 12.8 volts $\pm 5\%$.

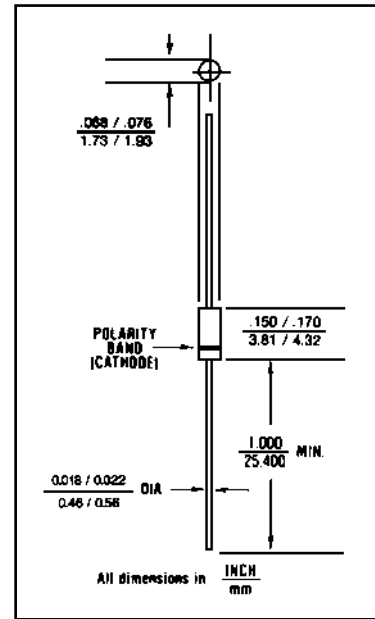


FIGURE 1

DESIGN DATA

CASE: Hermetically sealed glass case. DO – 35 outline.

LEAD MATERIAL: Copper clad steel.

LEAD FINISH: Tin / Lead

POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING POSITION: Any.



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176

PHONE (781) 665-1071

FAX (781) 665-7379

WEBSITE: <http://www.cdi-diodes.com>

E-mail: mail@cdi-diodes.com



For the complete DATASHEET please visit www.searchdatasheets.com and [register](#) as a paying customer.

Price starting at: \$50 US for a weekly membership.
\$150 US for 3 months membership, and \$500 US for a yearly membership.

“Searchdatasheets provides users with one of the Internet’s most complete sources for obsolete datasheets,” said Ariel Zriel, President, Market Maker Systems.

As the life-cycle of components is shortened by the constant demand for faster and better technology, electronics parts are being rendered obsolete at an unprecedented rate. Searchdatasheets gathers and stores the fact sheets, which explain how to use those components.

“Once a component manufacturer decides to eliminate a component datasheet from its web site,” said Zriel, “we take over and list it along with the millions of other datasheets that our users can quickly access.”

Users can perform standard searches for datasheets, or use the cross-reference search option if they want to find a compatible part from another manufacturer.

Searchdatasheets also informs its users when parts are going to become obsolete, providing them with timely product change notification (PCN), product discontinuation notices (PDN) and end of life (EOL) notification.

Searchdatasheets is the only database of its kind that has components engineers onstaff.

That means users can count on assistance from qualified personnel when performing cross-reference searches. Searchdatasheets engineers also regularly research and add and new datasheets to the system.

“We have full-time Engineers on-staff to research and add datasheets if the information is not currently on our site,” said Zriel. “We are providing a place for users to have their questions answered quickly. Our aim is to build a community for components engineers who need help in product design.”

For information or to contact us:

Market Maker Systems Canada
Phone: 1-514-333-1245
Fax: 1-514-333-1489
Email: sales@searchdatasheets.com

