

Rectifier diode

1SR154-400 / 1SR154-600

●Applications

- 1) General purpose rectification
- 2) Surge absorption


●Features

- 1) Small surface mounting type. (PMDS)
- 2) High reliability.
- 3) Outstanding reverse surge capability.

●Construction

Silicon diffused junction

●External dimensions (Units: mm)

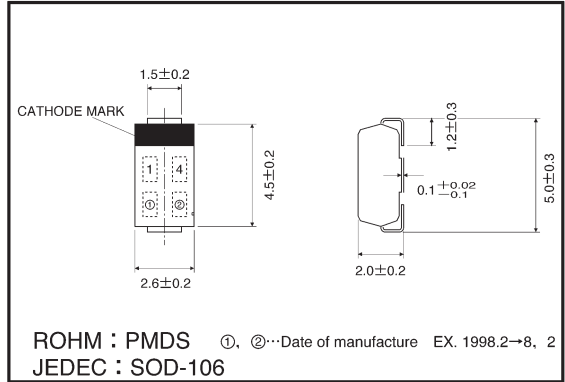

●Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit
Absolute peak reverse voltage	1SR154-400	V _{RSM}	500	V
	1SR154-600		750	
Peak reverse voltage	1SR154-400	V _{RM}	400	V
	1SR154-600		600	
Mean rectifying current*1		I _O	1.0	A
Peak forward surge current*2		I _{FSM}	30	A
Junction temperature		T _J	150	°C
Storage temperature		T _{stg}	-55~+150	°C

*1 When mounted on an alumina PCB board *2 60 Hz for 1

●Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	
Forward voltage	V _F	—	0.95	1.1	V	I _F =1.0A	
Reverse current	1SR154-400	I _R	—	0.030	10	μA	V _R =400V
	1SR154-600		—	0.040	10		V _R =600V

●Electrical characteristic curves (Ta = 25°C unless specified otherwise)

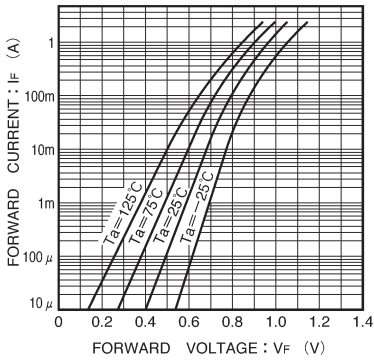


Fig. 1 Forward characteristics

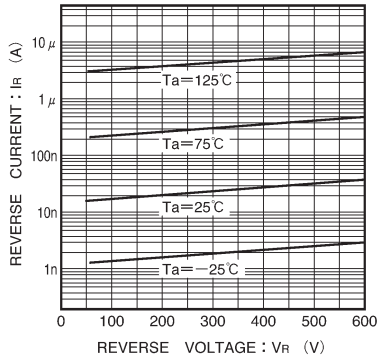


Fig. 2 Reverse characteristics

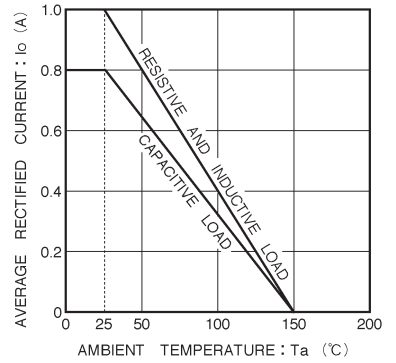


Fig. 3 Derating curve

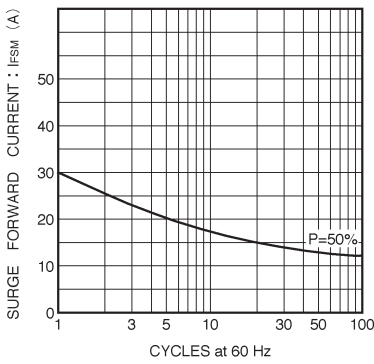


Fig. 4 Surge current characteristics