



STPS3045CP/CPI/CW

POWER SCHOTTKY RECTIFIERS

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	2x15 A
V_{RRM}	45 V
V_F	0.57 V

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREMELY FAST SWITCHING
- LOW FORWARD VOLTAGE DROP
- HIGH AVALANCHE CAPABILITY
- LOW THERMAL RESISTANCE
- INSULATED PACKAGE :TOP-3I
Insulating voltage = 2500V_{RMS}
Capacitance = 12pF


DESCRIPTION

Dual center tap schottky rectifier suited for switchmode power supply and high frequency DC to DC converters.

Packaged in SOT-93, TOP-3I or TO-247 this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
V_{RRM}	Repetitive peak reverse voltage			45	V
$I_{F(RMS)}$	RMS forward current		Per diode	30	A
$I_{F(AV)}$	Average forward current $\delta = 0.5$	SOT-93 TO-247	$T_c = 135^\circ\text{C}$ Per diode	15	A
		TOP-3I	$T_c = 125^\circ\text{C}$ Per device	30	
I_{FSM}	Surge non repetitive forward current		$t_p = 10 \text{ ms}$ Sinusoidal Per diode	220	A
I_{RRM}	Peak repetitive reverse current		$t_p = 2 \mu\text{s}$ $F = 1 \text{ kHz}$ Per diode	1	A
T_{stg}	Storage temperature range			- 65 to + 175	$^\circ\text{C}$
T_j	Maximum junction temperature			150	$^\circ\text{C}$
dV/dt	Critical Rate of Rise of Reverse Voltage			10000	V/ μs

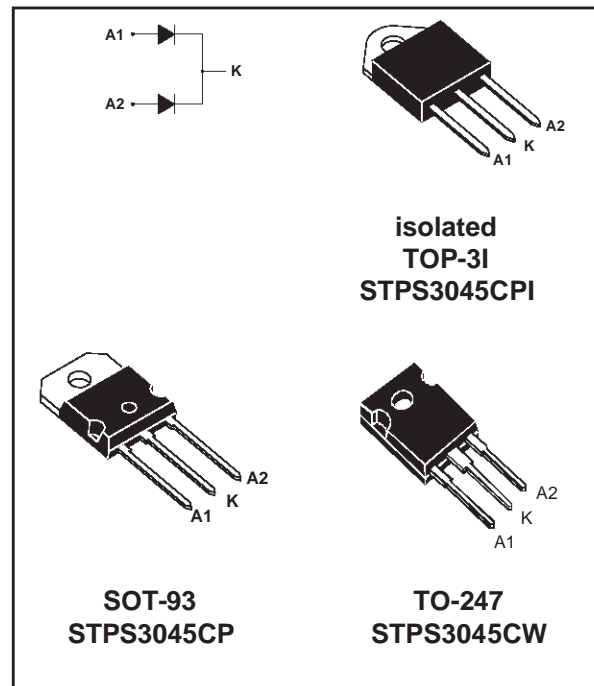

STPS3045CP/CPI/CW

THERMAL RESISTANCES

Symbol	Parameter		Value	Unit	
R _{th(j-c)}	Junction to case	SOT-93/ TO-2247	Per diode total	1.5 0.8	°C/W
		TOP-3I	Per diode total	2.2 1.6	
R _{th(c)}	Coupling	SOT-93/ TO-247		0.1	°C/W
		TOP-3I		1.0	

When the diodes 1 and 2 are used simultaneously :

$$\Delta T_J(\text{diode } 1) = P(\text{diode } 1) \times R_{th}(\text{Per diode}) + P(\text{diode } 2) \times R_{th(c)}$$

STATIC ELECTRICAL CHARACTERISTICS (per diode)

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
I _R *	Reverse leakage current	T _j = 25°C	V _R = V _{RRM}			200	μA
		T _j = 125°C				40	mA
V _F **	Forward voltage drop	T _j = 125°C	I _F = 30 A			0.72	V
		T _j = 125°C	I _F = 15 A			0.57	
		T _j = 25°C	I _F = 30 A			0.84	

Pulse test : * t_p = 5 ms, δ < 2 %

** t_p = 380 μs, δ < 2%

To evaluate the conduction losses use the following equation :

$$P = 0.42 \times I_{F(av)} + 0.01 I_{F(RMS)}^2$$

Fig. 1: Average forward power dissipation versus average forward current (per diode).

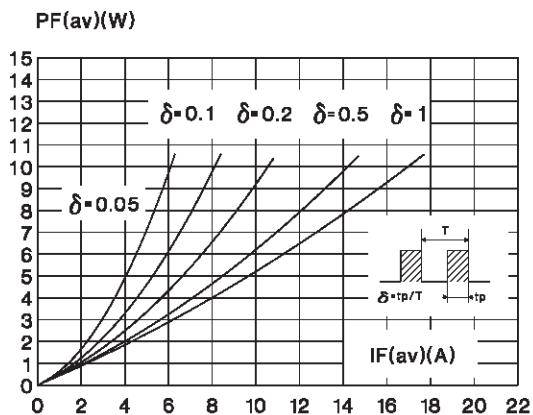


Fig. 2: Average current versus ambient temperature (per diode) (SOT-93 and TO-247).

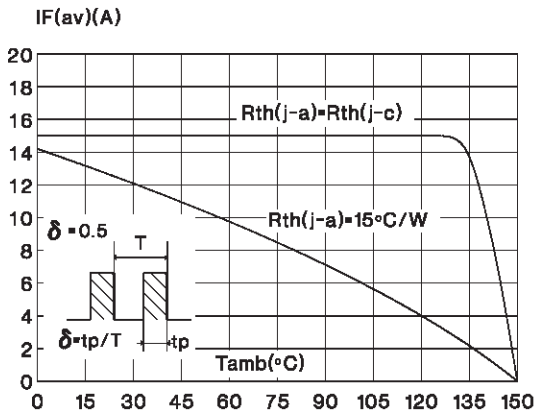


Fig. 3: Average current versus ambient temperature (per diode) (TOP-3I).

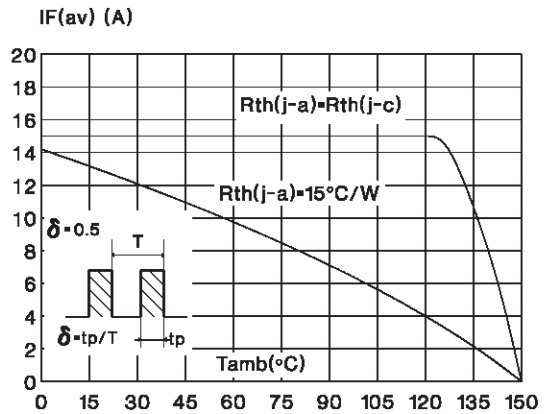


Fig. 4: Non repetitive surge peak forward current versus overload duration (maximum values) (per diode) (SOT-93 and TO-247).

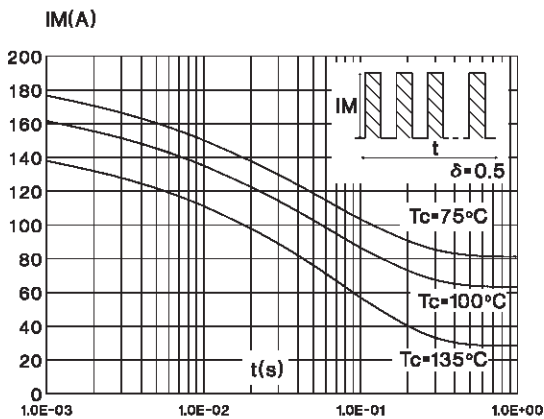


Fig. 5: Non repetitive surge peak forward current versus overload duration (maximum values) (per diode) (TOP-3I).

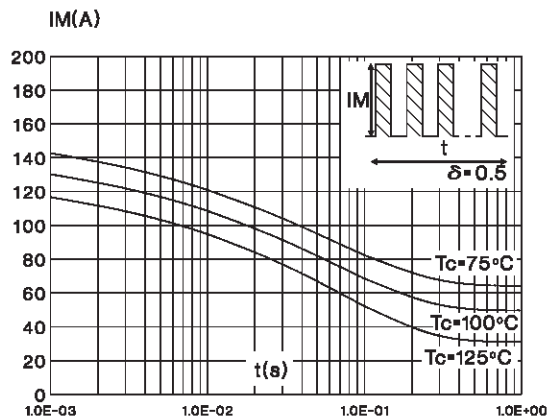


Fig. 6: Relative variation of thermal transient impedance junction to case versus pulse duration.


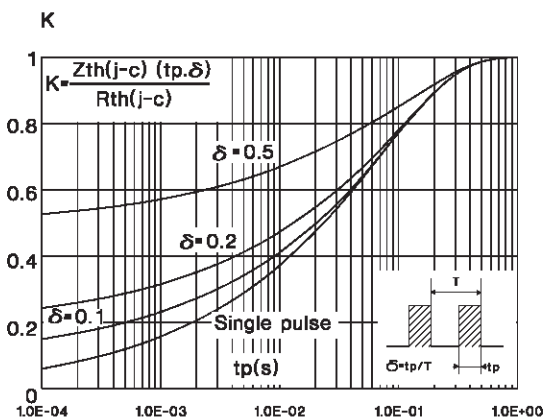


Fig. 7: Reverse leakage current versus reverse voltage applied (typical values) (per diode).

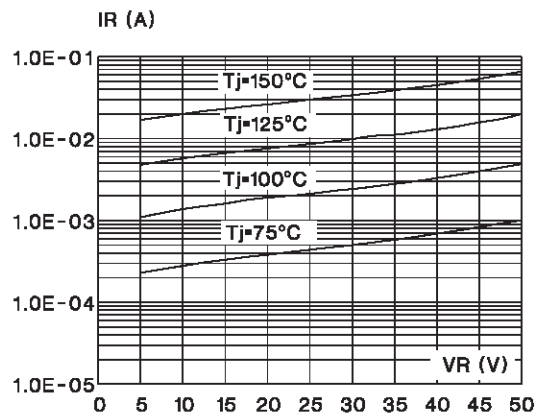

STPS3045CP/CPI/CW

Fig. 8: Junction capacitance versus reverse voltage applied (typical values) (per diode).



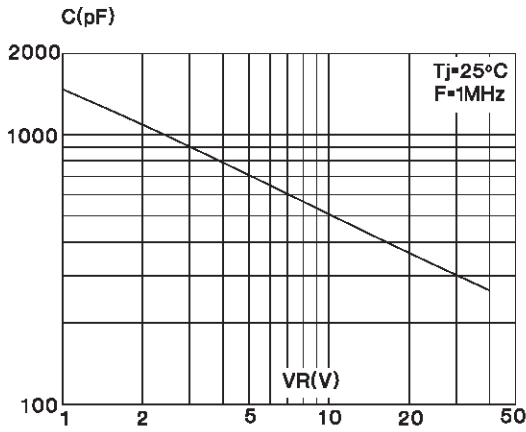


Fig. 9: Forward voltage drop versus forward current (maximum values) (per diode).

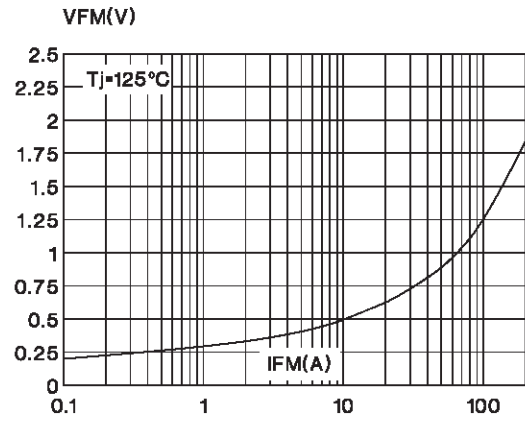

PACKAGE MECHANICAL DATA SOT-93

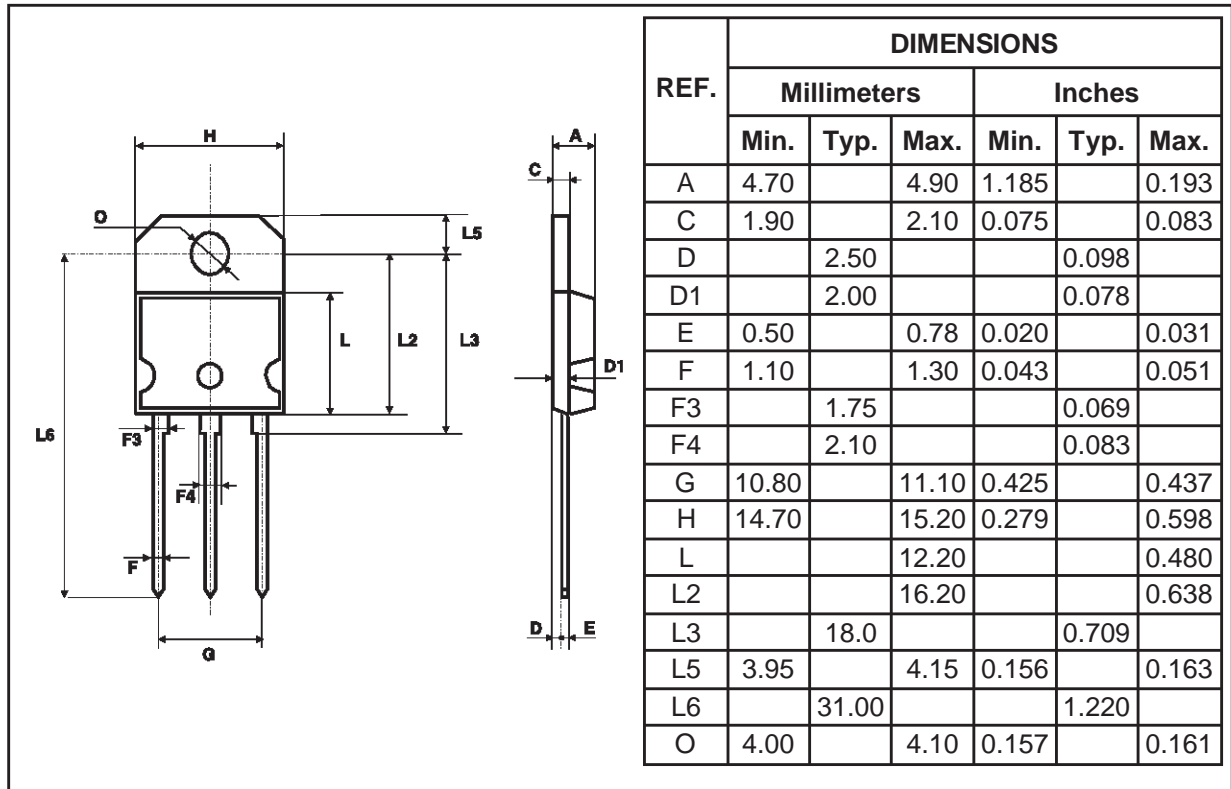


- **Marking** : Type number
- Cooling method : C
- Weight : 5.3 g
- Recommended torque value : 0.8m.N
- Maximum torque value : 1.0m.N

PACKAGE MECHANICAL DATA
 TOP-3I (isolated)

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.5		0.7	0.020		0.028
E	2.7		2.9	0.106		0.114
F	15.8		16.5	0.622		0.650
G	20.4		21.1	0.815		0.831
H	15.1		15.5	0.594		0.610
J	5.4		5.65	0.213		0.222
K	3.4		3.65	0.134		0.144
L	4.08		4.17	0.161		0.164
P	1.20		1.40	0.047		0.055
R		4.60			0.181	

- **Marking** : Type number
- **Cooling method** : C
- **Weight** : 4.7 g
- **Recommended torque value** : 0.8m.N
- **Maximum torque value** : 1.0m.N

PACKAGE MECHANICAL DATA
TO-247

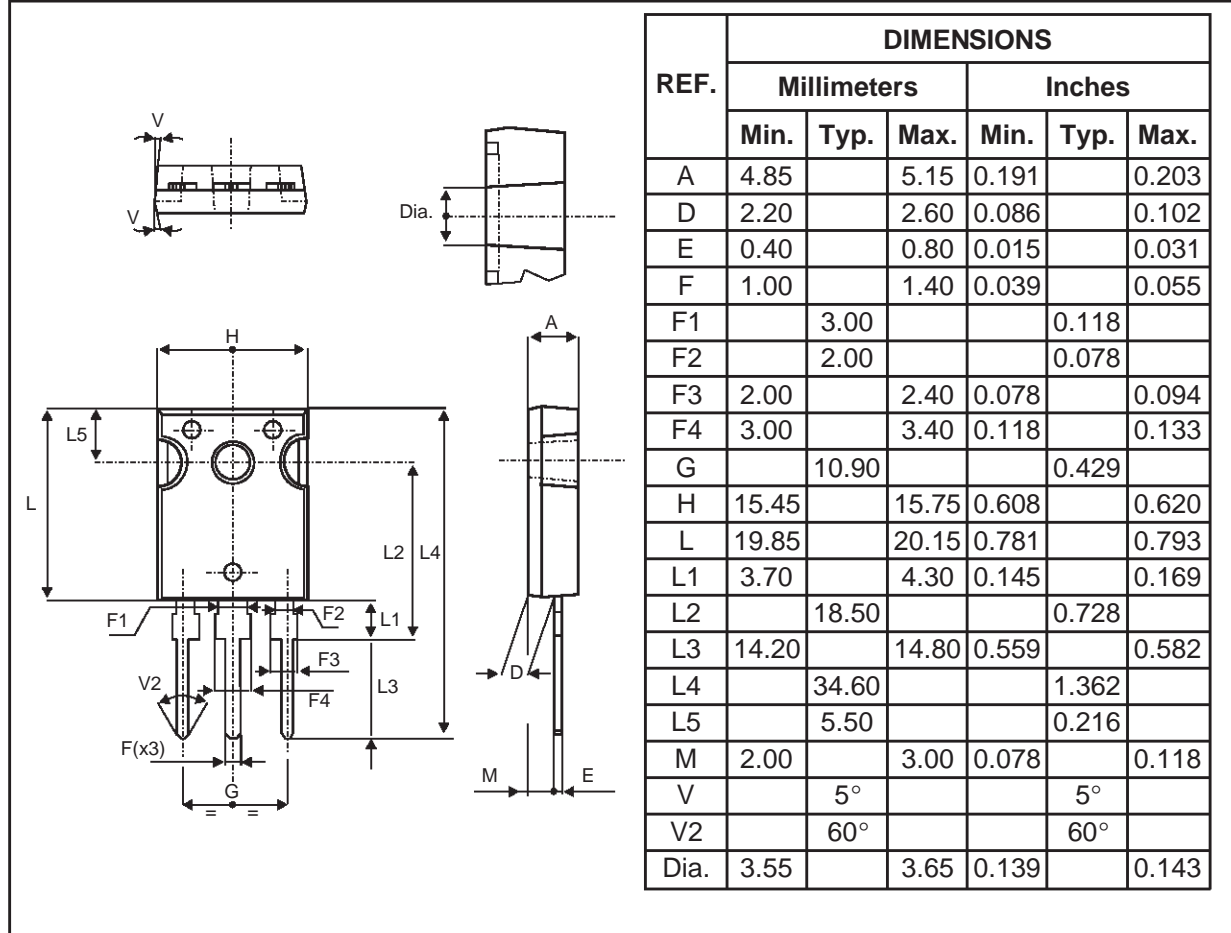

- **Marking** : Type number
- **Cooling method**: C
- **Weight** : 4.4 g
- **Recommended torque value** : 0.8m.N
- **Maximum torque value** : 1.0m.N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.