

PATRIOT GUITAR SERIES

TEXAS HEAT™

The Eminence Texas Heat is the All-American guitar speaker that's packin' heat, Texas style. It delivers a nice warm, fat tone with top end bite and clarity to cut through a mix while maintaining a rich, bluesy tone. Very touch-sensitive with a hint of British flavor.

12" | 150 WATTS
8, 4 OR 16 Ω



SPECIFICATION

| | |
|-------------------------|-----------------|
| Nominal Basket Diameter | 12", 305 mm |
| Nominal Impedance* | 8, 4 or 16 Ω |
| Power Rating* | 150 W |
| Resonance (Fs) | 79 Hz |
| Usable Frequency Range | 70 Hz – 4.7 kHz |
| Sensitivity* | 99.4 dB |
| DC Resistance (Re) | 7.3 Ω |
| Qts | 0.65 |
| Magnet Weight | 38 oz. |
| Gap Height | 0.31", 7.9 mm |
| Voice Coil Diameter | 2", 51 mm |


MOUNTING INFORMATION

| | |
|-------------------------|------------------------|
| Enclosure Type | Closed Back |
| Open Back | Acceptable |
| Driver Volume Displaced | 0.071 cu.ft., 2 liters |
| Overall Diameter | 12.03", 305.6 mm |
| Baffle Hole Diameter | 11.07", 281.2 mm |
| Depth | 5.1", 129.5 mm |
| Front Sealing Gasket | Yes |
| Rear Sealing Gasket | Yes |
| Mounting Holes Diameter | 0.25", 6.4 mm |
| Mounting Holes B.C.D. | 11.59", 294.4 mm |
| Net Weight | 8.3 lbs , 3.76 kg |
| Shipping Weight | 10 lbs , 4.54 kg |

MATERIALS OF CONSTRUCTION

| |
|----------------------|
| Copper voice coil |
| Polyimide former |
| Ferrite magnet |
| Non-vented core |
| Pressed steel basket |
| Paper cone |
| Paper cone edge |
| Zurette dust cap |

FREQUENCY RESPONSE & IMPEDANCE CURVE*

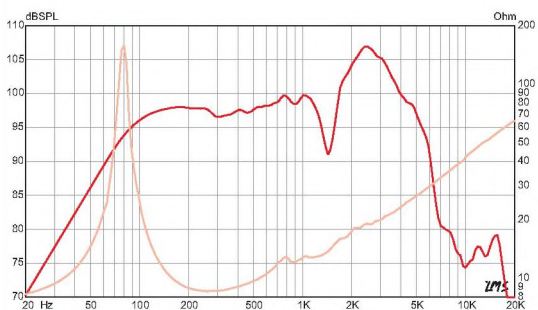

* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.