
DISCRETE SEMICONDUCTORS

DATA SHEET



BB134UHF variable capacitance diode

Product specification Supersedes data of November 1993 File under Discrete Semiconductors, SC01 1996 May 03





UHF variable capacitance diode


BB134

FEATURES

- · Excellent linearity
- Excellent matching to 0.5% DMA
- Very small plastic SMD package
- C28: 1.9 pF; ratio: 10
- Low series resistance.

APPLICATIONS

- Electronic tuning in UHF television tuners
- VCO.

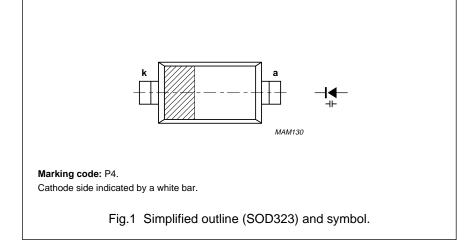

DESCRIPTION

The BB134 is a variable capacitance diode, fabricated in planar technology, and encapsulated in the SOD323 very small plastic SMD package.

The excellent matching performance is achieved by a direct matching assembly procedure. The unmatched type, BB135 has the same specification.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | MIN. | MAX. | UNIT |
|------------------|--------------------------------|------------|------|------|
| V _R | continuous reverse voltage | _ | 30 | V |
| I _F | continuous forward current | _ | 20 | mA |
| T _{stg} | storage temperature | -55 | +150 | °C |
| Tj | operating junction temperature | -55 | +125 | °C |

ELECTRICAL CHARACTERISTICS

 $T_i = 25$ °C; unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|----------------------------------|-------------------------|---|------|------|------|------|
| I _R | reverse current | V _R = 30 V; see Fig.3 | _ | _ | 10 | nA |
| | | V _R = 30 V; T _j = 85 °C; see Fig.3 | _ | _ | 200 | nA |
| r _s | diode series resistance | f = 470 MHz; note 1 | _ | _ | 0.75 | Ω |
| C _d | diode capacitance | V _R = 0.5 V; f = 1 MHz; see Figs 2 and 4 | 17.5 | _ | 21 | pF |
| | | V _R = 28 V; f = 1 MHz; see Figs 2 and 4 | 1.7 | _ | 2.1 | pF |
| $\frac{C_{d(0.5V)}}{C_{d(28V)}}$ | capacitance ratio | f = 1 MHz | 8.9 | _ | 12 | |
| $\frac{\Delta C_d}{C_d}$ | capacitance matching | $V_R = 0.5$ to 28 V; in a sequence of 4 diodes (gliding) | _ | _ | 0.5 | % |
| - a | | $V_R = 0.5$ to 28 V; in a sequence of 15 diodes (gliding) | _ | _ | 2 | % |

Note


1. V_R is the value at which $C_d = 9$ pF.

1996 May 03 2

UHF variable capacitance diode

BB134

GRAPHICAL DATA

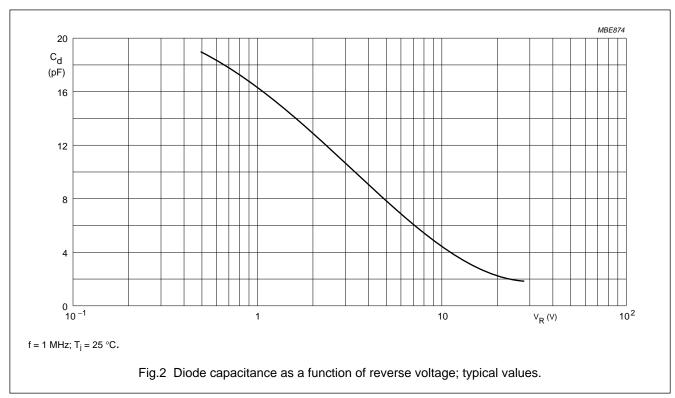


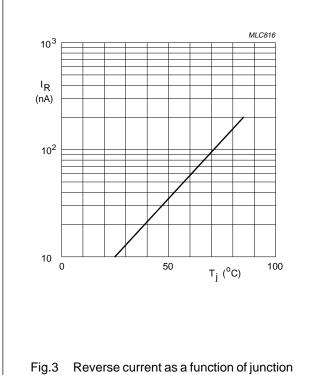


Fig.3 Reverse current as a function of junction temperature; maximum values.

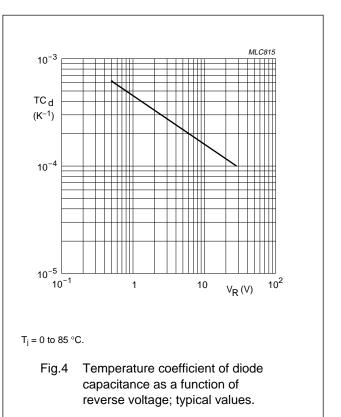


1996 May 03 3

Philips Semiconductors Product specification

UHF variable capacitance diode

BB134

PACKAGE OUTLINE

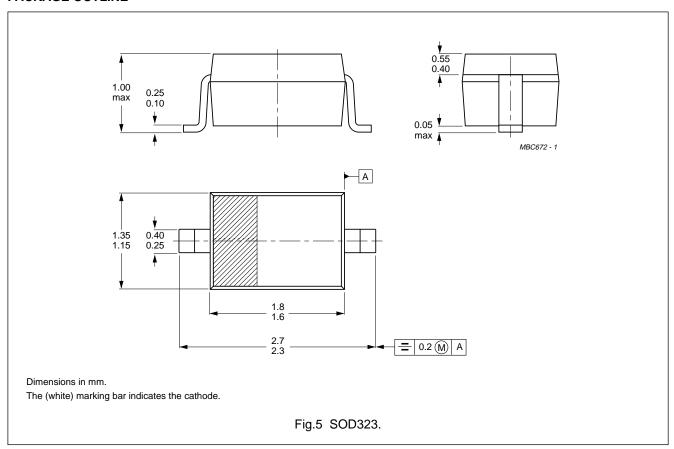

DEFINITIONS

| Data sheet status | | | |
|---------------------------|---|--|--|
| Objective specification | This data sheet contains target or goal specifications for product development. | | |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published late | | |
| Product specification | This data sheet contains final product specifications. | | |
| Limiting values | | | |

Limiting values

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Where application information is given, it is advisory and does not form part of the specification.

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

1996 May 03 4