


Very Fast Soft Recovery Rectifier

Features

- Miniature axial leaded
- Glass passivated
- Hermetically sealed glass envelope
- Low reverse current
- High reverse voltage

Applications

TV and monitor SMPS Electronic ballast



Absolute Maximum Ratings

 $T_j = 25\,^{\circ}C$

Parameter	Test Conditions	Туре	Symbol	Value	Unit
Repetitive peak reverse		BYT43A	V _{RRM}	50	V
voltage		BYT43B	V _{RRM}	100	V
		BYT43D	V _{RRM}	200	V
		BYT43G	V _{RRM}	400	V
		BYT43J	V _{RRM}	600	V
		BYT43K	V _{RRM}	800	V
		BYT43M	V _{RRM}	1000	V
Reverse voltage		BYT43A	V_{R}	50	V
		BYT43B	V_R	100	V
		BYT43D	V_R	200	V
		BYT43G	V_{R}	400	V
		BYT43J	V_R	600	V
		BYT43K	V_{R}	800	V
		BYT43M	V_R	1000	V
Peak forward surge current	t _p =8.3 ms, half sinewave		I _{FSM}	30	A
Average forward current	Lead length $l = 10$ mm, $T_L = 25$ °C		I _{FAV}	1	A
Junction temperature			Tj	175	°C
Storage temperature range			T _{stg}	-55+175	°C



Maximum Thermal Resistance

 $T_j = 25\,^{\circ}C$

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	Lead length $l = 10$ mm, $T_L = constant$	R_{thJA}	60	K/W
	on PC board with spacing 25mm	R_{thJA}	110	K/W

Characteristics

 $T_j = 25\,^{\circ}C$

Parameter	Test Conditions	Type	Symbol	Min	Тур	Max	Unit
Forward voltage	$I_F = 1 A$	BYT43A	V_{F}			1.6	V
		BYT43B	$V_{\rm F}$			1.6	V
		BYT43D	$V_{\rm F}$			1.6	V
		BYT43G	$V_{\rm F}$			1.6	V
		BYT43J	V_{F}			1.6	V
		BYT43K	V_{F}			2	V
		BYT43M	$V_{\rm F}$			2	V
Reverse current	$V_R = V_{RRM}$		I _R			5	μΑ
	$V_R = V_{RRM}, T_j = 150$ °C		I_R			150	μΑ
Reverse breakdown	I _R =100μA	BYT43A	V _{(BR)R}	50			V
voltage		BYT43B	V _{(BR)R}	100			V
		BYT43D	V _{(BR)R}	200			V
		BYT43G	V _{(BR)R}	400			V
		BYT43J	V _{(BR)R}	600			V
		BYT43K	V _{(BR)R}	800			V
		BYT43M	V _{(BR)R}	1000			V
Reverse recovery time	I _F =0.5A, I _R =1A, i _R =0.25A	BYT43A	t _{rr}			50	ns
		BYT43B	t _{rr}			50	ns
		BYT43D	t _{rr}			50	ns
		BYT43G	t _{rr}			50	ns
		BYT43J	t _{rr}			50	ns
		BYT43K	t _{rr}			75	ns
		BYT43M	t _{rr}			75	ns

Typical Characteristics $(T_j = 25^{\circ}C \text{ unless otherwise specified})$





Figure 1. Epoxy glass hard tissue, board thickness 1.5 mm, $R_{thJA} \, {\leq} \, 110 \; K/W$



 $Figure\ 4.\ Average\ Forward\ Current\ vs.\ Ambient\ Temperature$




Figure 2. Thermal Resistance vs. Lead Length




Figure 5. Reverse Current vs. Junction Temperature




Figure 3. Average Forward Current vs. Ambient Temperature




Figure 6. Forward Current vs. Forward Voltage





Figure 7. Forward Current vs. Forward Voltage

Dimensions in mm



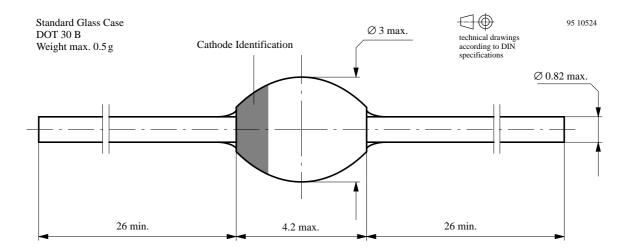

Ozone Depleting Substances Policy Statement

It is the policy of **TEMIC TELEFUNKEN microelectronic GmbH** to

- 1. Meet all present and future national and international statutory requirements.
- Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

TEMIC TELEFUNKEN microelectronic GmbH semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

TEMIC can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423