

CLL4614 THRU CLL4627

**SURFACE MOUNT  
500mW LOW NOISE  
SILICON ZENER DIODES  
5% TOLERANCE**



**SOD-80 CASE**

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CLL4614 Series Silicon Zener Diode is a high quality voltage regulator designed for low leakage, low current and low noise applications.

**MARKING CODE: CATHODE BAND**

**ABSOLUTE MAXIMUM RATINGS**

Power Dissipation (@  $T_A=25^{\circ}\text{C}$ )

Operating and Storage Temperature

**SYMBOL**

$P_D$

$T_J, T_{stg}$

500

-65 to +200

**UNITS**

mW

$^{\circ}\text{C}$

**ELECTRICAL CHARACTERISTICS:**


( $T_A=25^{\circ}\text{C}$ )  $V_F=1.0\text{V MAX @ } I_F=200\text{mA FOR ALL TYPES}$

TYPE NO.	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	$V_Z@I_{ZT}$	$I_{ZT}$	$Z_{ZT}@I_{ZT}$	$I_R@V_R$		$I_{ZM}$	$N_D@I_{ZT}=250\mu\text{A}$
	VOLTS	$\mu\text{A}$	$\Omega$	$\mu\text{A}$	VOLTS	mA	$\mu\text{V}/\sqrt{\text{Hz}}$
CLL4614*	1.8	250	1200	7.5	1.0	120	1.0
CLL4615*	2.0	250	1250	5.0	1.0	110	1.0
CLL4616*	2.2	250	1300	4.0	1.0	100	1.0
CLL4617*	2.4	250	1400	2.0	1.0	95	1.0
CLL4618*	2.7	250	1500	1.0	1.0	90	1.0
CLL4619*	3.0	250	1600	0.8	1.0	85	1.0
CLL4620*	3.3	250	1650	7.5	1.5	80	1.0
CLL4621*	3.6	250	1700	7.5	2.0	75	1.0
CLL4622*	3.9	250	1650	5.0	2.0	70	1.0
CLL4623*	4.3	250	1600	4.0	2.0	65	1.0
CLL4624*	4.7	250	1550	10	3.0	60	1.0
CLL4625*	5.1	250	1500	10	3.0	55	2.0
CLL4626*	5.6	250	1400	10	4.0	50	4.0
CLL4627*	6.2	250	1200	10	5.0	45	5.0

\*Available on special order; consult factory.

R4 (13-November 2002)

SOD-80 CASE - MECHANICAL OUTLINE

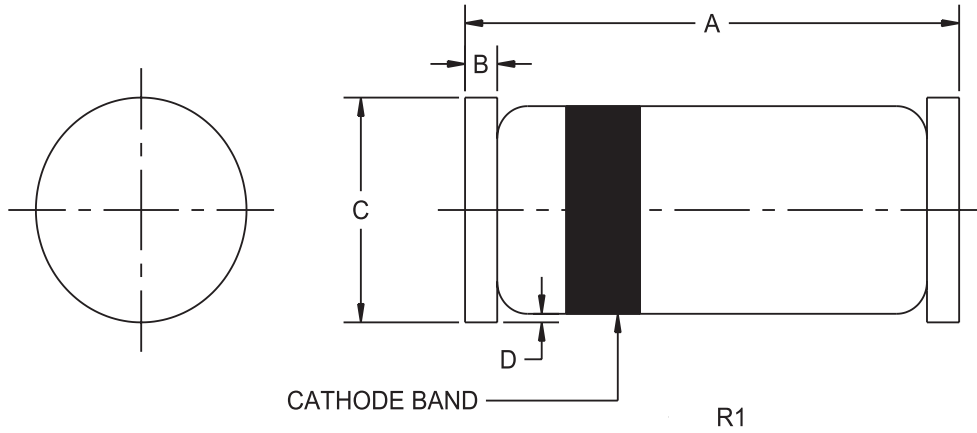

MARKING CODE: CATHODE BAND

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.130	0.146	3.30	3.71
B	0.016		0.41	
C (DIA)	0.051	0.067	1.30	1.70
D	-	0.004	-	0.10

SOD-80 (REV:R1)